

XB12 21 joule xenon strobe range

Hazardous locations,
ordinary locations



Overview

These high output certified strobes have been designed for use in potentially explosive atmospheres and harsh environmental conditions.

The enclosures are suitable for use offshore or onshore, where lightweight combined with corrosion resistance is required.

The strobe housing is manufactured completely from a U.V. stable, glass reinforced polyester. Stainless steel screws and mounting bracket are incorporated ensuring a totally corrosion-free product.

Units can be painted to customer specification and supplied with identification labels.

European and other worldwide approvals are available.

Features

- UL listed for USA and Canada
 - Hazardous locations:
 - Class I, Div. 2, Groups C & D
 - Class I Zones 1 & 2, AExd IIB T4
 - Ordinary locations: visual-signal device
 - Marine listed
- CSFM approved
- ATEX approved
- Xenon
- High output (124,000 candelas)
- NEMA 4x and 6, IP66 & 67
- Certified temperature:
 - 67°F to +158°F
 - 55°C to +70°C
- 4 Wire monitored connection
- 24V d.c., 110 & 240V a.c
- Corrosion resistant GRP
- Optional stainless steel backstrap
- Various lens colours
- Optional lens guard
- Twin replaceable tubes



Certifications	
UL Haz Locs	Cert. no. E187894
UL Ord Locs/Marine	Cert. no. S8128 visual signal device
UL certified for use in USA	Class I, Div. 2, Groups C & D Class I, Zone 1&2, AEx d IIB T4/T5
Specifications	
Material	Body: glass reinforced polyester Lens: toughened glass Cover screws + backstrap: stainless steel 316
Finish	Natural black or painted to customer specification
Weight	15½ lb/7.0kg
Certified temp	-67°F to +158°F (-55°C to +70°C)
Ingress protection	NEMA 4x and 6, IP66 & 67
Terminals	6 off suitable for up to 10 AWG conductor size
Labels	Duty/tag label optional
Entries	2 x ½" NPT
Tube life	>1 x 10 ⁶ Flashes

Electrical ratings

	d.c.	a.c. 50/60Hz	
Voltage	24	110	240
XB12 tube energy (Joules)	21	21	21
Current (mA)	1400	350	185
Effective intensity (Cd)	355	355	355
Peak intensity (Cd)	123691	123691	123691
Power consumption (Watts)	33.6	38.5	44.4


Note: The Cd figures are for a clear lens @ 1Hz flash rate

Multiplying factor for coloured lenses

Red	Blue	Amber	Green	Yellow
0.15	0.12	0.51	0.49	0.86

The photometric data has been verified by BSI. A report is available if required

General arrangement drawing (all dimensions in inches)

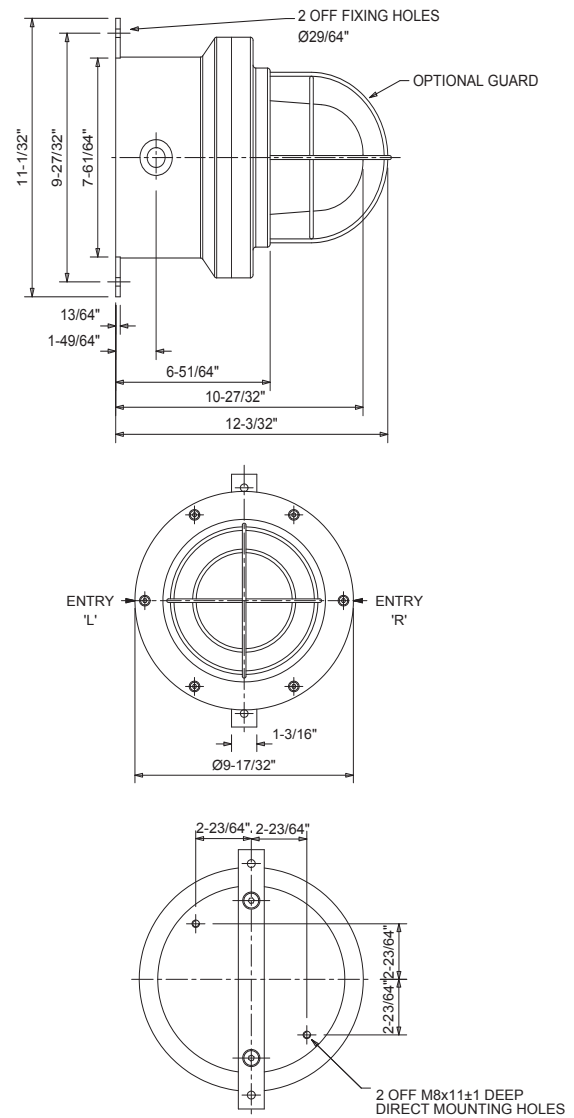

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Model	Certification	Voltage	Flashrate	Lens colour	Lens guard	Fixings	Earth continuity	Tag/duty	Unit options	Finish	
XB12							N				
Certification UL UL (ordinary locations) UL Marine		Fpm 60/min Other flash rates available, please specify		Guard None Yes		Continuity None		Option None Blanking plug		Colour Natural black Red Blue Yellow Grey White Special	
Code UL UW UM		Code 06		Code N Y		Code N		Code N P		Code N R B Y G W S*	
		Voltage 24V d.c. 110V a.c. 240V a.c.		Colour Clear Red Blue Green Yellow Amber		Fixing Direct mount without backstrap Direct mount with backstrap		Label None Yes		Code 024 110 240	
		Code 024 110 240		Code C R B G Y A		Code D B		Code N Y*		Code N R B Y G W S*	
								*Please specify			