

XB4 21 joule xenon strobe range

Hazardous locations, ordinary locations



Overview

These high output strobes have been designed for use in flammable atmospheres and harsh environmental conditions.

The marine grade alloy or stainless steel enclosures are suitable for use offshore or onshore, where lightweight combined with corrosion resistance and strength is required.

Units can be painted to customer specification and fitted with identification labels. European, Russian and other worldwide approvals are available.

Features

- UL listed for USA and Canada
 - Hazardous locations:
 - Class I, Div. 1, Groups C & D
 - Class I, Zone 1, AExd IIB T4
 - Ordinary locations: visual-signal device
- ATEX approved
- Xenon
- NEMA 4x & 6, IP66 & 67
- Certified temperature:
 - 67°F to +158°F
 - 55°C to +70°C
- 4 wire monitored connection
- 24V d.c
- 110V & 240V a.c
- Various lens colours
- Optional lens guard
- Twin replaceable tubes
- Tapered spigot flamepath



Certifications

Certification	- UL Listed for USA and Canada – Hazardous locations: Class I, Div. 1, Groups C & D - Class I, Zone 1, AExd IIB T4 - UL Listing No. E187894 – Ordinary locations: visual-signal device - UL Listing No. S8128
----------------------	--

Specifications

Material	LM25TF marine grade alloy body Grade 316 ANC4B stainless steel body Toughened wellglass
Finish	Epoxy paint finish as standard or to customer specification
Weight	LM25: 14.5lb/6.6kg Stainless steel: add 33lb/15.1kg
Certified temp	-67°F to +158°F -55°C to +70°C
Ingress protection	NEMA 4x & 6, IP66 & IP67
Terminals	8 off suitable for up to 10 AWG conductor size
Relay initiate	Available on all versions
Entries	Up to 3 x ½" or ¾" NPT
Tube life	>1 x 10 ⁶ flashes

Electrical ratings

	d.c.	a.c. 50/60Hz	
Voltage	24	110	240
Tube energy (Joules)	21	21	21
Current (mA)	1400	350	185
Effective intensity (Cd)	355	355	355
Peak intensity (Cd)	123691	123691	123691


NOTE: The Cd figures are for a clear lens @ 1Hz flash rate

Multiplying factor for coloured lenses

Red	Blue	Amber	Green	Yellow
0.15	0.12	0.51	0.49	0.86

The photometric data has been verified by BSI. Reports is available if required

General arrangement drawing (all dimensions in inches)

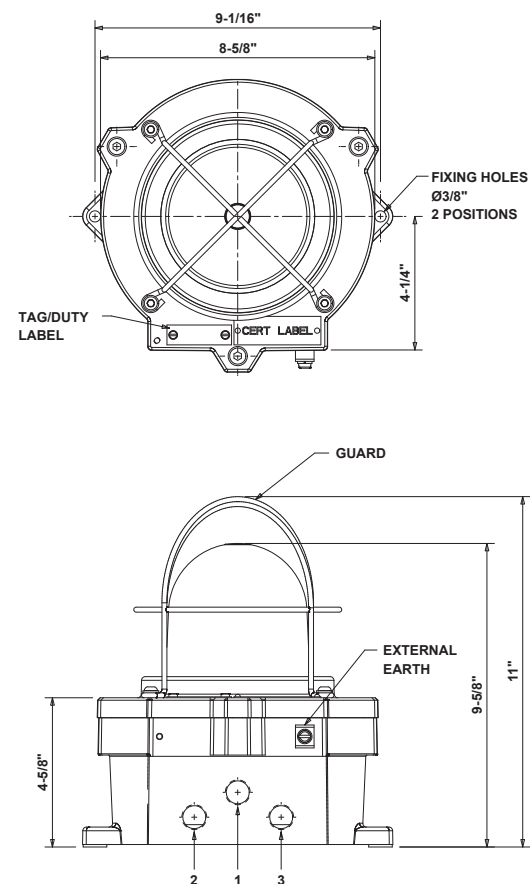

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Model	Certification	Voltage	Terminals	Entries	Flashrate	Options	Guard	Lens colour	Tag/duty	Material	Finish
XB4											
Certification UL UL (ordinary location)		Terminals 8 x 10 AWG		Flashrate 60 120		Guard None Yes		Tag/duty None Yes		Finish Red Blue Yellow Gray White Special	
Code UL UW		Type 8D		Code 06 12		Code N Y		Code N Y*		Code R B Y G W S*	
								* Please specify wording			
		Voltage 24Vdc 110Vac 240Vac		Entries ½" NPT ¾" NPT				Lens colour Red Blue Green Amber Yellow Clear		* Please specify	
		Code B E H		Code *D *E				Code R B G A Y C			
				* Prefix entry size with entry position code (from above diagram e.g. 1D, 2D)							
						Option None Relay(12V-48Vac/dc) Relay(12V-48Vac/dc) & 2nd beacon/sounder				Material Alloy Stainless steel	
						Code A D* E*				Code 1 0	
						* Please specify ac/dc voltage					