

1 2 3 4 5 6 7 8

HEKE V1.1 wifi模块参考电路图

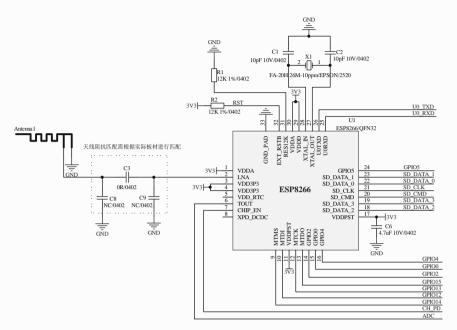

ESP8266

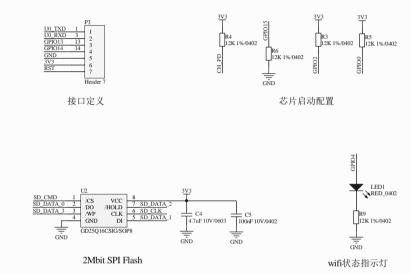

Pii	n Name	Function	Pin	Name	Function	Pin	Name	Function					
1	VDDA	模拟电源3.0~3.3V	12	MTCK	GPIO13, HSPID	23	SDIO_DATA1	GPIO8, SD_MOSI					
2	LNA	射频天线接口	13	MTDO	GPIO15, HSPICS	24	GPIO5	GPIO5					
3	VDD3P3	PA电源3.3V	14	GPIO2	GPIO2	25	U0RXD	GPIO3,					
4	VDD3P3	PA电源3.3V	15	GPIO0	GPIO0, SPICS2	26	U0TXD	GPIO1, SPICS1					
5	VDD_RT0	C NC/1.1V	16	GPIO4	GPIO4	27	XTAL_OUT	晶振输出					
6	TOUT	ADC输入引脚	17	VDDPST	数字和IO电源1.8~3.3V	V 28	XTAL_IN	晶振输入					
7	CHEP_EN	芯片使能引脚: 高电平使	能芯片 18	SDIO_DATA2	GPIO9, SD_2	29	VDDD	数字电源3.0~3.3V					
8	XPD_DCI	OC sleep唤醒,GPIO16	19	SDIO_DATA3	GPIO10, SD_3	30	VDDA	模拟电源3.0~3.3V					
9	MTMS	GPIO14, HSPICLK	20	SDIO_CMD	GPIO11, SD_CS	31	RES12K	串联12K电阻到地					
10	MTDI	GPIO12, HSPIQ	21	SDIO_CLK	GPIO6, SD_CLK	32	EXT_RSTB	外部复位引脚					D
11	VDDPST	数字和IO电源1.8~3.3V	22	SDIO_DATA0	GPIO7, SD_MISO								
									Title				
									Size	Number		Revision	+
									A3				
									Date: File:	2015/10/10 星期六 D:\HEKR项目\\Hekr V1.1.SchDoc	Sheet of Drawn By:		-
1		2	3		4		5	6		7		8	