

Mage Control Systems Ltd. 45 Rankine Avenue East Kilbride F75 0QF				THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO MAGE CONTROL SYSTEMS LTD. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHER PARTIES OR USED FOR ANY PURPOSES OTHER THAT FOR WHICH IT IS FURNISHED WITHOUT PRIOR WRITTEN PERMISSION OF MAGE CONTROL SYSTEMS LTD.		
	Name	Initials	Date	Title:		
Drawn	Peter Konecny	PK	13/04/2022	Interface between eurorack CV and Monotron		
Chkd				Document No:	Rev:	Sheet of
Approved				CV_MONOTRON-002	2	1/3


Eurorack-monotron interface

R20 trimming range worst case:
min: $47 \cdot 101\% / (47 \cdot 101\% + 10 \cdot 90\% + 110 \cdot 99\%) = 0.287$
max: $(47 \cdot 99\% + 10 \cdot 90\%) / (47 \cdot 99\% + 10 \cdot 90\% + 110 \cdot 101\%) = 0.333$
for 5V: Vmin = 1.435V; Vmax = 1.666V

R19 Trimming range worst case:
min: $39.8 \cdot 101\% / (39.8 \cdot 101\% + 10 \cdot 90\% + 50.3 \cdot 99\%) = 0.406$
max: $(39.8 \cdot 99\% + 10 \cdot 90\%) / (39.8 \cdot 99\% + 10 \cdot 90\% + 50.3 \cdot 101\%) = 0.488$

R15, R16 values:
a) voltage divider so that 12V
from gate is scaled down to max 5V:
 $33/80 \cdot 12V = 4.95V$
(not taking into account output impedance of gate signal source)
b) 0R for LM324

Do not place JACKS too close to each other,
as the connectors are wider than the plugs and might not fit

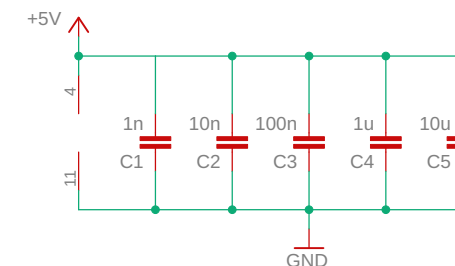

README:
Both gate and pitch testpads on monotron enter a summing op-amp, which controls the VCO. However, the pitch itself does not trigger the VCO enable, while the gate does. The gate starts triggering at about 1.4V and C0 is generated when 1.56V is applied and then its 0.44V/oct. Eurorack voltages are 1V/oct so we need to scale it down to 0.44V/oct and offset it by 1.56V for the lowest note. Moreover, to prevent gate being triggered when note is not playing, the external gate_cv controls a transistor Q1, turning it on when the note is OFF. By turning Q1 ON, the transistor pulls the + junction of the summing op-amp to 0, resulting in the output being 0 as well, which disables the monotron VCO, because its less than 1.4V,

The cutoff_monotron signal connects to a summing op-amp in Monotron. The internal cutoff signal enters the op-amp through 68k resistor so doubling the value to 2*68k will reduce the incoming signal effect by 2. However, it is important to measure the internal cutoff signal to see its magnitude, then choose R17, R18 to scale external signal accordingly. 500k trimmer for attenuation control.

All resistors must be at least 1% accuracy
All capacitors should be rated atleast 5V
unless stated otherwise

Mage Control Systems Ltd. 45 Rankine Avenue East Kilbride F75 0QF				THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO MAGE CONTROL SYSTEMS LTD. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHER PARTIES OR USED FOR ANY PURPOSES OTHER THAT FOR WHICH IT IS FURNISHED WITHOUT PRIOR WRITTEN PERMISSION OF MAGE CONTROL SYSTEMS LTD.		
	Name	Initials	Date	Title: Interface between eurorack CV and Monotron		
Drawn	Peter Konecny	PK	13/04/2022	Document No: CV_MONOTRON-002		
Chkd				Rev:	2	Sheet of 2/3
Approved						

