

Multiwire CONTINUITY TESTER

SURESH CHANDRA DWIVEDI

This multiwire continuity tester is indispensable for electrical and electronic troubleshooting. Designed to verify the integrity

of wiring systems, it identifies breaks, faults, or disconnections in electrical circuits. Commonly used by electricians, technicians, and DIY

enthusiasts, it ensures proper connections and helps prevent system failures.

By applying a small current through the wires, the tester checks for continuity, signaling a complete or broken circuit. Advanced models test multiple wires simultaneously, streamlining diagnostics for complex systems. It is highly useful for determining the connectivity of wires or jumpers when used in a circuit. The author's prototype is shown in Fig. 1.

Circuit and working

Fig. 2 shows the circuit diagram of the multiwire continuity tester. The circuit is built around the CD4047 (IC1), the 4017 decade counter (IC2), ten LEDs, a BC548 transistor (T1), a piezo-buzzer, and a few other components. A 9V

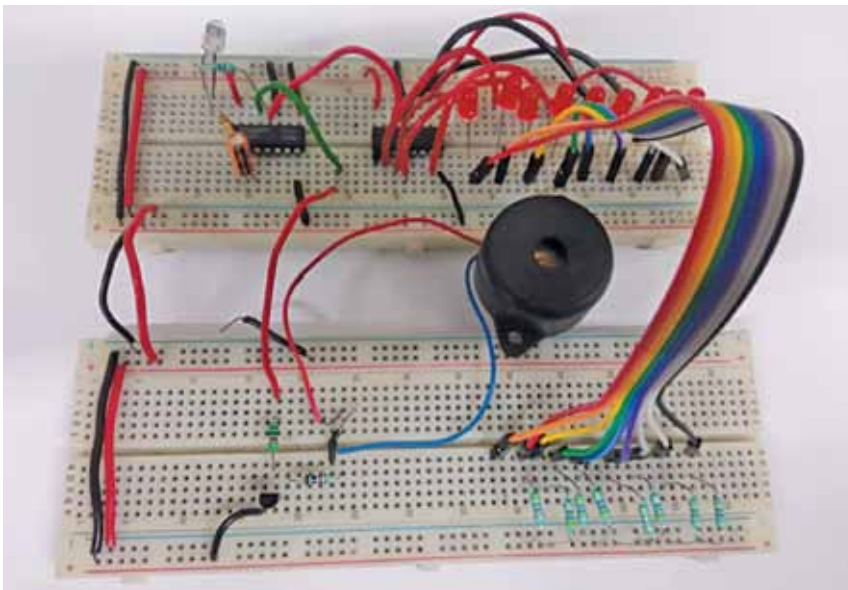


Fig. 1: Author's prototype

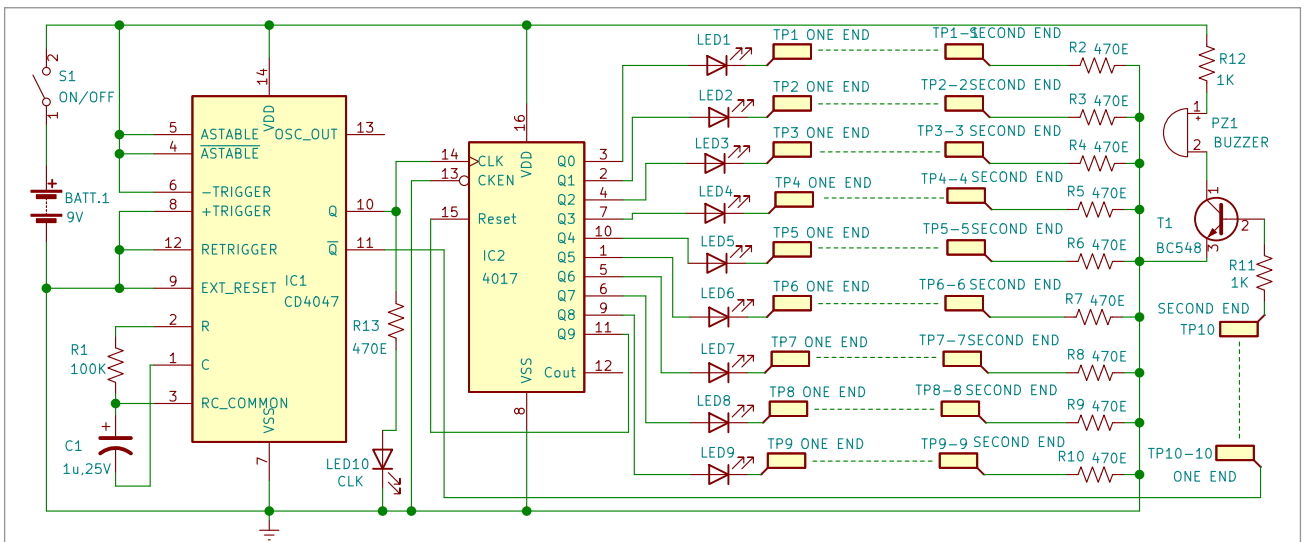


Fig. 2: Circuit diagram