FINDING RESISTANCE VALUES

COLOUR CODING AND MULTIMETER

4

Aim :

To find resistance values using Colour coding and compare the values with Multimeter measurements.

Apparatus Required

SI.No	Apparatus Required	Range/ Values	Quantity
1.	Resistors	½ watt	10 different values
2.	Multimeter	-	1

Diagram

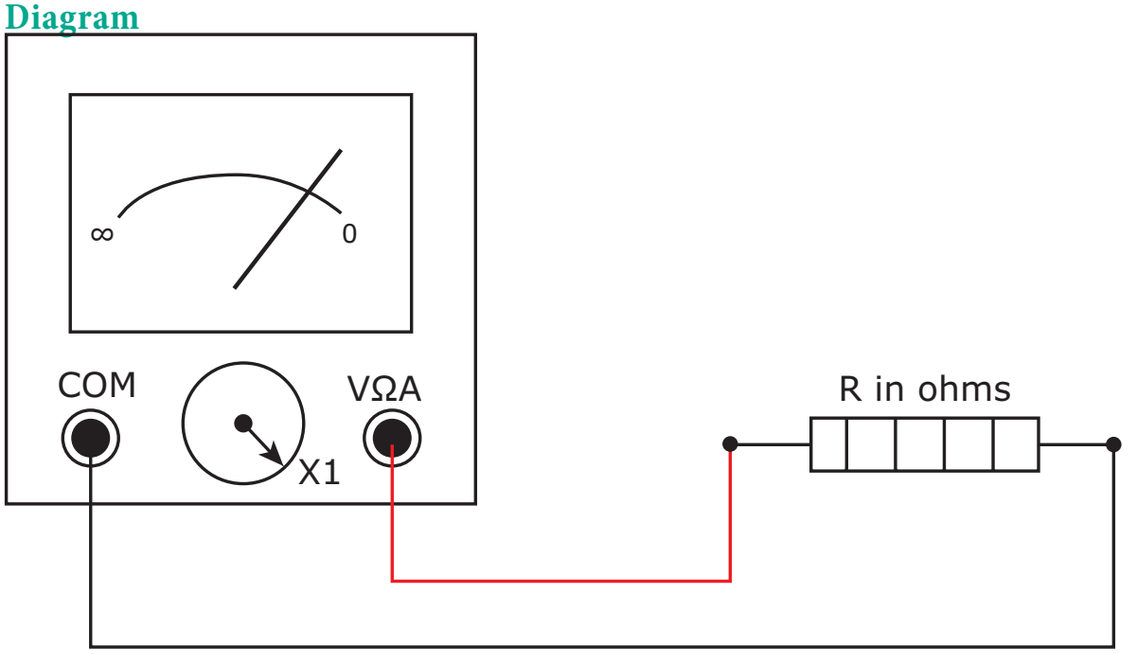


Fig 4.1 Testing of Resistor

Procedure

1. Find the values of given 10 resistors using colour coding and tabulate the same.
2. Select the required ohm's range in the multimeter whenever required. First, set 0 Ω adjustment.
3. Measure the value of resistors one by one using multimeter and tabulate the same.
4. If both values are nearly same, the resistor is said to be in working condition.
5. If meter shows , that is, the needle remain unmoved, the resistor is said to be open. This resistor should not be used in circuits.
6. If meter shows some ohmic value higher than the resistance value, the resistor is 'the high value resistance'. This resistor should not be used in circuits.

EE_Practicals_English Version.indd 244 11/10/2020 12:17:46 PM