6 TESTING OF CAPACITOR–INDUCTOR–TRANSFORMER-RELAY & SPEAKER

Aim:

To know the testing of capacitor, Inductor, Transformer, Relay and Speaker.

Apparatus Required

S.No.	Apparatus / Components required	Range/Value	Quantity
1	Capacitor	1000 µF/25 V	1
2	Inductor	----	1
3	Transformer	0 – 6 V/ 500 mA	1
4	Relay	12 volts	1
5	Speaker	-----	1

Testing of Capacitor

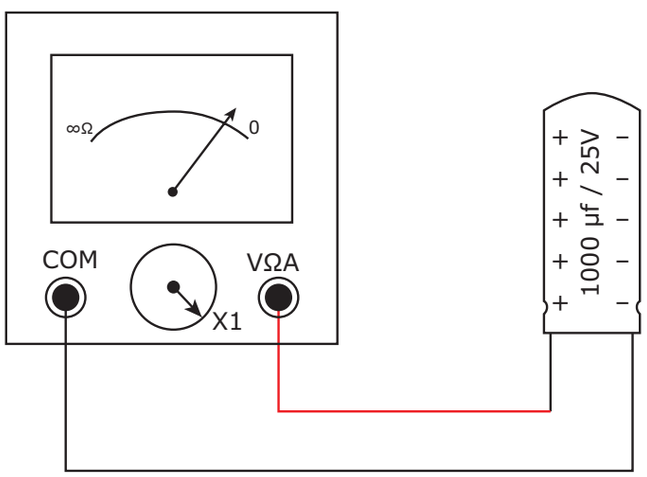


Fig 6.1 Testing of Capacitor

1. Select the multimeter selector switch in the X 1 ohm's range.
2. Connect the red probe with positive terminal of electrolytic capacitor and black probe to negative terminal. Observe the value of meter reading.

EE_Practicals_English Version.indd 248 11/10/2020 12:17:47 PM