3. If the needle of the meter, suddenly move to the right end (ie. Charging of current) and slowly move to the left end, the capacitor is in working condition.
4. If meter reading shows 0 Ω, the capacitor is said to be short.
5. If meter reading shows ∞ Ω, the capacitor is said to be open.
6. If meter reading shows some ohms and the needle remains unmoved at that point, the capacitor is said to be leaky.

Testing of Inductor

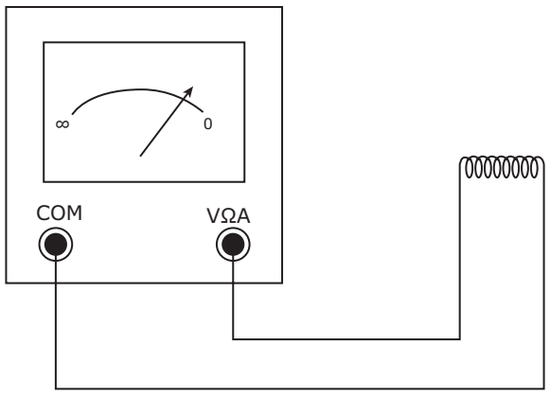


Fig 6.2 Testing of Inductor

1. Select the multimeter in X 1 ohm's range.
2. Connect both probes with both ends of the coil. Observe the value of meter reading.
3. If the needle of the meter shows nearly zero, the coil is said to be in good condition.
4. If the needle of the meter shows ∞ Ω, the coil is said to be open.

Testing of transformer

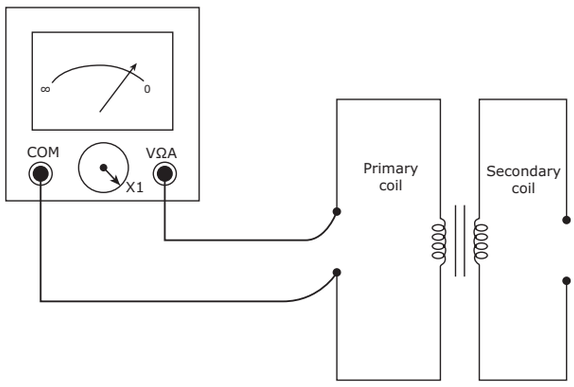


Fig 6.3 Testing of transformer

EE_Practicals_English Version.indd 249 11/10/2020 12:17:47 PM