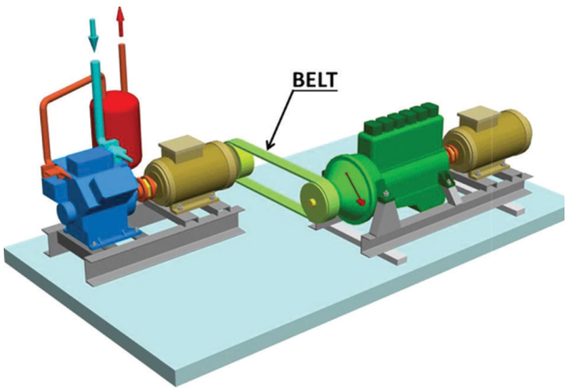


Transmission of Power

9.3 METHODS OF TRANSMITTING POWER

1. Belt drive.
2. Gear drive.
3. Chain drive.
4. Clutch drive.
5. Rope drive.

9.4 BELT DRIVE

Belt drive is one of the common methods of transmitting motion and power from one shaft to another by means of a thin inextensible band running over two pulleys.

In a belt drive arrangement, the shaft which transmits the rotational power is known as the driving shaft. The pulleys mounted on the driving shaft is known as driver (or) driving pulley. The shaft which receives the rotational power is known as driven shaft and the pulley mounted on it is known as follower or driven pulley. The transmission of power becomes possible because of the grip between the pulley and the belt. Belt drive is generally used in mills and factories.


TYPES OF BELT DRIVES

The belt drives are divided into two types.


1. Openbelt drive.
   a) Simple belt drive
   b) Compound belt drive
2. Crossed belt drive.

OPEN BELT DRIVE

In this type of belt drive the belt is not crossed. The belt connects the top portions of the pulleys directly. The grip between the belt and the pulley is minimum. The driver and the follower rotate in the same direction.

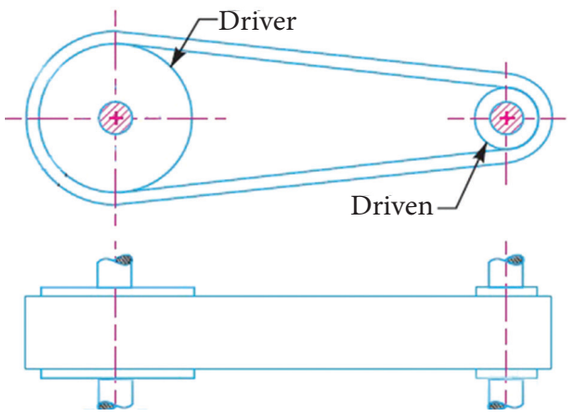

Simple Belt Drive

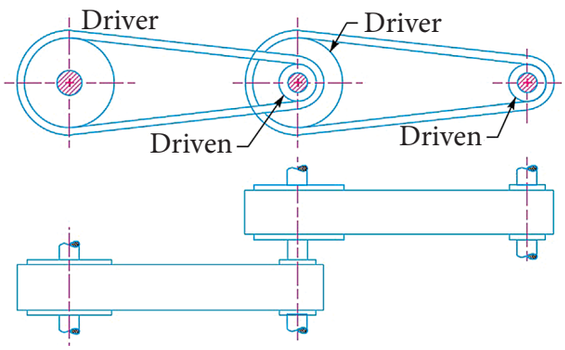

Compound Belt Drive

GM_Chp09.indd 113 14-02-2019 11:43:52