protective elements like "no volt coil" and "over load relays."

Different Types of Starters for Induction Motors


There are different types of starters used for induction motor.

1. Direct-on-line starter (D.O.L)
2. Star-delta starter
3. Auto transformer starter
4. Rotor resistance starter(for slip ring motor)

Direct-on-Line (D.O.L) Starter

It is simple in construction when compared with other starters. It permits the motor to start up with full voltage on. It has protective elements to safeguard the motors against over loading and single-phasing. Single-phasing means operation of motor with one line cut of accidentally. When the start button is pressed, the "no volt coil circuit" energises. The contacts are pressed against spring tension to connect motor terminals to three-phase supply. The motor starts running.

Even if the pressing of 'start' button is stopped, the circuit is closed through the fourth conductor and the

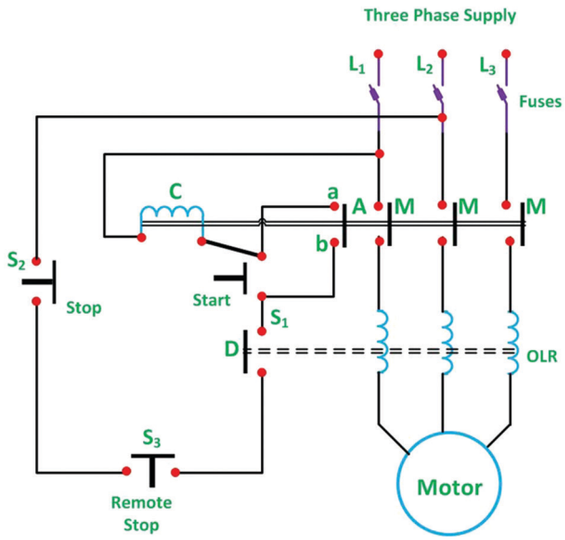

Direct-on-Line (D.O.L) Starter

motor continues to run. When the motor is overloaded, the temperature of the heating elements becomes high to heat the bimetallic strip. This makes overload relay (OLR) to press a lever to open the no volt coil for a moment to switch off the supply to stop the motor.

If the "off" button is pressed, the supply to the no volt coil is disconnected and the motor is stopped. Direct-on-line starters are used for motors with capacity up to 5 hp.

Star-Selta Starter

This starter has two positions 'start' and 'run'. When the handle is pressed





Michael Faraday was an English scientist who contributed to the study of electromagnetism and electrochemistry. His main discoveries include the principles underlying electromagnetic induction, diamagnetism and electrolysis.

GM_Chp10.indd 137 14-02-2019 11:46:22