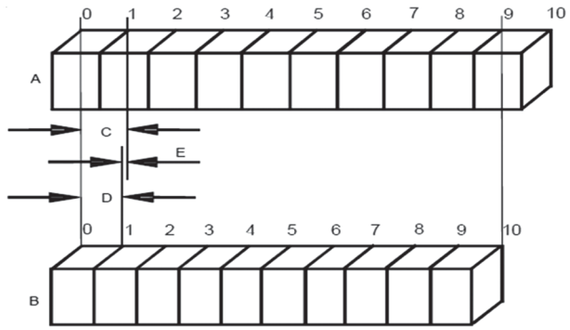


Least Count of Vernier Caliper

Least count: The smallest value that can be measured by the measuring instrument is called least count.

Finding the Least Count of Vernier Caliper

Formula

Least Count of
Vernier Caliper = 1 M.S.D – 1 VSD

(MSD – Main Scale Division, VSD – Vernier Scale Division.)

Problem

The main Scale of Vernier Caliper is marked in Millimeters. 49 divisions of main scale are divided as 50 divisions in Vernier Scale. What is the least Count of that Vernier Caliper?

Value of one division in Main Scale $= 1mm$

Value of one division in Vernier Scale $= \frac{49}{50}$ mm

Formula

$$Least\ \text{Count} = 1\ MSD - 1\ VSD$$


$$= \frac{1 - 49}{50}$$

$$= \frac{50 - 49}{50}$$

$$= \frac{1}{50}$$

Least Count of
Vernier Caliper = 0.02 *mm*

Activity: Find the measurement of Vernier Caliper as shown in figure

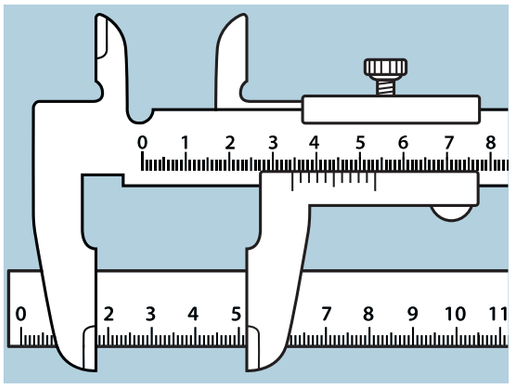

DO YOU KNOW?

Pierre Vernier



Pierre Vernier was a French mathematician and instrument inventor. He was inventor and eponym of the vernier scale used in measuring devices. Born: 19 August 1580.

VERNIER HEIGHT GAUGE

Vernier Height Gauge is used to find the height of an object and to draw lines to desired heights accurately. Measurements can be done to an accuracy of 0.02 mm and 0.01 inch.

The base of Vernier height gauge is made up of steel. It is machined accurately.

GM_Chp03.indd 38 14-02-2019 11:33:16