Aim

To study and test the conductivity of the components of Resistor, Diode, Transistor and Capacitor.


Apparatus Required

Sl.No	Description	Quantity	Typical Value
1	Resistors	5	1kΩ, 2kΩ, 3kΩ, 4kΩ, 5kΩ
2	Diodes	2	1N4007, 1N4002
3	Capacitor	2	1mFD, 2mFD
4	Transistors-NPN	2	BC107, BC108
5	Transistors-PNP	2	

Testing of Resistor

Objective

To learn the resistor code and identify the value of given resistors.

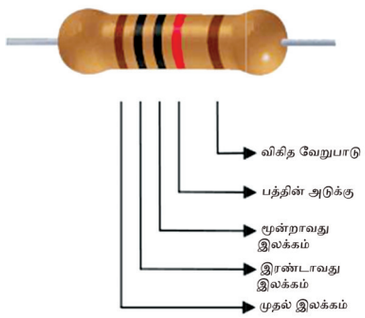

Consider the following diagram for the better understanding of finding the resistor values. The first band indicates the first digit, second band is for the second digit and the third band indicates the multiplier. The numerical value corresponding to the colour bands are shown below. If the first colour band is brown and the second band is black then the first two digits are 10. If the multiplier colour is red (value in 2) then two numbers of zeros added with first two digit.

Tolerance value of Gold = ±5%

Tolerance value of Silver = ±10%



EMA_English_Practical.indd 231 11/9/2020 3:56:18 PM