
	Ist Digit	2nd Digit	Multiplier	Code	Resistance
Colour	brown	Black	2		
Value	1	0	00	1000	1kΩ

Likewise, the other types of resistors as four band, five band and sixbands. The tolerance is fixed from these bands.(fig)

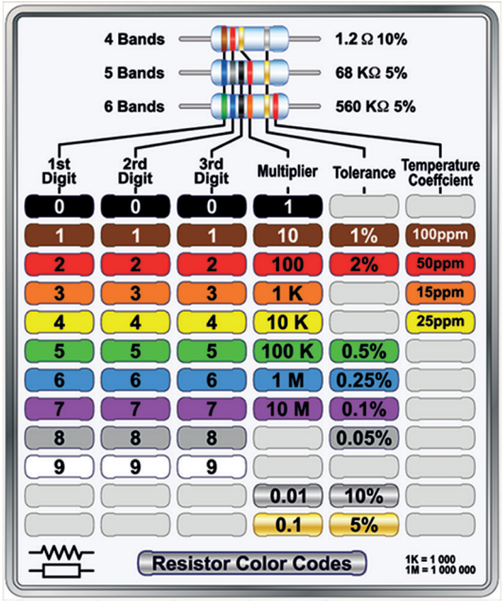

Testing of Diode

Objective

To test the diode for its forward (conduction) and reverse mode(non-conduction) of operation.

Description

It is well known that the diodes are unidirectional devices which allow current in one direction. These are expected to offer very low resistance for the flow of current under forward biased condition and a very high resistance under reverse biased condition. In other words, one can undertake diode testing by measuring the resistance across its terminals by using an equipment like multimeter.

A diode is forward-biased when the positive (red) test lead is on the anode and the negative (black) test lead is on the cathode.

A diode is reverse-biased when the positive (red) test lead is on the cathode and the negative (black) test lead is on the anode.

EMA_English_Practical.indd 232 11/9/2020 3:56:19 PM