Step 4. Connect the positive terminal of the diode to cathode and the negative terminal to the Anode.

Under this condition the resistance of the diode is very high which means open circuit is expected.



1N4001 diode

Testing of Transistor

Objective

Transistors:


The bi-polar junction transistor (BJT)transistor has three terminals. They are

1. Emitter(E)
2. Base(B)
3. Collector(C)



To identify the above three terminals, keep the flat surface of transistor facing towards the face of you and mark 1.2 and 3 from left side onwards.

The schematic diagram of BJT is shown below.

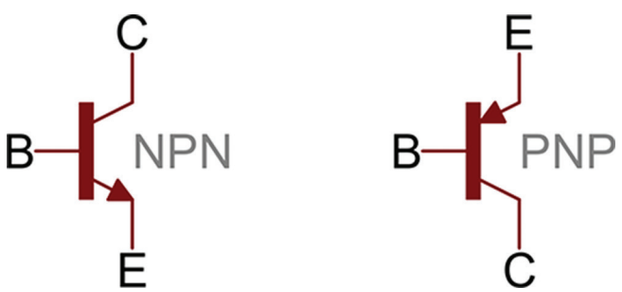

EMA_English_Practical.indd 234 11/9/2020 3:56:20 PM