Table 1.1 Action of forces

Action of forces	Diagram	Resultant force (F_{net})
Parallel forces are acting in the same direction	F_1 → F_2 →	$F_{net} = F_1 + F_2$
Parallel unequal forces are acting in opposite directions	F_1 → ← F_2	$F_{net} = F_1 - F_2$ (if $F_1 > F_2$) $F_{net} = F_2 - F_1$ (if $F_2 > F_1$) F_{net} is directed along the greater force.
Parallel equal forces are acting in opposite directions in the same line of action ($F_1 = F_2$)	F_1 → ← F_2	$F_{net} = F_1 - F_2$ $F_{net} = 0$ since ($F_1 = F_2$)



(a) Unlike parallel forces – Tug of war

(b) Unbalanced forces - Action of a lever

(c) Like parallel forces

Figure 1.2 Combined effect of forces

If the resultant force of all the forces acting on a body is equal to zero, then the body will be in equilibrium. Such forces are called **balanced forces**. If the resultant force is not equal to zero, then it causes the motion of the body due to **unbalanced forces**

Examples: Drawing water from a well, force applied with a crow bar, forces on a weight balance, etc.

A system can be brought to equilibrium by applying another force, which is equal to the resultant force in magnitude, but opposite in direction. Such force is called as '**Equilibrant**'.

1.4.5 Rotating Effect of Force

Have you observed the position of the handle in a door? It is always placed at the edge of door and not at some other place. Why? Have you tried to push a door by placing your hand closer to the hinges or the fixed edge? What do you observe?

The door can be easily opened or closed when you apply the force at a point far away from the fixed edge. In this case, the effect of the force you apply is to turn the door about the fixed edge. This turning effect of the applied force is more when the distance between the fixed edge and the point of application of force is more.

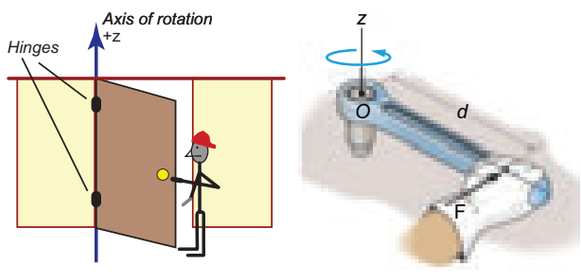


Figure 1.3 Rotating effect of a force

The axis of the fixed edge about which the door is rotated is called as the '*axis of rotation*'. Fix one end of a rod to the floor/wall, and apply a force at the other end tangentially.

10th_Science_Unit-1.indd 4 11-01-2020 11:52:11