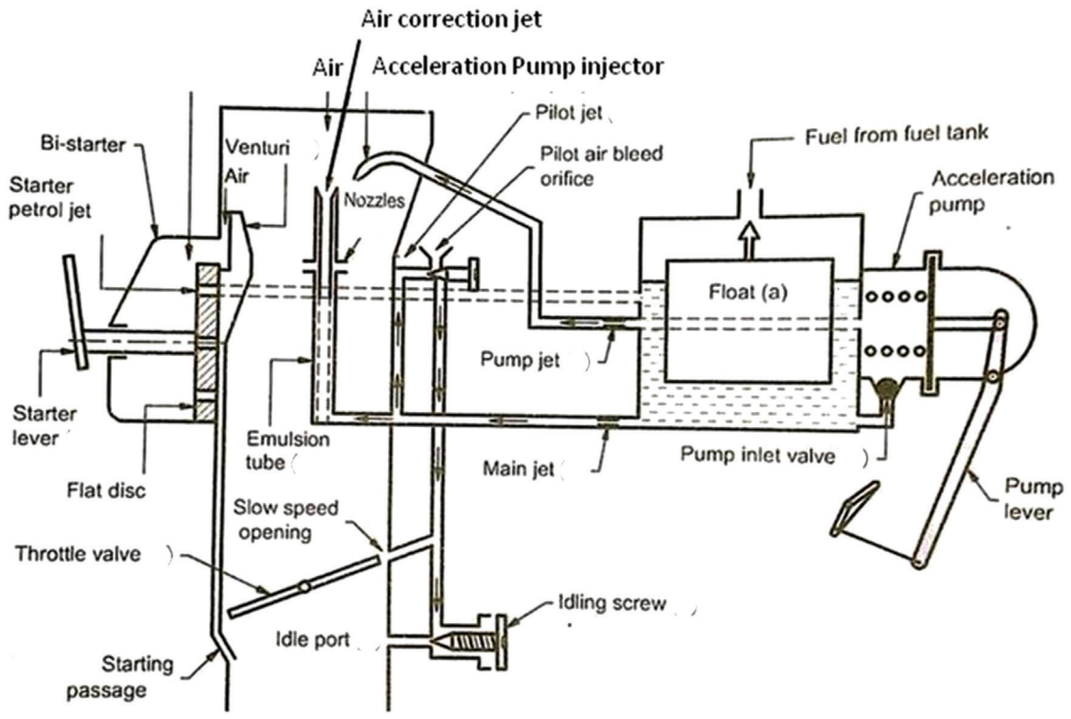


Figure 9.5.5 Schematic view of the Solex Carburettor

engine combustion chamber. The schematic view of the Solex carburettor can be seen in Fig. 9.5.5.

This carburetor has different additional circuits to be present for the complete operation of the engine. The important circuits are

1. Float circuit
2. Starting circuit
3. Idling and low speed circuit
4. Normal running circuit
5. Accelerating pump circuit

1) **Float circuit:** Float circuit is used for balancing or maintaining the fuel level uniformly in the carburetor with the help of needle valve placed above on the float. When the float moves down, the fuel (petrol) from the fuel tank automatically enters into the float chamber. If the petrol fuel level is increased inside the chamber then the float moves upward and the needle valve closes the fuel flow inlet path. By this way the float circuit maintains the petrol fuel level uniformly. Fig 9.5.5(a) shows the float circuit.

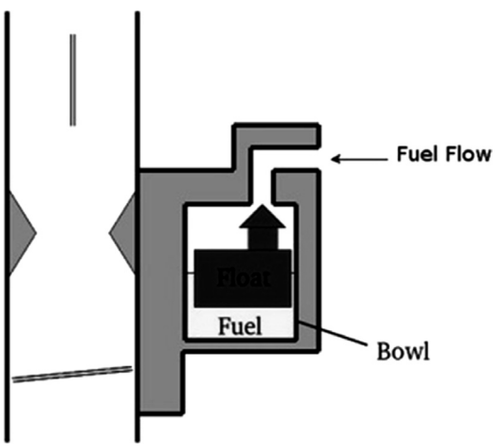


Fig.9.5.5(a) Float Circuit

2) **Starting circuit:** The bi-starter valve adapted in this circuit is actuated by using starter lever. It consists of two different sized holes.

AM_Unit_09.indd 183 31-01-2019 18:02:29