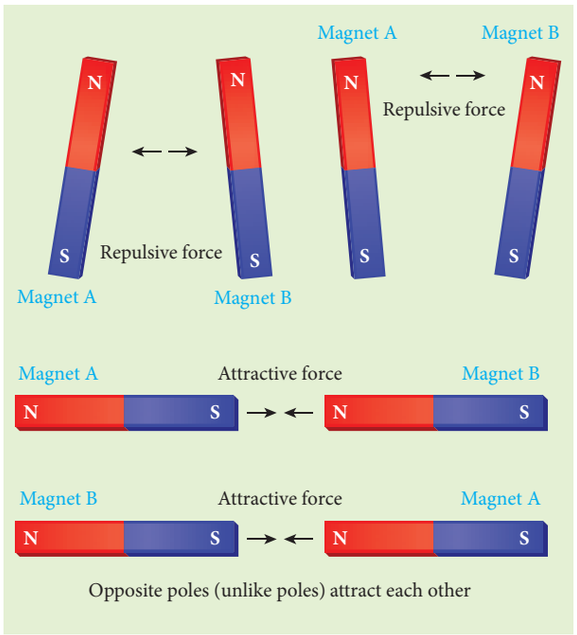


Figure 3.11: Magnetic poles behave like electric charges – like poles repel and unlike poles attract

The force of attraction or repulsion between two magnetic poles is directly proportional to the product of their pole strengths and inversely proportional to the square of the distance between them.

Mathematically, we can write

$$\vec{F} \propto \frac{q_{m_A} q_{m_B}}{r^2} \hat{r}$$

where q_{m_A} and q_{m_B} are pole strengths of two poles and r is the distance between two magnetic poles.

$$\vec{F} = k \frac{q_{m_A} q_{m_B}}{r^2} \hat{r} \qquad (3.7)$$

In magnitude, $F = k \dfrac{q_{m_A} q_{m_B}}{r^2}$ (3.8)

where k is a proportionality constant whose value depends on the surrounding medium. In SI unit, the value of k for free space is $k = \dfrac{\mu_\circ}{4\pi} \approx 10^{-7}\,\text{H m}^{-1}$, where μ_o is the absolute permeability of free space (air or vacuum) and H stands for henry.

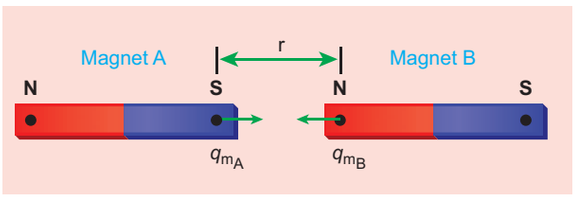


Figure 3.12 Coulomb's law – force between two magnetic poles

EXAMPLE 3.5

The repulsive force between two magnetic poles in air is 9×10^{-3} N. If the two poles are equal in strength and are separated by a distance of 10 cm, calculate the pole strength of each pole.

***Solution*:**

The magnitude of the force between two poles is given by

$$F = k \frac{q_{m_A} q_{m_B}}{r^2}$$

Given: $F = 9 \times 10^{-3}\text{N}, r = 10\,\text{cm} = 10 \times 10^{-2}\,\text{m}$

Since $q_{m_A} = q_{m_B} = q_m$, we have

$$9 \times 10^{-3} = 10^{-7} \times \frac{q_m^2}{\left(10 \times 10^{-2}\right)^2} \Rightarrow q_m = 30\,\text{NT}^{-1}$$

3.2.1 Magnetic field at a point along the axial line of the magnetic dipole (bar magnet)

Consider a bar magnet NS as shown in Figure 3.13. Let N be the north pole and S be the south pole of the bar magnet, each of pole strength q_m and are separated by a distance of $2l$. The magnetic field at a point C (lies along the axis of the magnet)

UNIT-3(XII-Physics_Vol-1).indd 135 14-02-2020 20:02:54