## 3.8 BIOT - SAVART LAW

Soon after Oersted's discovery, both Jean-Baptiste Biot and Felix Savart in 1819 did quantitative experiments on the force experienced by a magnet kept near current carrying wire and arrived at a mathematical expression that gives the magnetic field at some point in space in terms of the current that produces the magnetic field. This is true for any shape of the conductor.

### 3.8.1 Definition and explanation of Biot- Savart law

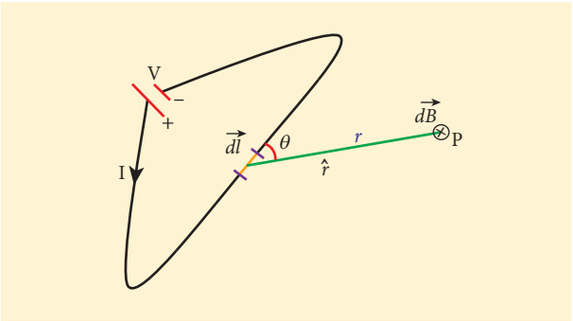



**Figure 3.30** Magnetic field at a point P due to current carrying conductor

Biot and Savart experimentally observed that the magnitude of magnetic field $d\vec{B}$ at a point P (Figure 3.30) at a distance $r$ from the small elemental length taken on a conductor carrying current varies

(i) directly as the strength of the current $I$

(ii) directly as the magnitude of the length element $d\vec{l}$

(iii) directly as the sine of the angle $\theta$ between $d\vec{l}$ and $\hat{r}$.

(iv) inversely as the square of the distance $r$ between the point P and length element $d\vec{l}$.

This is expressed as

$$dB \propto \frac{Idl}{r^2}\sin\theta$$

$$dB = k\frac{I\,dl}{r^2}\sin\theta$$

where $k = \frac{\mu_\circ}{4\pi}$ in SI units.

In vector notation,

$$d\vec{B} = \frac{\mu_\circ}{4\pi}\frac{I\,d\vec{l}\times\hat{r}}{r^2} \qquad (3.34)$$

Here vector $d\vec{B}$ is perpendicular to both $Id\vec{l}$ (pointing the direction of current flow) and the unit vector $\hat{r}$ directed from $d\vec{l}$ toward point P (Figure 3.31).

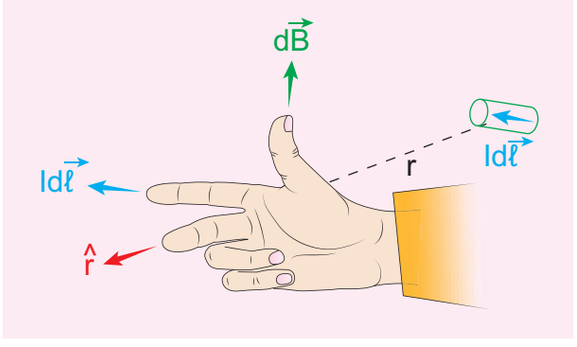



**Figure 3.31** The direction of magnetic field using right hand rule

The equation (3.34) is used to compute the magnetic field only due to a small elemental length $dl$ of the conductor. The net magnetic field at P due to the conductor is obtained from principle of superposition by considering the contribution from all current elements $I\,d\vec{l}$. Hence integrating equation (3.34), we get



UNIT-3(XII-Physics_Vol-1).indd 154 14-02-2020 20:03:32