
the following question, "when the time varying magnetic field produces an electric field, why not the time varying electric field produce a magnetic field?"

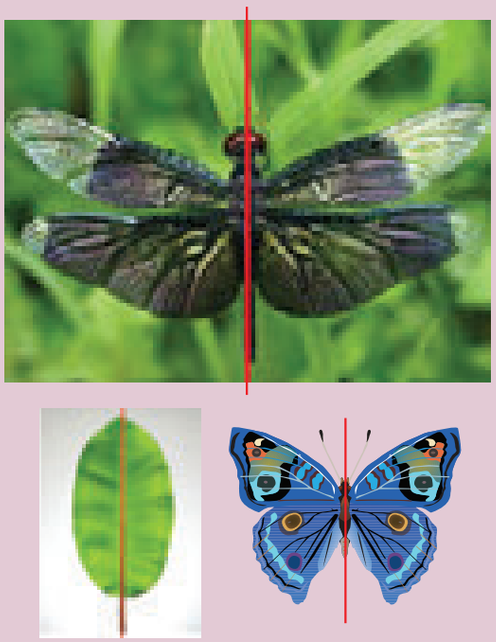

Symmetry in nature

Later he proved that it is indeed true. In 1888, H. Hertz experimentally verified Maxwell's prediction and hence, this understanding resulted in new technological invention, especially in wireless communication, LASER (Light Amplification by Stimulated Emission of Radiation) technology, RADAR (Radio Detection And Ranging) etc.

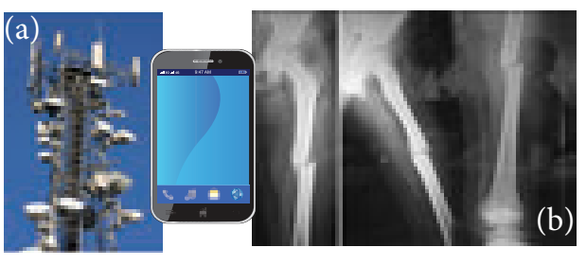


Figure 5.2 (a) Cell phone tower and cell phone (b) X-ray radiograph

In today's digital world, cell phones (Figure 5.2 (a)) have greater influence in our day to day life. It is a faster and more effective mode of transferring information from one place to another. It works on the basis that light is an electromagnetic wave. In hospitals, the location of bone fracture can be detected using X-rays as shown in Figure 5.2 (b), which is also an electromagnetic wave. For cooking microwave oven is used. The microwave is also an electromagnetic wave. There are plenty of applications of electromagnetic waves in engineering, medicine (example LASER surgery, etc), defence (example, RADAR signals) and also in fundamental scientific research. In this unit, basics of electromagnetic waves are discussed.

5.1.1 Displacement current and Maxwell's correction to Ampere's circuital law

Induced magnetic field

Faraday's law of electromagnetic induction states that the change in magnetic field produces an electric field. Mathematically, it is written as

$$\underbrace{\oint_l \vec{E}\cdot d\vec{l}}_{\text{Electric field induced along a closed loop}} = \underbrace{-\frac{d}{dt}\Phi_B}_{\text{Variation of magnetic flux with time}} = \underbrace{-\frac{d}{dt}\oint_S \vec{B}\cdot d\vec{A}}_{\text{Changing magnetic flux } \Phi_B \text{ in the region enclosed by the loop}} \quad (5.1)$$

where Φ_B is the magnetic flux and $\frac{d}{dt}$ is the total derivative with respect to time. Equation (5.1) means that the electric field $\vec{E}$ is induced along a closed loop by the changing magnetic flux Φ_B in the region encircled by the loop.

UNIT-5(XII-Physics_Vol-1).indd 267 14-02-2020 20:11:15