
EXAMPLE 2.5

A potential difference across 24 Ω resistor is 12 V. What is the current through the resistor?

Solution

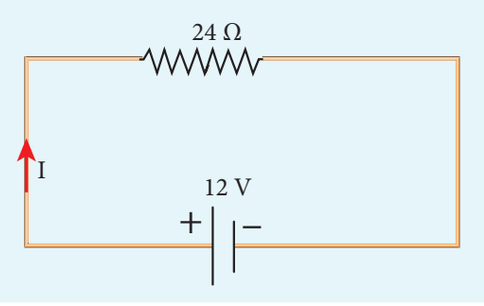

$V = 12$ V and $R = 24\ \Omega$

Current, $I = ?$

From Ohm's law, $I = \frac{V}{R} = \frac{12}{24} = 0.5\,\text{A}$

2.2.1 Resistivity

In the previous section, we have seen that the resistance R of any conductor is given by

$$R = \frac{l}{\sigma A} \qquad (2.18)$$

where σ is called the conductivity of the material and it depends only on the type of the material used and not on its dimension.

The resistivity of a material is equal to the reciprocal of its conductivity.

$$\rho = \frac{1}{\sigma} \qquad (2.19)$$

Now we can rewrite equation (2.18) using equation (2.19)

$$R = \rho\frac{l}{A} \qquad (2.20)$$

The resistance of a material is directly proportional to the length of the conductor and inversely proportional to the area of cross section of the conductor. The proportionality constant ρ is called the resistivity of the material.

If $l = 1$ m and $A = 1$ m^2, then the resistance $R = \rho$. In other words, the **electrical resistivity of a material is defined as the resistance offered to current flow by a conductor of unit length having unit area of cross section.** The SI unit of ρ is ohm-metre (Ω m). Based on the resistivity, materials are classified as conductors, insulators and semiconductors. The conductors have lowest resistivity, insulators have highest resistivity and semiconductors have resistivity greater than conductors but less than insulators. The typical resistivity values of some conductors, insulators and semiconductors are given in the Table 2.1

Table 2.1 Resistivity for various materials

Material	Resistivity, ρ (Ω m) at 20^{0}C
Insulators	
Pure Water	2.5×10^5
Glass	$10^{10} - 10^{14}$
Hard Rubber	$10^{13} - 10^{16}$
NaCl	10^{14}
Fused Quartz	10^{16}
Semiconductors	
Germanium	0.46
Silicon	640
Conductors	
Silver	1.6×10^{-8}
Copper	1.7×10^{-8}
Aluminium	2.7×10^{-8}
Tungsten	5.6×10^{-8}
Iron	10×10^{-8}

UNIT-2(XII-Physics_Vol-1).indd 88 14-02-2020 19:36:50