


Fig. 6.12 Megger

6.9 Tong Tester

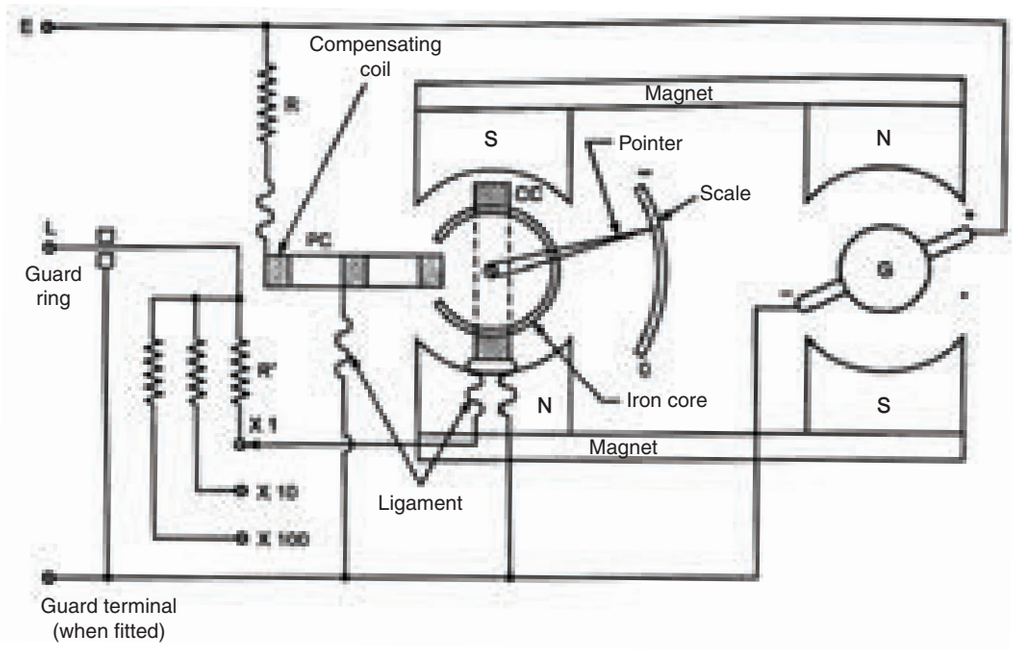

A tong tester is shown in figure 6.13. Ammeters cannot be used directly to measure the current flowing through lines. Because, to connect the ammeter along the path of the current, the line has to be opened at that point and then the ammeter has to be connected in series in the line. Once the testing is over the line has to be rewired. This is not an efficient or feasible method.

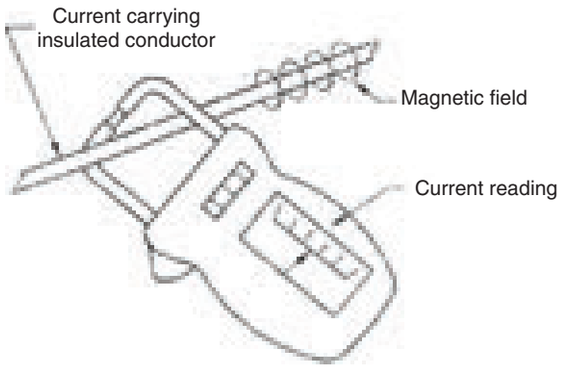


Fig. 6.13 Tong tester

Tong tester is helpful in measuring the alternating current without interrupting the circuit. It consists of a current transformer in its jaw, usually a bar CT. When the instrument is clamped on a conductor,

BEE_ENG_Chapter_06.indd 97 12/27/2019 10:30:46 AM