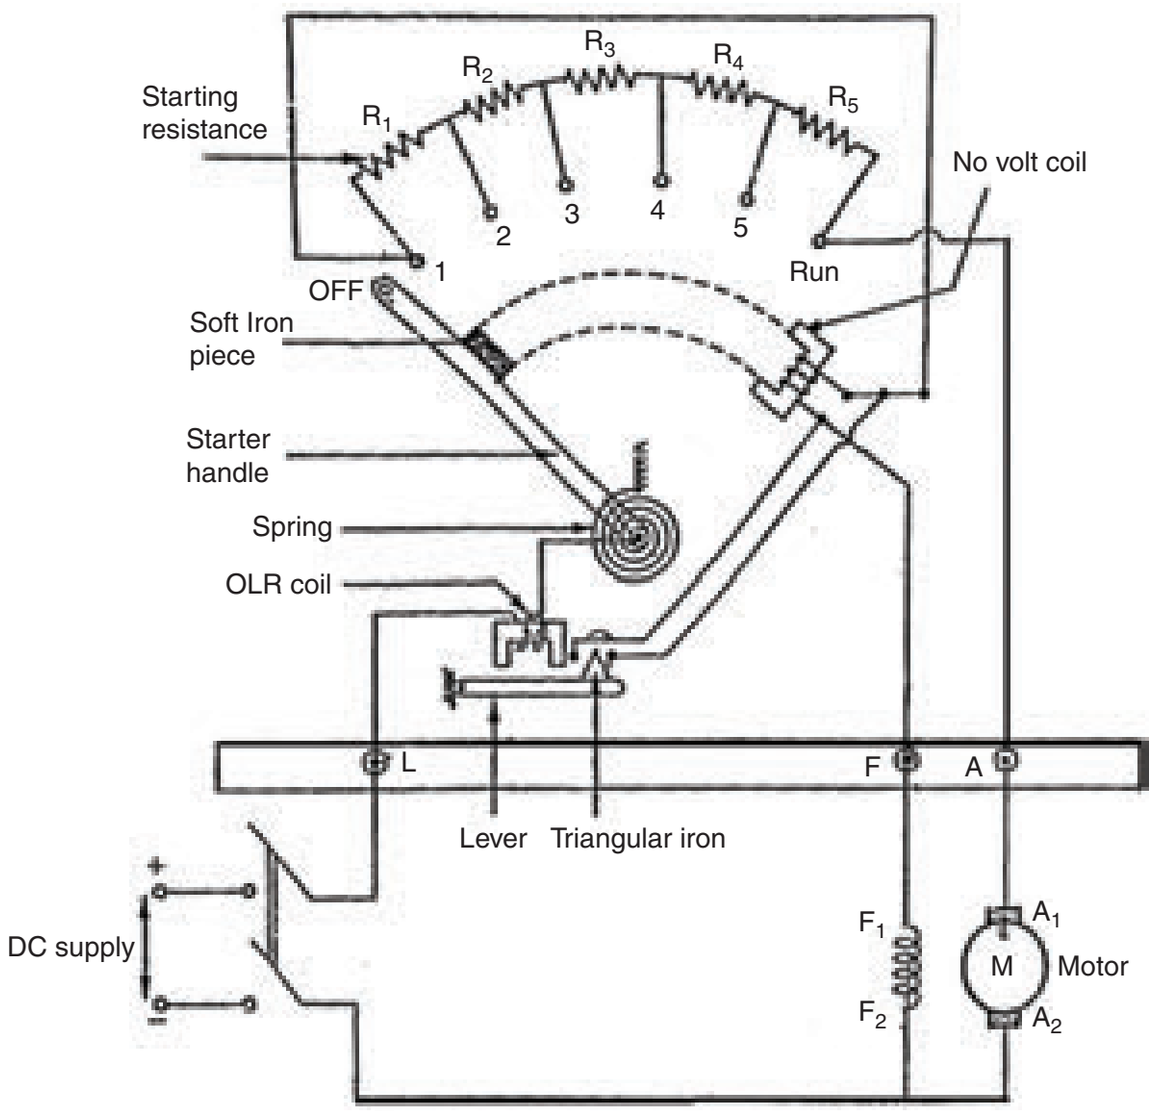


Fig. 8.1 Three point starter

the shunt field is reduced. The field current may become very low because of the addition of high resistance to obtain a high speed. A very low field current will make the holding electromagnet too weak to overcome the force exerted by the spring. The holding magnet may release the arm of the starter during the normal operation of the motor and thus, disconnecting the motor from the line. This is not a desirable action.

Hence, to overcome this difficulty, a four point starter is used.

8.2.4 Four point starter

The four point starter is used for starting shunt and compound motors. The diagram of four point starter is shown in figure 8.2.

The four point starter, the four terminals L+, L-, A and F (Line +, Line-, armature and field) are available.

BEE_ENG_Chapter_08.indd 120 12/27/2019 10:59:53 AM