
2. Inter pole winding
3. Armature winding

Measurement of IR value of field winding

i. Connect one terminal of the megger with anyone terminal of the field winding and another terminal with the body of the motor.
ii. Rotate the megger handle and find IR value.
iii. If the IR value is the less than 1 mega ohm, separate the end connections of the field winding and carry out the test for each pole winding, to identify the defaulted pole winding.
iv. Remove the faulted winding and rewind it.

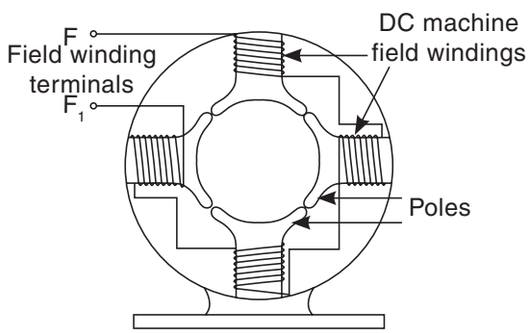

Measurement of IR value of inter pole winding

i. Connect one terminal of the megger with one terminal of the inter pole winding and the other terminal with the body of the motor.
ii. Rotate the handle of the megger and find IR value.
iii. If the IR value is the less than 1 mega ohm, separate the end connections of the inter pole winding and carry out the test for each inter pole winding to identify the defaulted inter pole winding.
iv. Remove the faulted winding and rewind it.

Measurement of IR value of armature winding

i. Connect one terminal of the megger with anyone commutator segment and another lead with the shaft or body of the machine.
ii. Rotate the handle of the megger and find the value of IR.
iii. If the IR value is less than 1 mega ohm, rewind it.


Measurement of IR value of AC 1 Φ capacitor type motor windings

There are two types of windings in the AC 1Ø capacitor type of motor. They are,

1. Starting winding
2. Running winding

Measurement of IR value

Before conducting the test, the terminal of the starting winding should be splited separately from the terminal box connections.

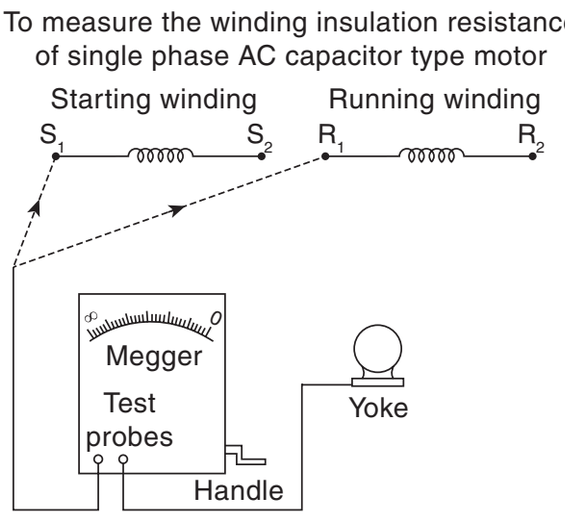

BEE_ENG_Pratical.indd 199 12/27/2019 10:54:36 AM