i. Two terminals of the megger is connected between the starting winding and the body of the motor.
ii. Rotate the megger handle and note the reading.
iii. Similarly conduct the same test for the running winding and note the reading.
iv. Also conduct the test between the starting and running winding with megger and note the reading.
v. All the readings should not be less than1 mega ohm. if it is less, rewind it.

Measurement of IR value of three phase motor windings

In three phase motors, there are three windings namely R,Y and B. So the IR value of the three windings and the IR value between the windings should be measured by the megger.

Before conducting the test, the terminals of three windings should be splited and test if there is any star or delta connections made in the terminal box.

Measurement of IR value between windings and body

i. Two terminals of the megger is connected between phase winding and the body.
ii. Rotate the handle of the megger and note the reading.
iii. Continue the test for the remaining phases and note the readings.
iv. All the readings should not be below 1 mega ohm. If it is less, rewind it.


Measurement of IR value between windings

i. Two terminals of the megger is connected with 'R' and 'Y' phase.
ii. Rotate the handle of the megger and note the reading.
iii. Similarly conduct the tests for (Y and B) and (B and R), and note the readings.
iv. All the readings must be more than 1 mega ohm. If it is low, rewind it.

Result

Thus the IR value of the given motor winding is measured by using the megger.

To measure insulation resistance between winding and body of a phase motor

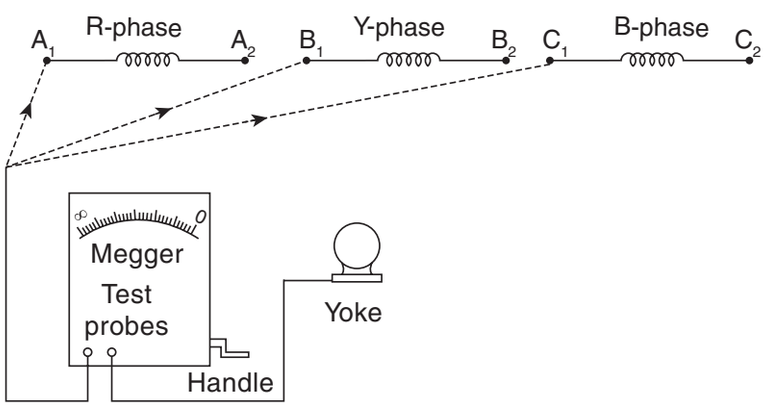

BEE_ENG_Pratical.indd 200 12/27/2019 10:54:36 AM