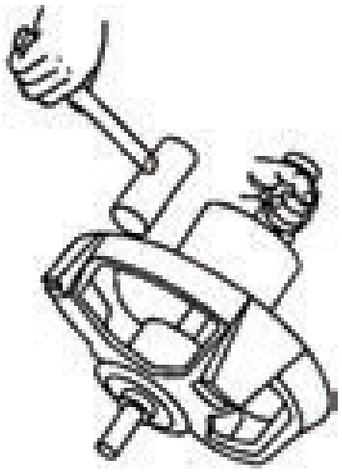


Remove the other end shield cover also by gently priming it out.

Inspect the condition of the rotor and bearing that it contains any defects in it.

If the bearing is worn out, replace it with a new one. All fitting devices should be kept in a separate tray.

Dismantling the parts areas shown below.

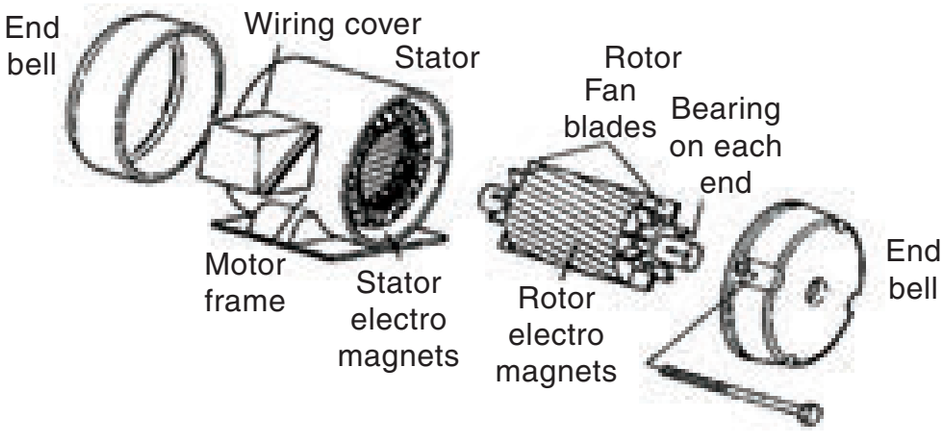


Table 1

Sl. No.	Insulation resistance	Insulation resistance value
1.	Between core and R phase	
2.	Between core and Y phase	
3.	Between core and B phase	

Measure the insulation resistance value between a winding and the stator core with a 500V Megger and record it in table 1, and the value of insulation resistance should be more than 1 MΩ

Table 2

Sl. No.	Insulation resistance	Insulation resistance value
1.	Between R phase and Y phase	
2.	Between Y phase and B phase	
3.	Between B phase and R phase	

BEE_ENG_Pratical.indd 203 12/27/2019 10:54:36 AM