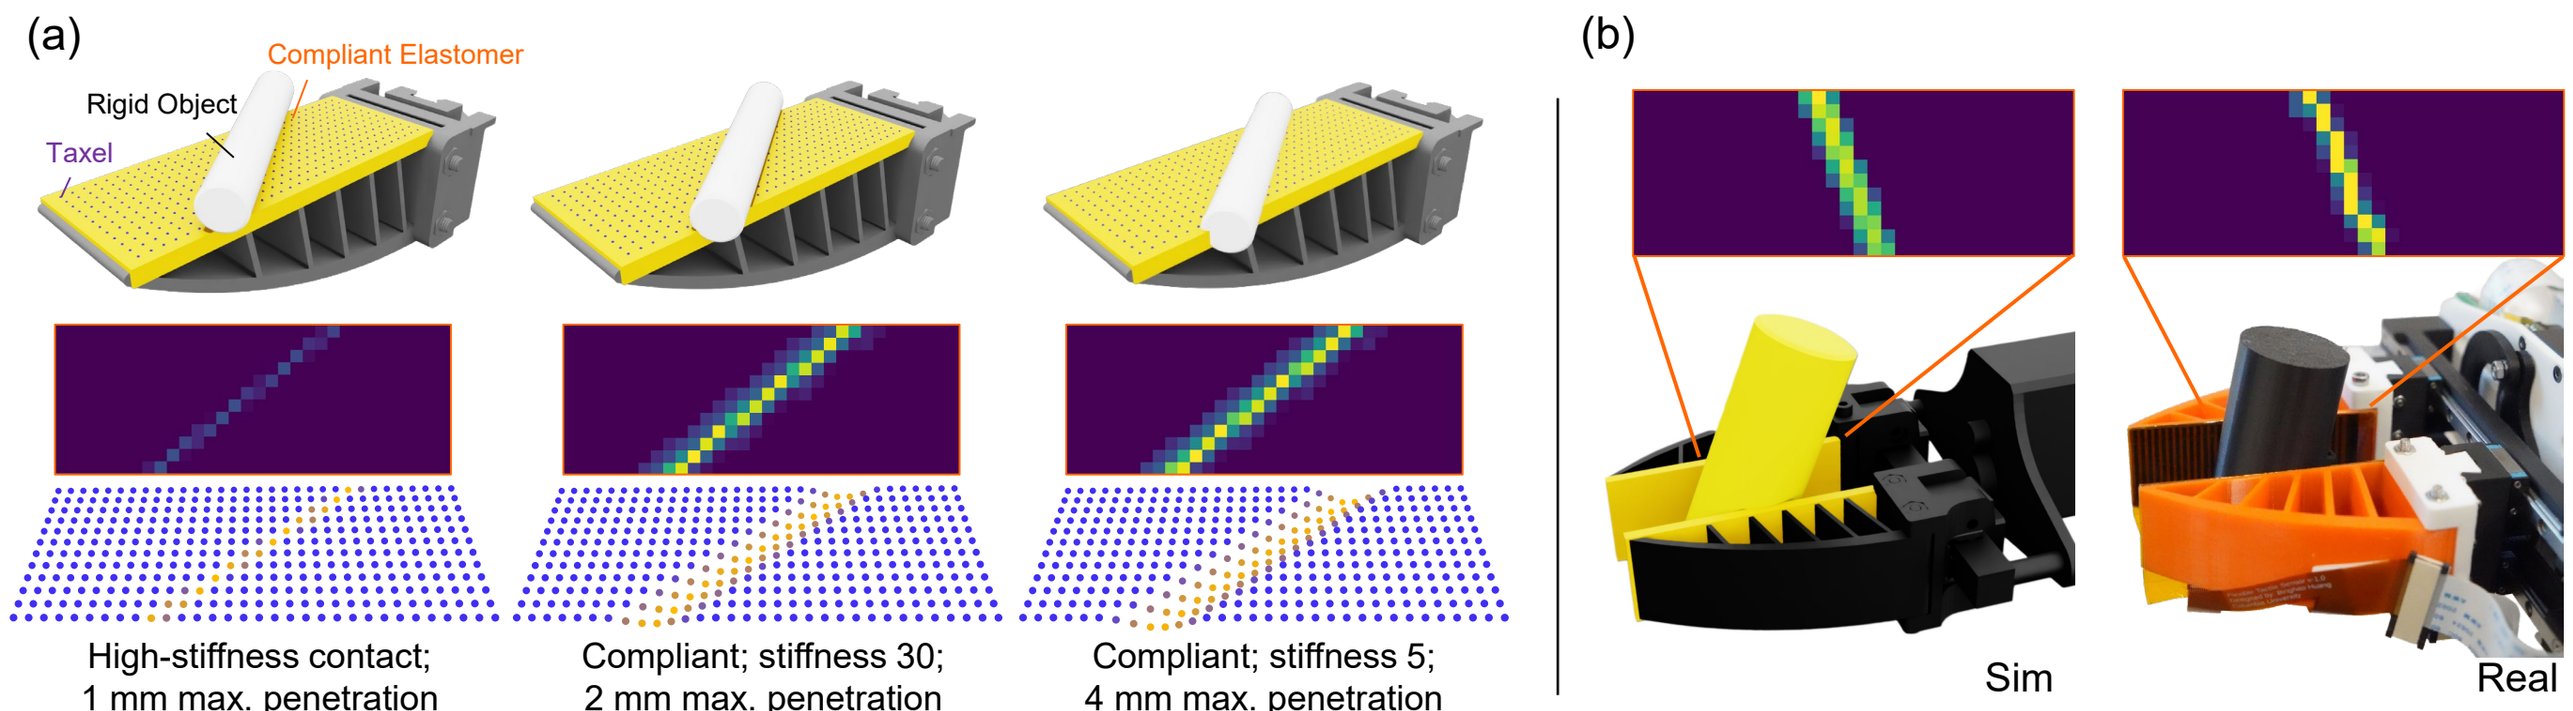

(a)
Compliant Elastomer
Rigid Object
Taxel
High-stiffness contact;
1 mm max. penetration
Compliant; stiffness 30;
2 mm max. penetration
Compliant; stiffness 5;
4 mm max. penetration
(b)
Sim
Real