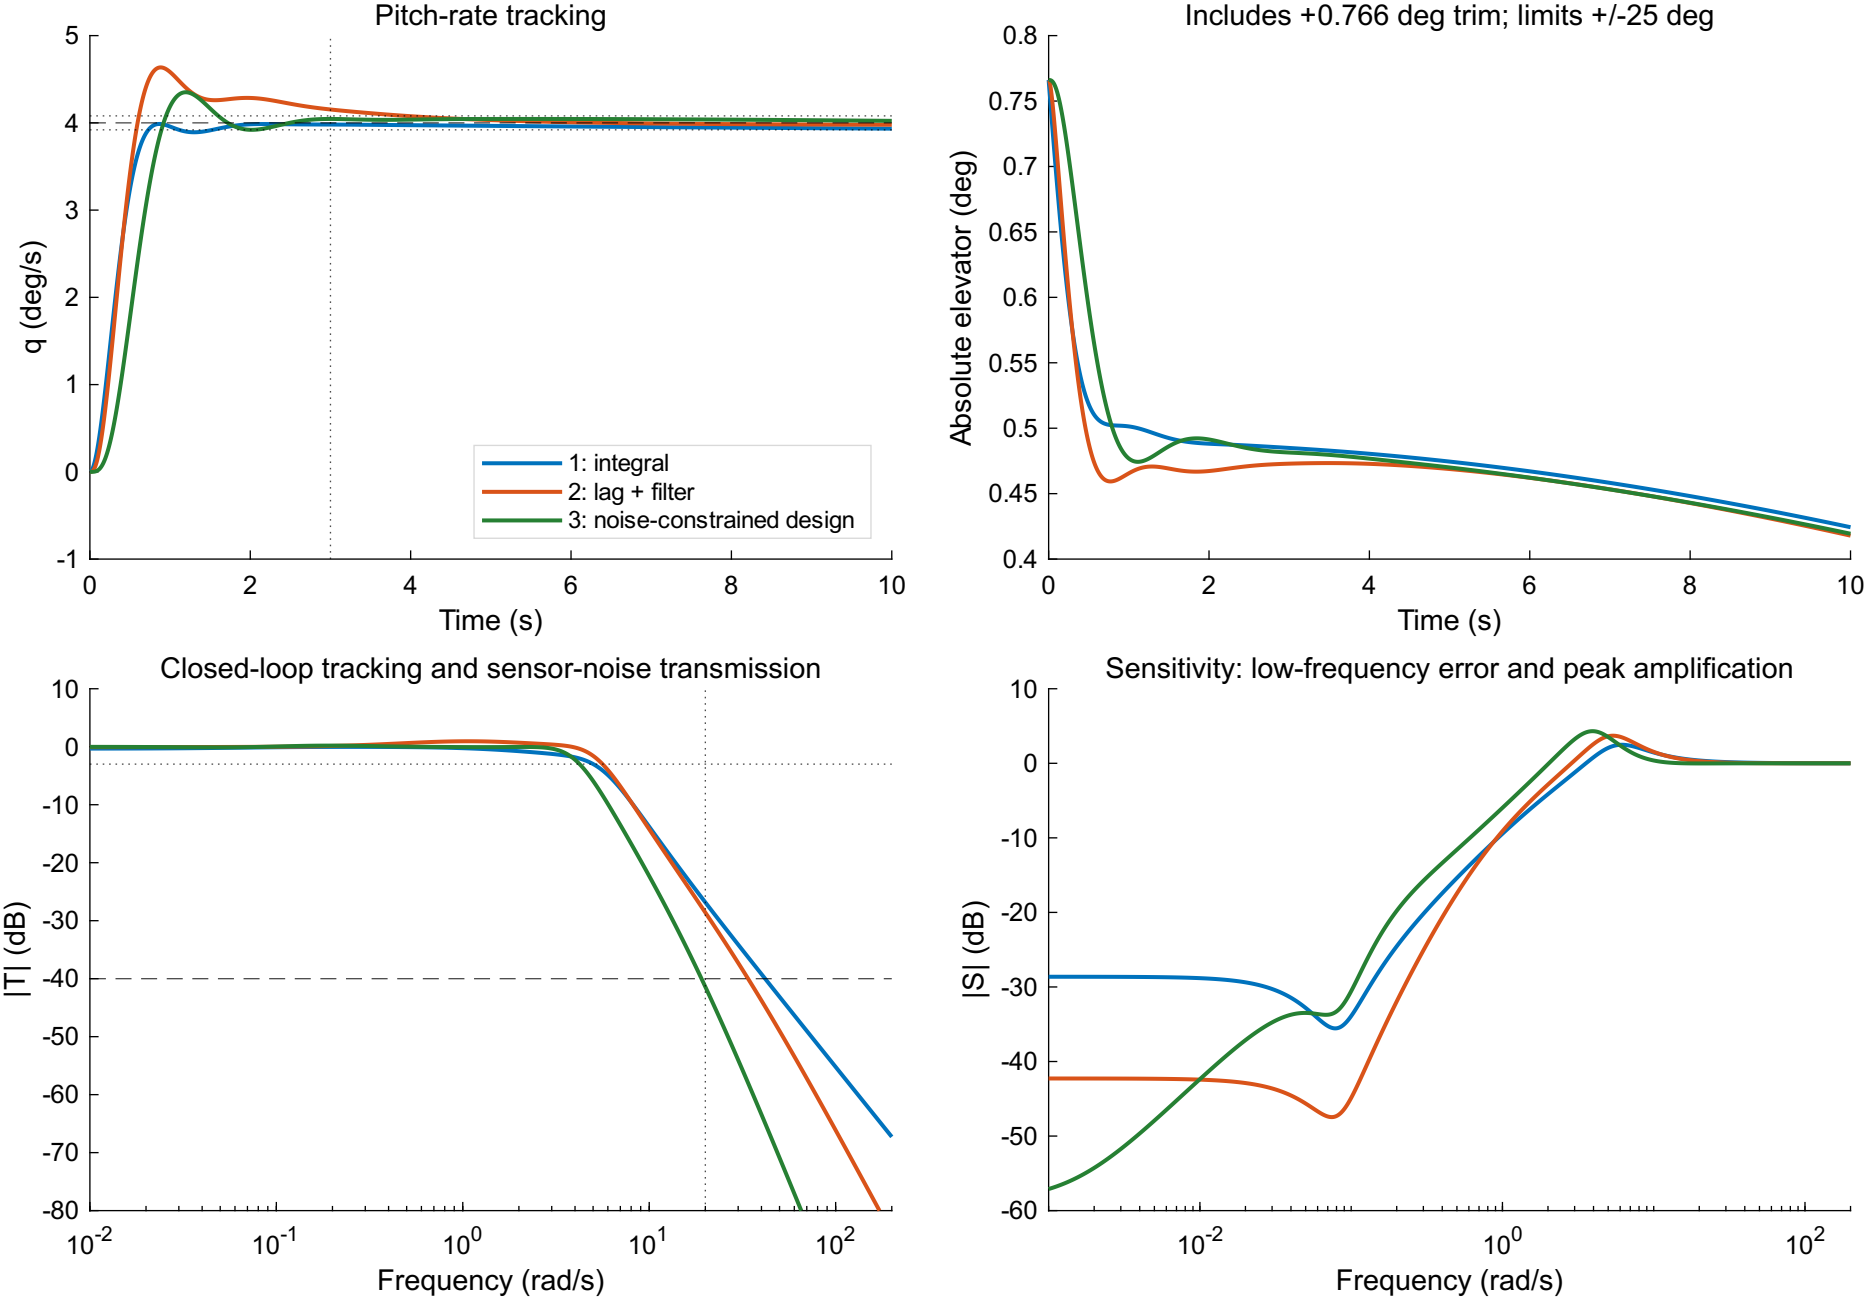

Pitch-rate tracking
q (deg/s)
Time (s)
1: integral
2: lag + filter
3: noise-constrained design
Includes +0.766 deg trim; limits +/-25 deg
Absolute elevator (deg)
Time (s)
Closed-loop tracking and sensor-noise transmission
|T| (dB)
Frequency (rad/s)
Sensitivity: low-frequency error and peak amplification
|S| (dB)
Frequency (rad/s)