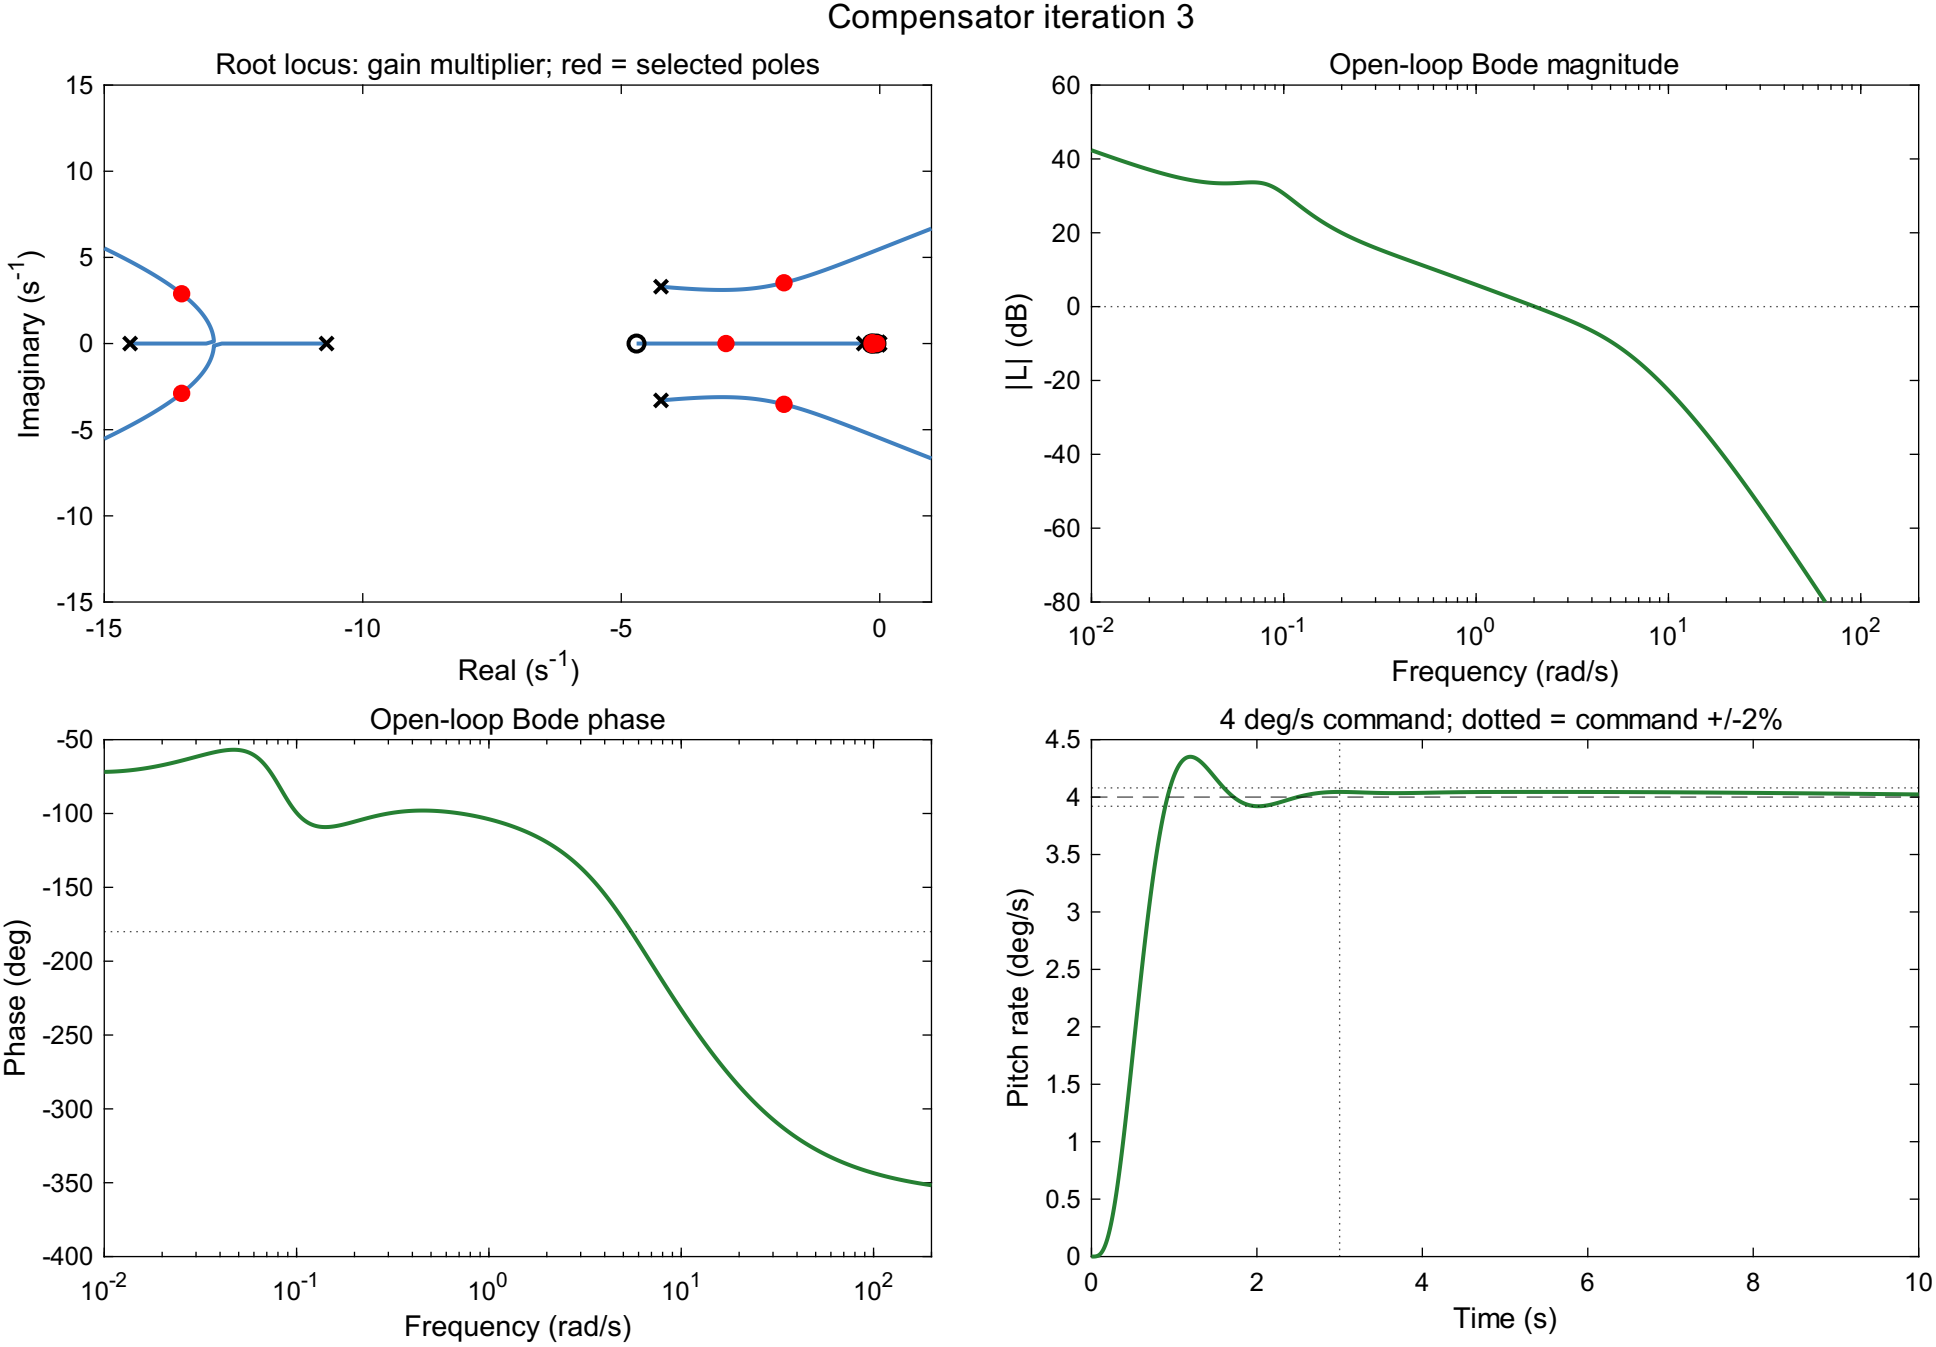

Compensator iteration 3
Root locus: gain multiplier; red = selected poles
Imaginary (s^-1)
Real (s^-1)
Open-loop Bode magnitude
|L| (dB)
Frequency (rad/s)
Open-loop Bode phase
Phase (deg)
Frequency (rad/s)
4 deg/s command; dotted = command +/-2%
Pitch rate (deg/s)
Time (s)