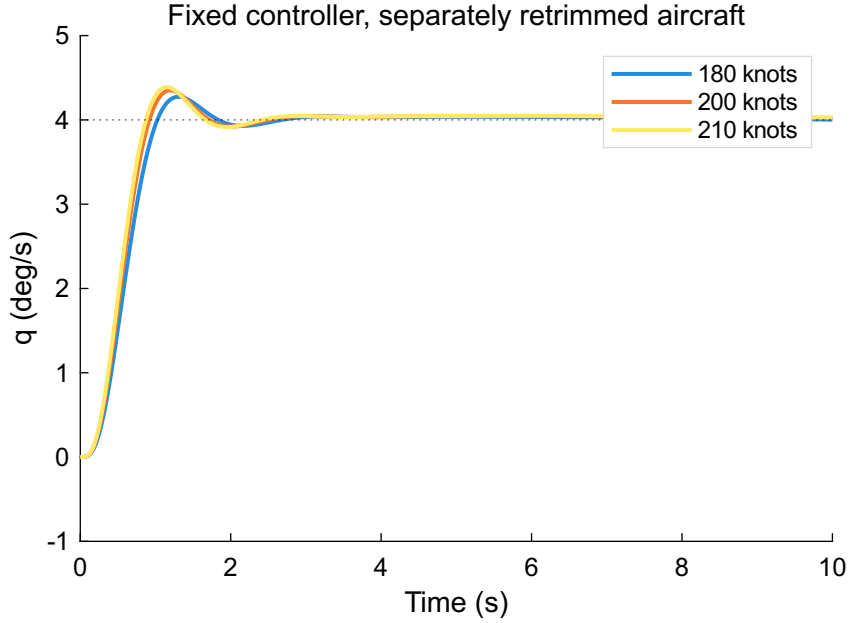
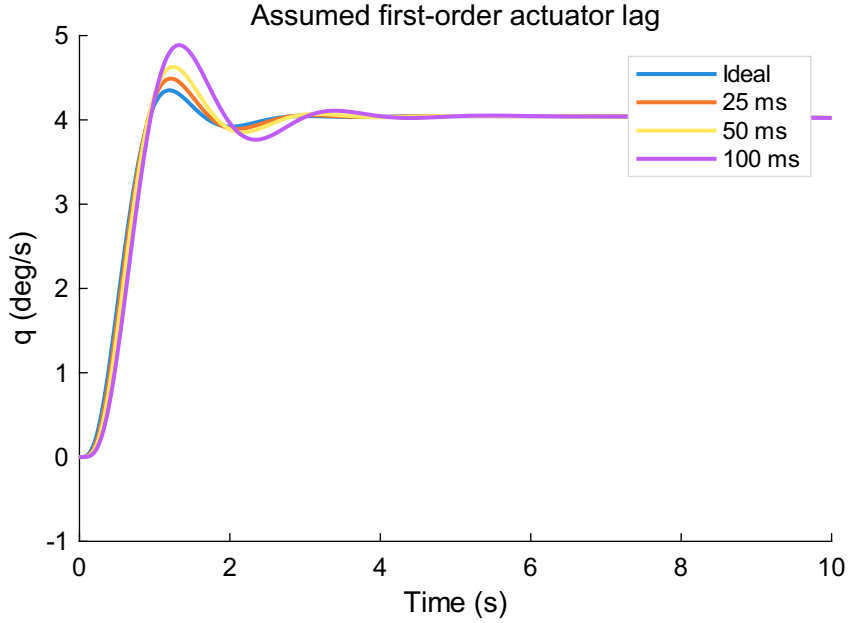
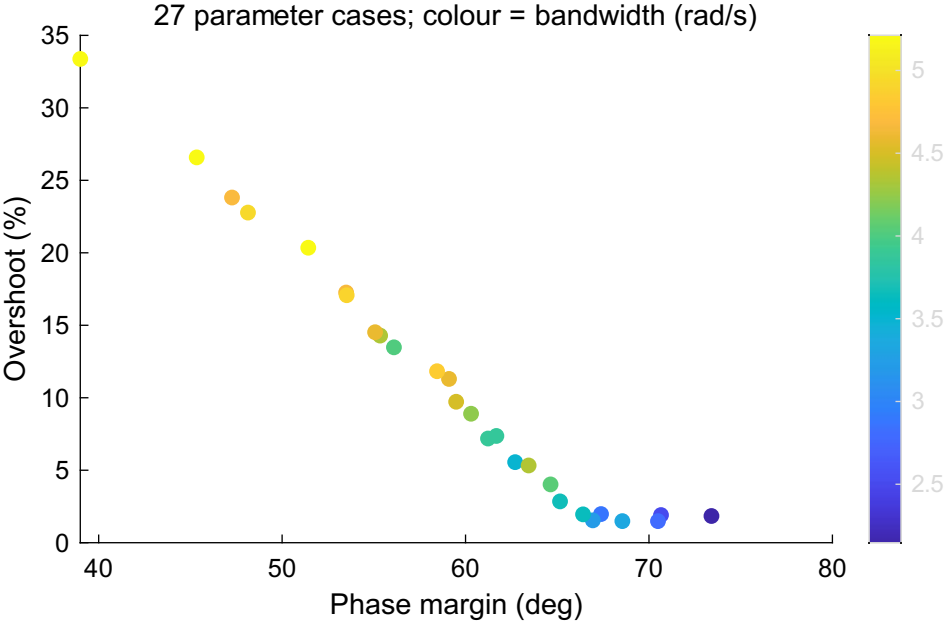
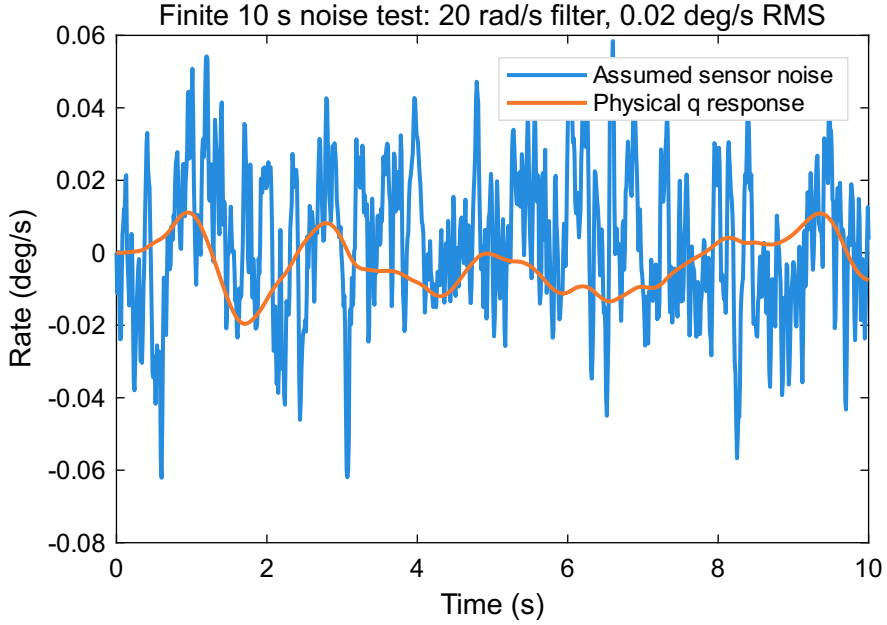

Fixed controller, separately retrimmed aircraft
180 knots
200 knots
210 knots
q (deg/s)
Time (s)


Assumed first-order actuator lag
Ideal
25 ms
50 ms
100 ms
q (deg/s)
Time (s)


27 parameter cases; colour = bandwidth (rad/s)
Overshoot (%)
Phase margin (deg)


Finite 10 s noise test: 20 rad/s filter, 0.02 deg/s RMS
Assumed sensor noise
Physical q response
Rate (deg/s)
Time (s)