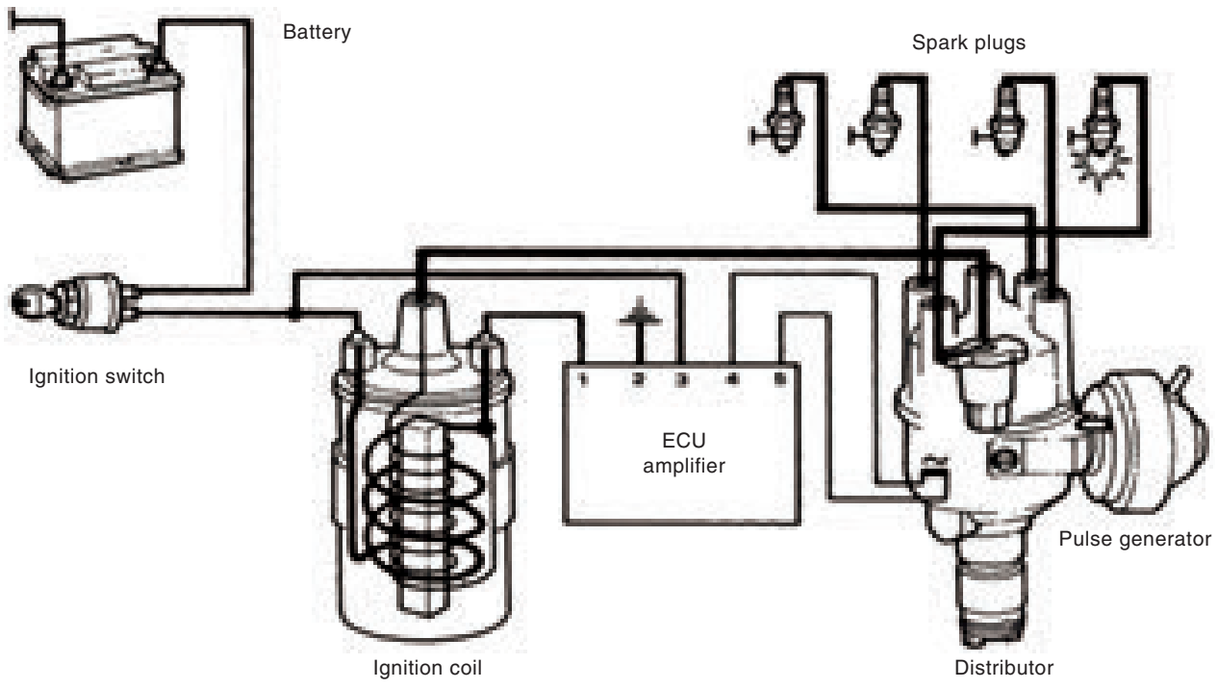


Figure 10.2.1.3 (b) Electronic ignition system

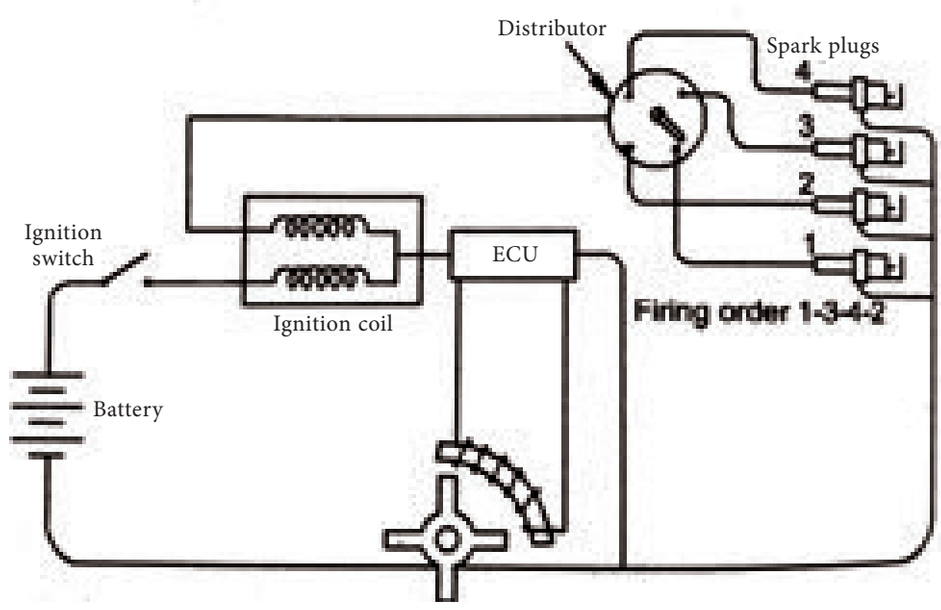


Figure 10.2.1.3 (c) Electronic ignition system

Working

Permanent magnet and pick up coil are placed in the distributor. The magnetic flux from the magnet will pass through the reluctor. Hence, electricity is generated. The current will flow through the electronic control unit. ECU has the diode and the transistor and it controls the flow of current to the primary circuit. When ECU closes the primary circuit, the primary winding charges. When ECU opens the primary circuit, the charge in the primary winding collapses and by mutual induction, high tension current

BAE_ENG_Chapter_10.indd 193 12/20/2019 1:10:23 PM