downstream service. If the call succeeds, the circuit breaker is reset and transitions to *closed*. Otherwise it goes back to being *open*. Figure 9.4 shows how a circuit breaker changes state.

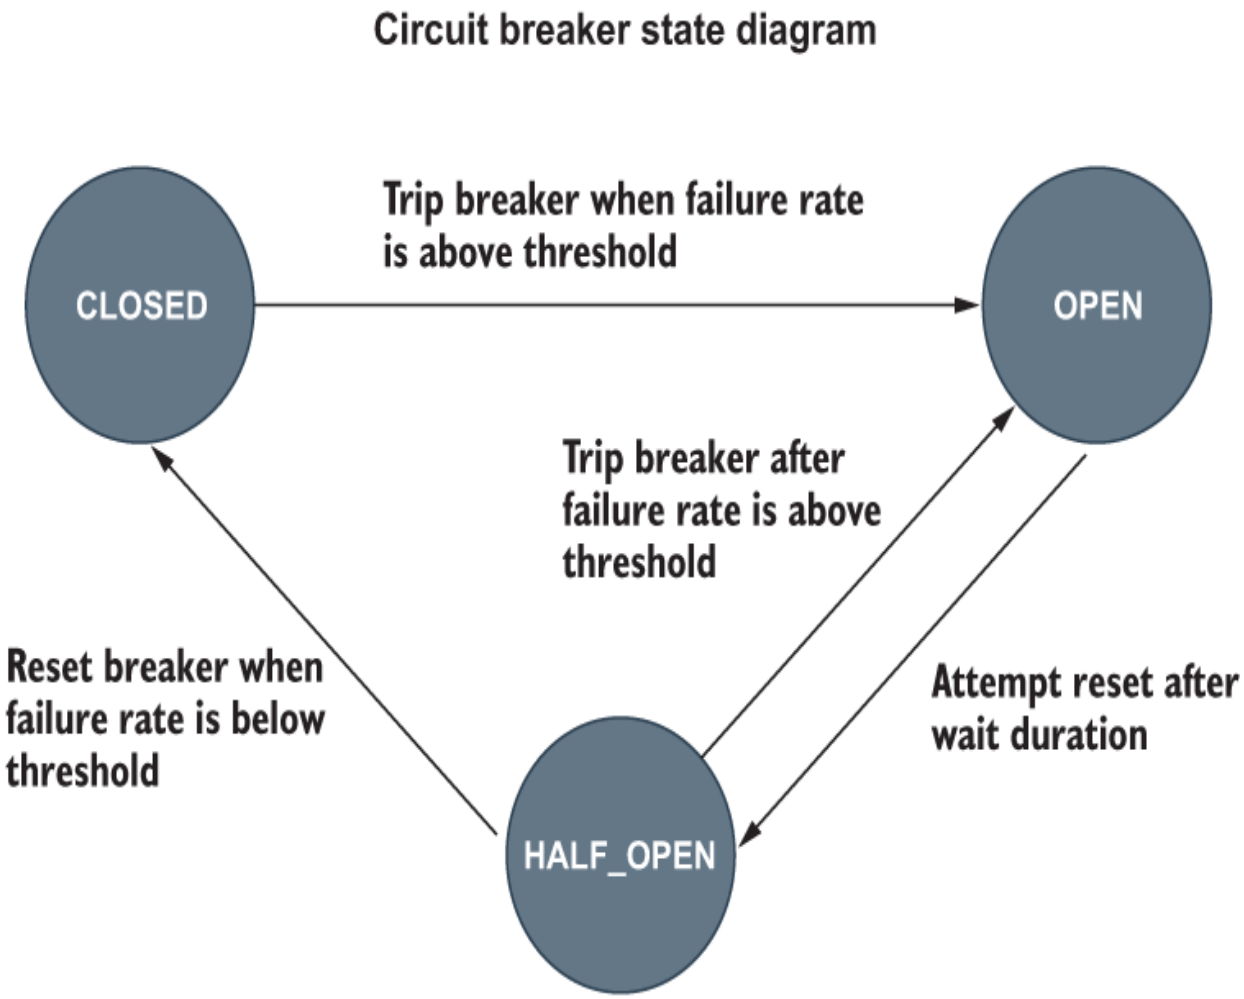


Figure 9.4 A circuit breaker ensures fault tolerance when a downstream service exceeds the maximum number of failures allowed by blocking any communication between upstream and downstream services. The logic is based on three states: closed, open, and half-open.

Unlike with retries, when the circuit breaker trips, no calls to the downstream service are allowed anymore. Like with retries, the circuit breaker's behavior depends on a threshold and a timeout, and it lets you