seed nodes and is still fully functional. The transitions of node 1 in this example are shown in figure 8.9.

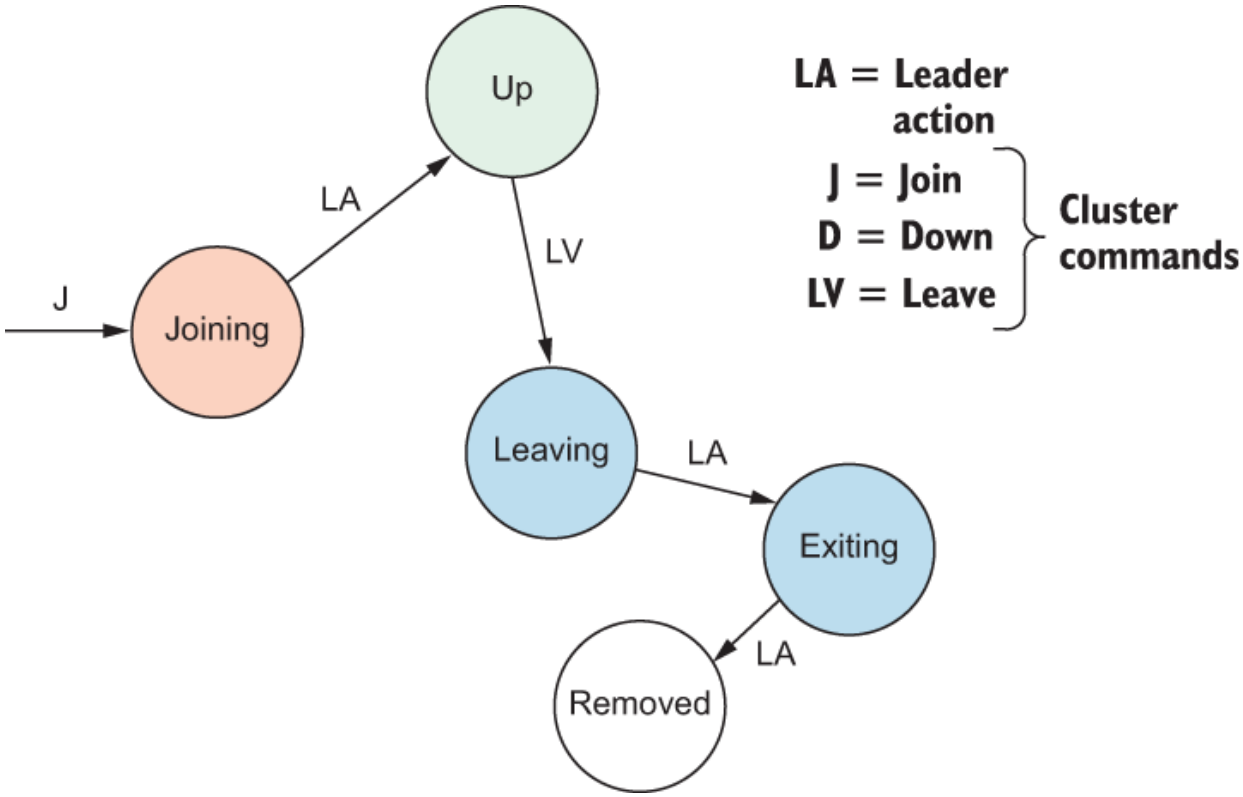


Figure 8.9 Seed node 1, from `Joining` to `Removed`

Now let's look at a situation where the state is not represented. This is the case when a node is missing.

8.2.5 Unreachable

There are various reasons a node cannot be reached, including a network partition, a very long garbage collector (GC) pause, or an ungraceful shutdown. In these cases, the leader cannot fulfill its duties: that is, the nodes cannot be set to the `Leaving` or `Up` state.