another coordinate, `j1 = (i+1) mod k`, to partition its children: as you can see in figure 9.16, that means that the successor of `N` doesn't have to be in `R`'s left subtree.

That's bad news, because it means that while for *BST*s we could quickly traverse `N`'s right subtree to its leftmost node, in order to find `N`'s successor, now we can only do that for levels `l` where `l mod k == i mod k`. In all the other levels, we will have to traverse both subtrees to look for the minimum.

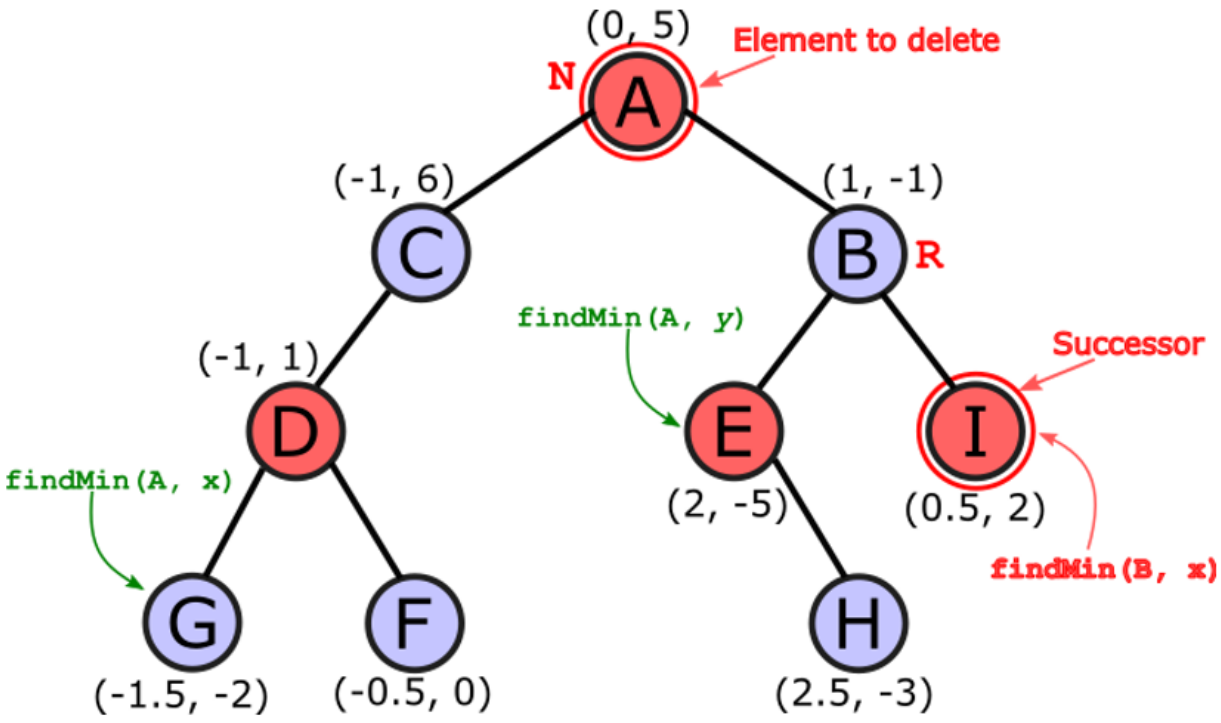


Figure 9.16 An example of how the successor of a node, or more in general the minimum of a subtree with respect to a certain coordinate, can lie anywhere in the subtree. The results of a few calls to `findMin` on the whole tree and on node `B` are explicitly shown.