


This logical way of representing any code using simple English is called ‘Algorithm’ and can be of great help for beginning with both, software or hardware programming.

Algorithm is one way of representing any piece of code. The second way is a graphical method called flow chart, which uses different types of boxes along with text to represent the logic of a program.

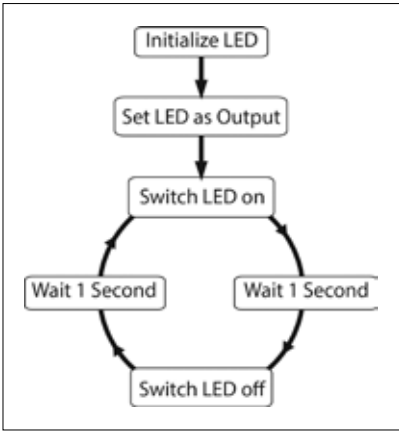

Flowchart for LED blink code

Flow chart

We’ll use our own tabular format for code in this booklet. Please refer to the original code to understand the similarity if you get confused.

Voltage Control using PWM

The Arduino™ board has PWM output on the Digital Pins 3, 5, 6, 9, 10 and 11. These pins can be used to control voltage. For instance, to control the

#define ledpin 3	LED pin for light intensity control
void setup () {	
pinMode (ledpin, OUTPUT);	Pin setting ANODE of LED pin
}	
void loop () {	
analogWrite (ledPin, 0);	Glow LED at zero intensity, LED OFF
delay (2000);	Wait for two seconds
analogWrite (ledPin, 64);	Glow LED at 25% intensity
delay (2000);	Wait for two seconds
analogWrite (ledPin, 127);	Glow LED at 50% intensity
delay (2000);	Wait for two seconds
analogWrite (ledPin, 191);	Glow LED at 75% intensity
delay (2000);	Wait for two seconds
analogWrite (ledPin, 255);	Glow LED at 100% intensity
delay (2000);	Wait for two seconds
}	