

folder 'myserver':

- `cd myserver`

In the newly created myserver directory, create an HTML file that will be accessed by the user to switch the motor or the solenoid ON or OFF by entering.

- `nano index.html`


Now type the following code in the text editor to create a webpage:

- `<!DOCTYPE HTML>`
- `<html>`
- `<head>`
- `<title>Plant watering using Raspberry PI</title>`
- `</head>`
- `<body>`
- `<h1> Plant Watering System </h1> <br>`
- `<a href="http://<ip-address>/pi_auto?motor_status=on">`
- `<h2> Turn ON the watering system</h2> </a> <a`
- `href="http://<ip-address>/pi_auto?motor_status=off"> <h2>`
- `Turn OFF the watering system</h2> </a>`
- `</body>`
- `</html>`

Now press [Ctrl] + [X] together, then [Y] and then press the [Enter] key to save the file.

You could use the circuit in Step 10 of the DIY at <http://dgit.in/1Bamn4R> to build an automatic watering system.

Next, open the browser on your PC and type the IP address of the Raspberry Pi to open the web interface for watering your plants.

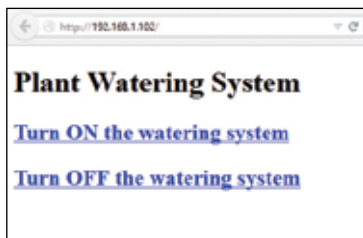

Webpage for plant watering system control

Create a weather monitoring system – AirPi

This DIY isn't a no-brainer and needs some serious knowledge about electronic hardware as, unlike the previous DIY, it has a slightly bigger circuit and needs some understanding of pin numbering and circuits. We'll be