



The Real 3D Touch


Want to know how a real 3D Touch actually works that too with just a software? Check this out! <http://dgit.in/real3DTouch>




iPad displays compared!

Here is a comparison of the displays on the iPad mini 4, iPad Air 2 and the iPad Pro. Which one's the best? <http://dgit.in/iDisplayComprn>

Digit Squad

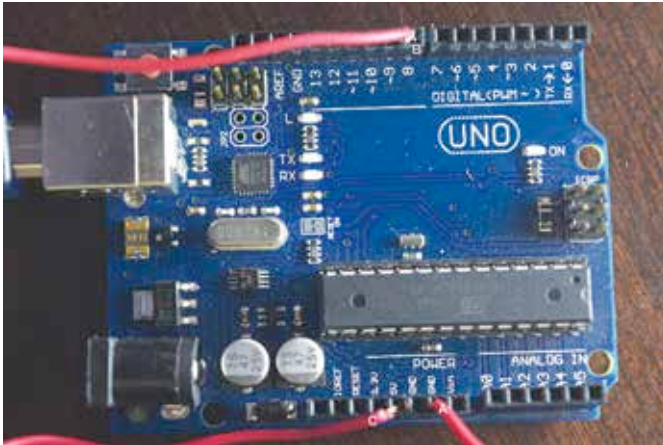

This is how your Arduino after connecting wires (labeled A, B and C in the image) would look like.

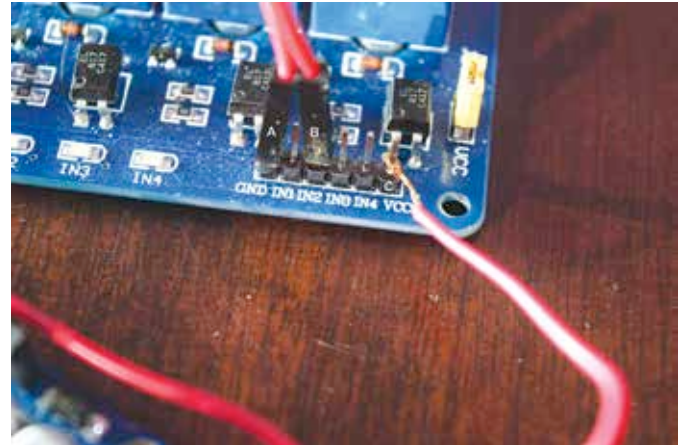

Connecting wires (labeled A, B and C in the image) from Arduino to the relay.

make your own, like I did. Same goes for the Arduino and relay, which are hard to find offline, especially when you're not living in a metro city.

Let's walk through the whole list of all the required components once again:

- Arduino Uno
- 4 Channel 5 Volt relay
- A computer
- Jumper wires (regular wires would also work)
- Arduino IDE software (get it from <https://www.arduino.cc/en/Main/Software>)
- 'Processing' software (get it from <https://processing.org/download/>)
- Hosting space and a domain name (for the website; however, XAMPP would also work)

This project involves two short programs that will be written in Arduino IDE & 'Processing' so it is recommended that you comprehend them well so that you can make your own changes later. Of course, a quick copy-paste job would also get the work done.

Let's talk about the basic functioning of this project. There would have to be two ends, one from where the appliance is controlled and the other being the website via which you'll give commands to either turn it on or off. The former would also feature the Arduino, relay and a computer (to receive commands from the website). Here, you could also use an Ethernet-shield instead of a computer on top of the Arduino, but then, why bother buying one, when your computer would work just fine? You would need to install Arduino IDE on the computer, of course – it would help to load the program onto Arduino while 'processing IDE' would be used to keep checking the website for the appliance status, i.e. whether to turn it on or off.

The other end is basically a website that we'll create. Its purpose is to simply display a button, which, on getting clicked, would update a value ('1' for on and '0' for off) in a '.txt' file, which in return would be continuously checked by the Processing IDE on the first end. Hopefully, this isn't the first time you're coming across 1's and 0's since Arduino uses them as flags for the different input / output pins. If it observes a change in value, then

the Processing IDE would write the desired value to the Arduino Serial Monitor and upon receiving it, send the appropriate commands to Arduino hardware via USB, which will then control the relay depending upon the command. Thus, the circuit would be made or broken. Sounds confusing? Worry not. Take a quick look at the whole set-up (on the appliance's end) which explains how the components would be connected.



PC, Laptop
Tablet, Mobile

सुरक्षा



92.72.70.70.50
98.22.88.25.62

india
antivirus.com