

Fake Firefox update


Spam mail, including a link to a Firefox update which includes a password stealing trojan, is currently circulating. Beware



Bumpy ride

The London Ambulance service claims that speed bumps kill almost 85 people for every 1 person saved!

DIY

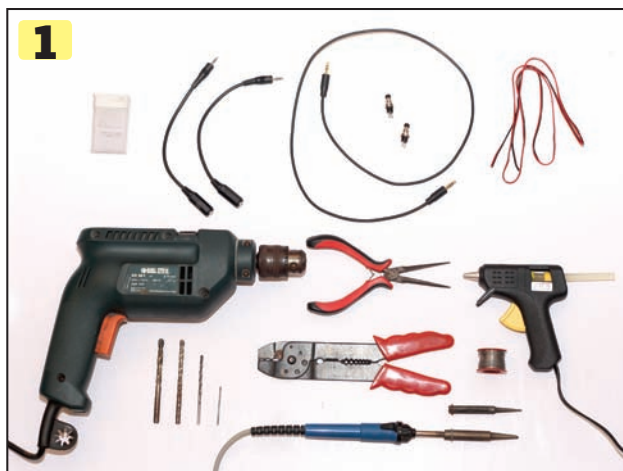

Tools required:

Soldering gun, solder and flux; wire strippers; drill (optional); a precise ruler or Vernier callipers; glue gun (optional); marker pen (optional)




Hold the container in your hand and decide where you want the buttons placed. Bear in mind that there will be two buttons. Now, measure the diameter of the switches and note it down.




Drill the marked holes to a little less than the diameter of the switches. You might also need to make an opening at the bottom to put in the wires.

Items required (approx. ₹200):


Small empty bottle or container (we used a Tic-Tac container)
2.5mm to 3.5mm stereo headphone adaptors (2 nos. - ₹60 each)
Stereo line-out/line-in extension cable (1 nos - ₹25-50)
A length of wire 20 cm at most. (₹5)
Switches (2 nos - ₹20 each)

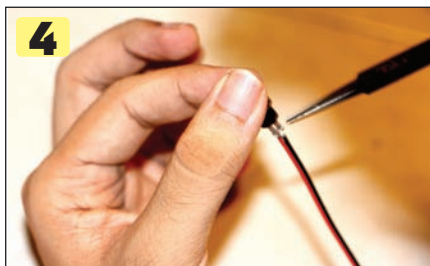


Solder the contacts as shown in the circuit diagram. Just make sure none of the contacts are shorted.

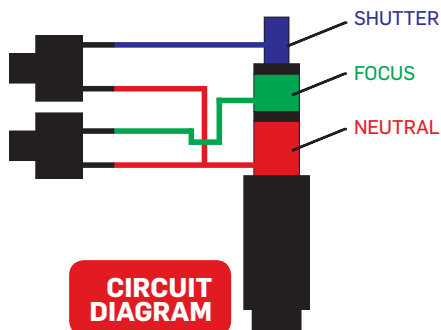

As we used a Tic-Tac box, we inserted a 2.5 mm to 3.5 mm adaptor through it and knotted the end to ensure it didn't slip out.

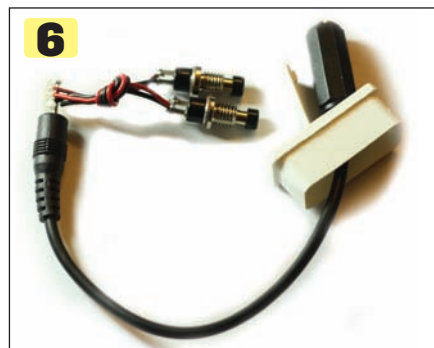

Attach the cables to the 2.5mm jack using the circuit diagram as reference. After soldering the contacts, we glued the whole setup so that the wires didn't come loose.

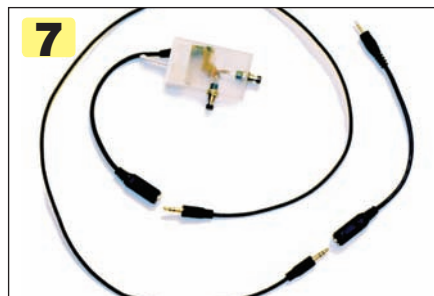

Carefully insert the apparatus into the box and slot in the buttons. Connect the cables as shown.

Your dSLR remote trigger is ready. Hook it up and fire away! Press the focus button to verify the focus, press the shutter button to focus and shoot.



Ching's Secret

Instant, Hakka & Pad Thai Noodles,
Soups, Sauces & Miracle Masala
Ching's Khao, Baki Bhool Jao