

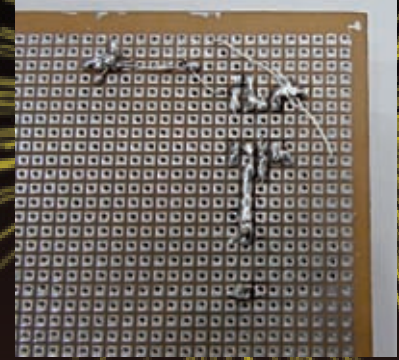


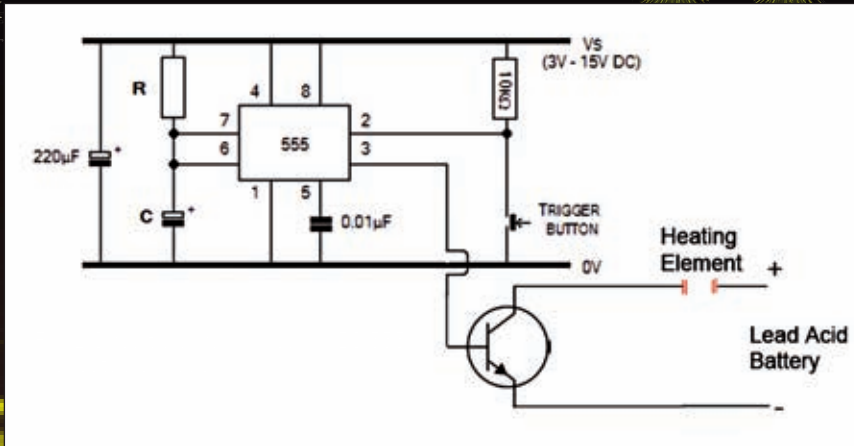

The connections at the back of the circuit, looks pretty messy but it's way better than a breadboard

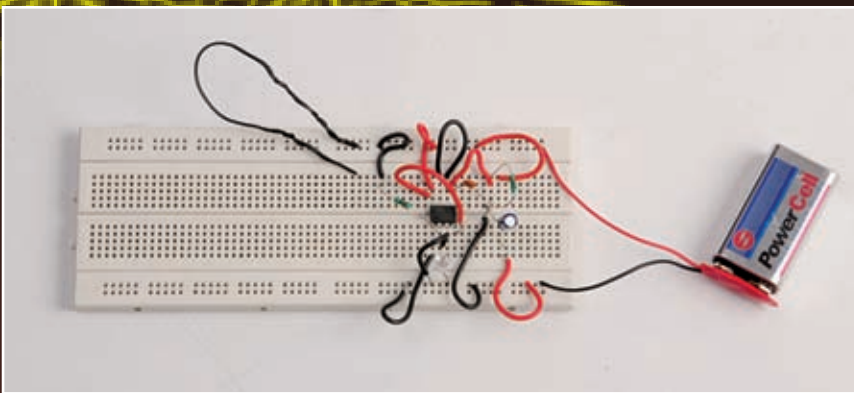

Prototyping the circuit on a breadboard

centration so the enclosure will require to be ventilated after a few ignitions.

The heating element is formed by coiling some Nichrome/Tungsten wire or any metal with high electrical

resistance compared to the connecting wires you'll be using. Ensure that the connecting wires are thick and of low resistance, ideally 22AWG. The heating element can be attached intermittently to set off multiple firecrackers. If you can't get the proper wire thickness, don't try this project! The

heating element gets hot fairly quickly and is often used for triggering synchronised fireworks. Also, the heating element should be as close as possible to the battery. Basically, the entire loop that connects the transistor-heating element-battery will get hot so rather than having a huge loop, a smaller loop would help reduce the time pulse required.

A best case scenario would be if you happened to get your hands on some Nichrome wire as it heats up rather quickly so one only needs a really short time pulse.

You can set up an entire array of fireworks to ignite at the very same moment, or using multiple IC555 delay circuits create time pulses of varying duration. If you can find out the time gap between individual notes of a song, then you can create a synchronised firework display. It's great fun! **d**



The final circuit with a battery to power the circuit. The positive terminal of the lead acid battery is connected to the tab of the transistor and the negative terminal to pin 2 of the transistor. Copper wires are used to connect the lead acid battery to the transistor with a nichrome loop in series to act as the heating element

Disclaimer: The content of the pages of this article is for your general information and use only. Neither we nor any third parties provide any warranty or guarantee as to the accuracy, timeliness, performance, completeness or suitability of the materials found in this article for any particular purpose. You acknowledge that such information and materials may contain inaccuracies or errors and we expressly exclude liability for any such inaccuracies or errors to the fullest extent permitted by law. Your use of any information or materials in this article is entirely at your own risk, for which we shall not be liable. It shall be your own responsibility to ensure that any products, services or information available through this article meet your specific requirements.