


8.2 Common Symptoms, Problems And Solution

► **Problem:** The computer beeps and doesn't boot. The error beeps may vary between BIOS manufacturers. A memory error beep-code is normally repeated long beeps with an interval of a few seconds. If your machine produces this pattern of beeps, and the system fails to boot, you have problems with your RAM module(s).

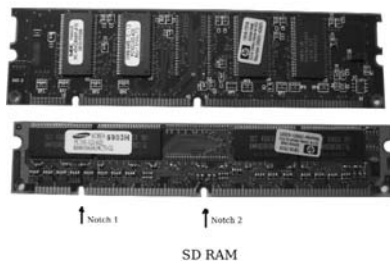

When choosing SD RAM make sure to choose the one supported by your motherboard

Cause: The problem can be due to a loosely-inserted module. Other causes could be failure of the BIOS to recognise the module, and the failure of the module itself.

Solution: Clean the modules and the slot using non-static cloth, carefully insert the modules (making sure the notches match and that the clips hold the RAM in the slot), and start the machine. This should take care of loosely-inserted modules or improper contact due to accumulation of dust or fungus. If the problem is not solved, make sure you have a RAM module that matches your system (motherboard) requirements. If all these fail, perform a BIOS update. Check with the motherboard manufacturer whether an update is necessary to support the RAM module you purchased. Contact a technician or the dealer from whom you purchased the system if the problem persists.

► **Problem:** The system doesn't display the proper memory value. The system boots normally, but Windows doesn't show all of the installed memory capacity.

Cause: Do you use on-board graphics? If yes, then the graphics will share memory from the system RAM, since it doesn't have its own. If the installed module is dual-banked and the system board only supports single-banked memory, then the computer will read and