

# ASH Power

Variant: [No Variations]

## Table of content

Text



## Introduction

Text

## Specifications

Text

- \* I2C control address:
  - CONTrol: 0x70
  - EYEs: 0x48
- \* I2C slave addresses:
  - USB-PD: 0x28
  - Mux: 0x70 (1,2)
  - Charger: 0x6D
  - Leg-control: 0x60-0x63
  - Leg-isense: 0x70-0x73

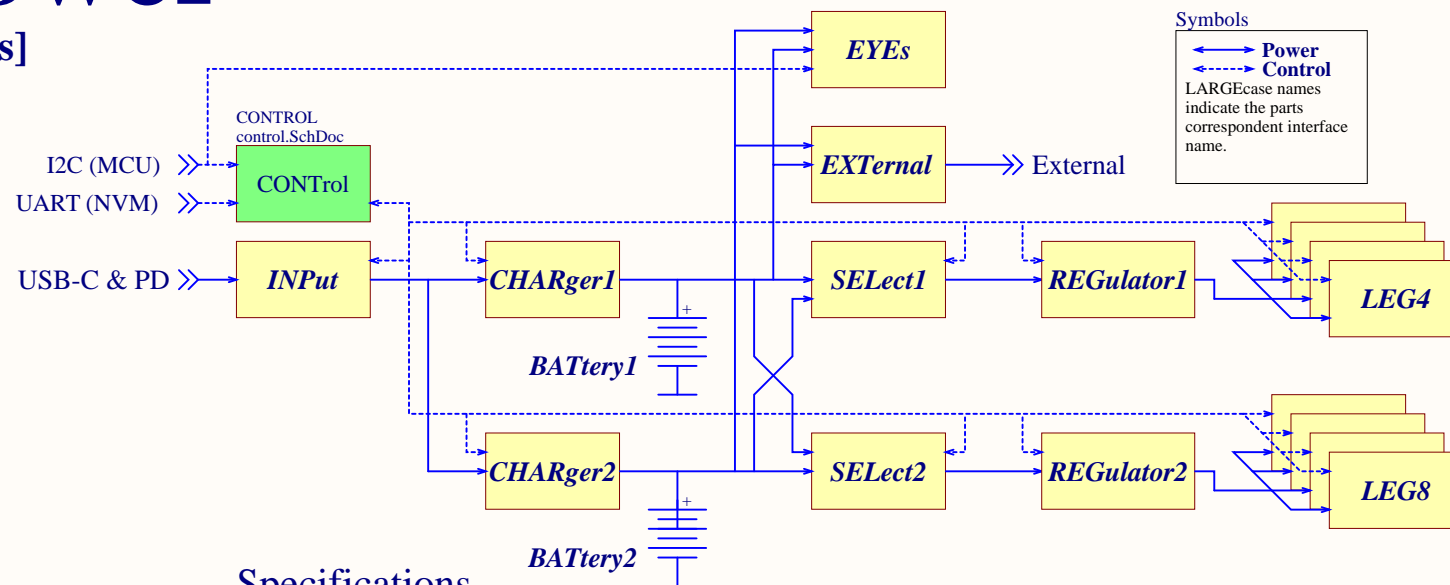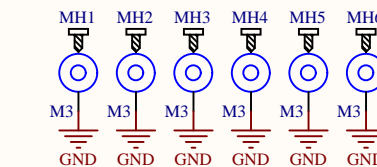

### Carrier connector

- 1 - NC
- 2 - GND
- 3 - \MASTER\_FAULT
- 4 - NC
- 5 - \BATTERY\_LOW
- 6 - NC
- 7 - SELF\_TEST\_OK
- 8 - NC
- 9 - RX (Carrier TX)
- 10 - TX (Carrier RX)

### External connector

- 1 - SCL
- 2 - GND
- 3 - GND
- 4 - SDA
- 5 - VS
- 6 - VS

Title **ASH Power - Cover**

GPA Robotics

Size: **A4**

Number: **1**

Revision: **1**


Date: **2020-02-19**


Time: **01:10:04**


Sheet **1** of **12**

Repo: <https://github.com/Atmelfan/pcb-ash-power.git>



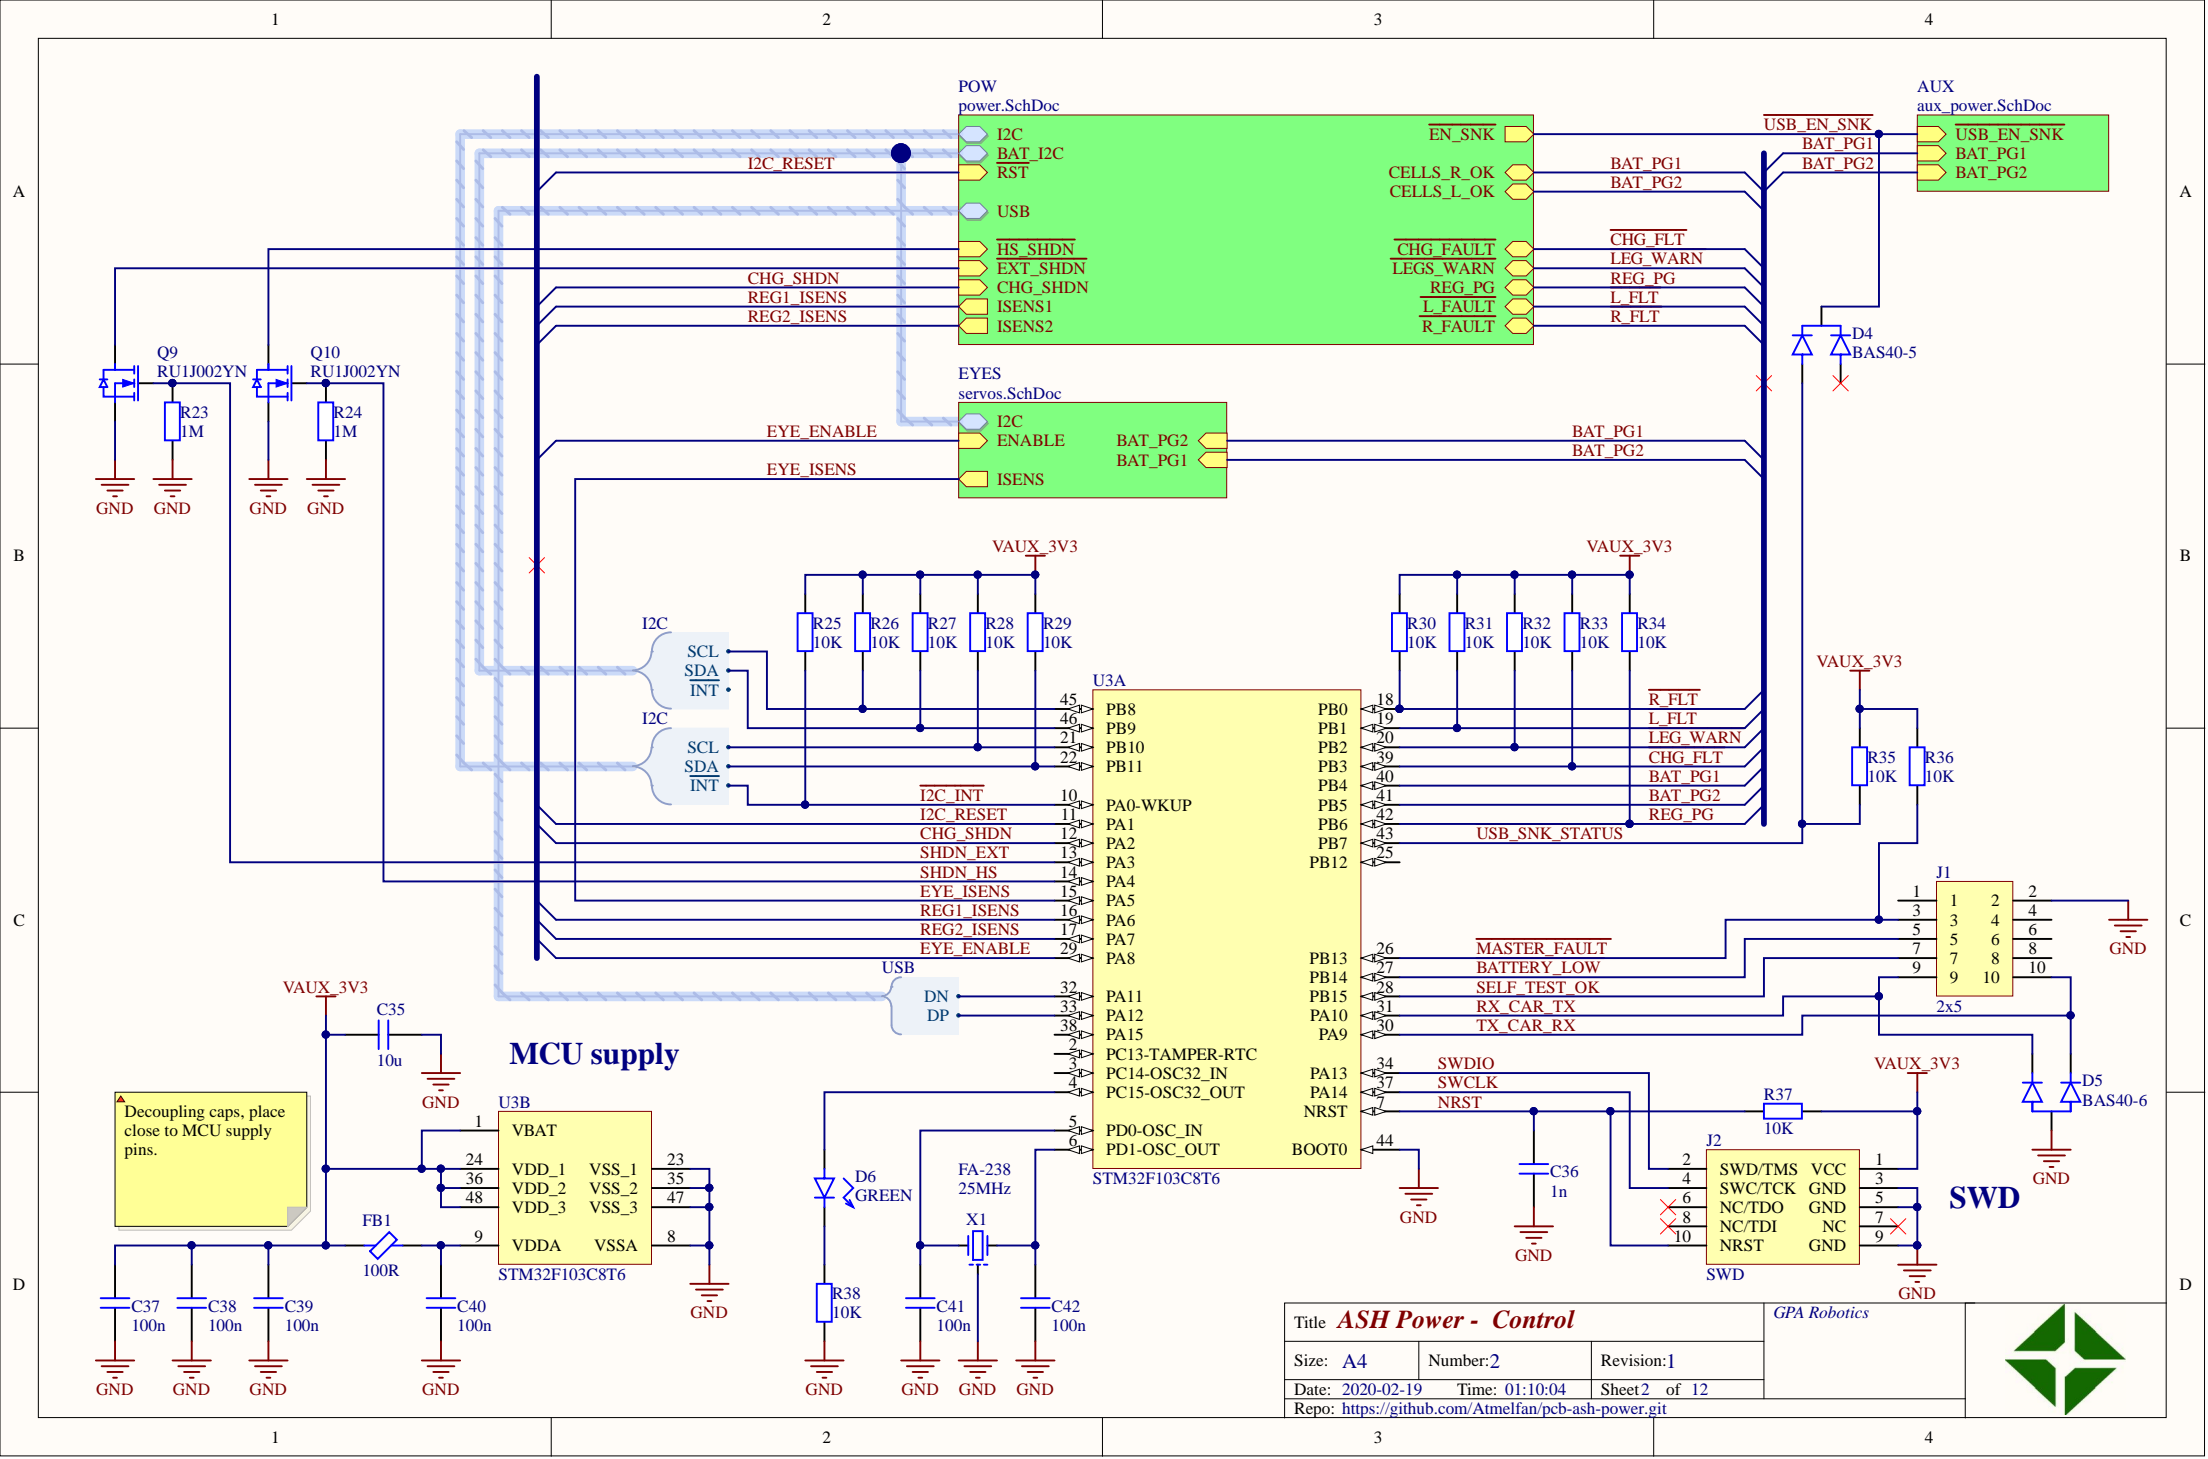

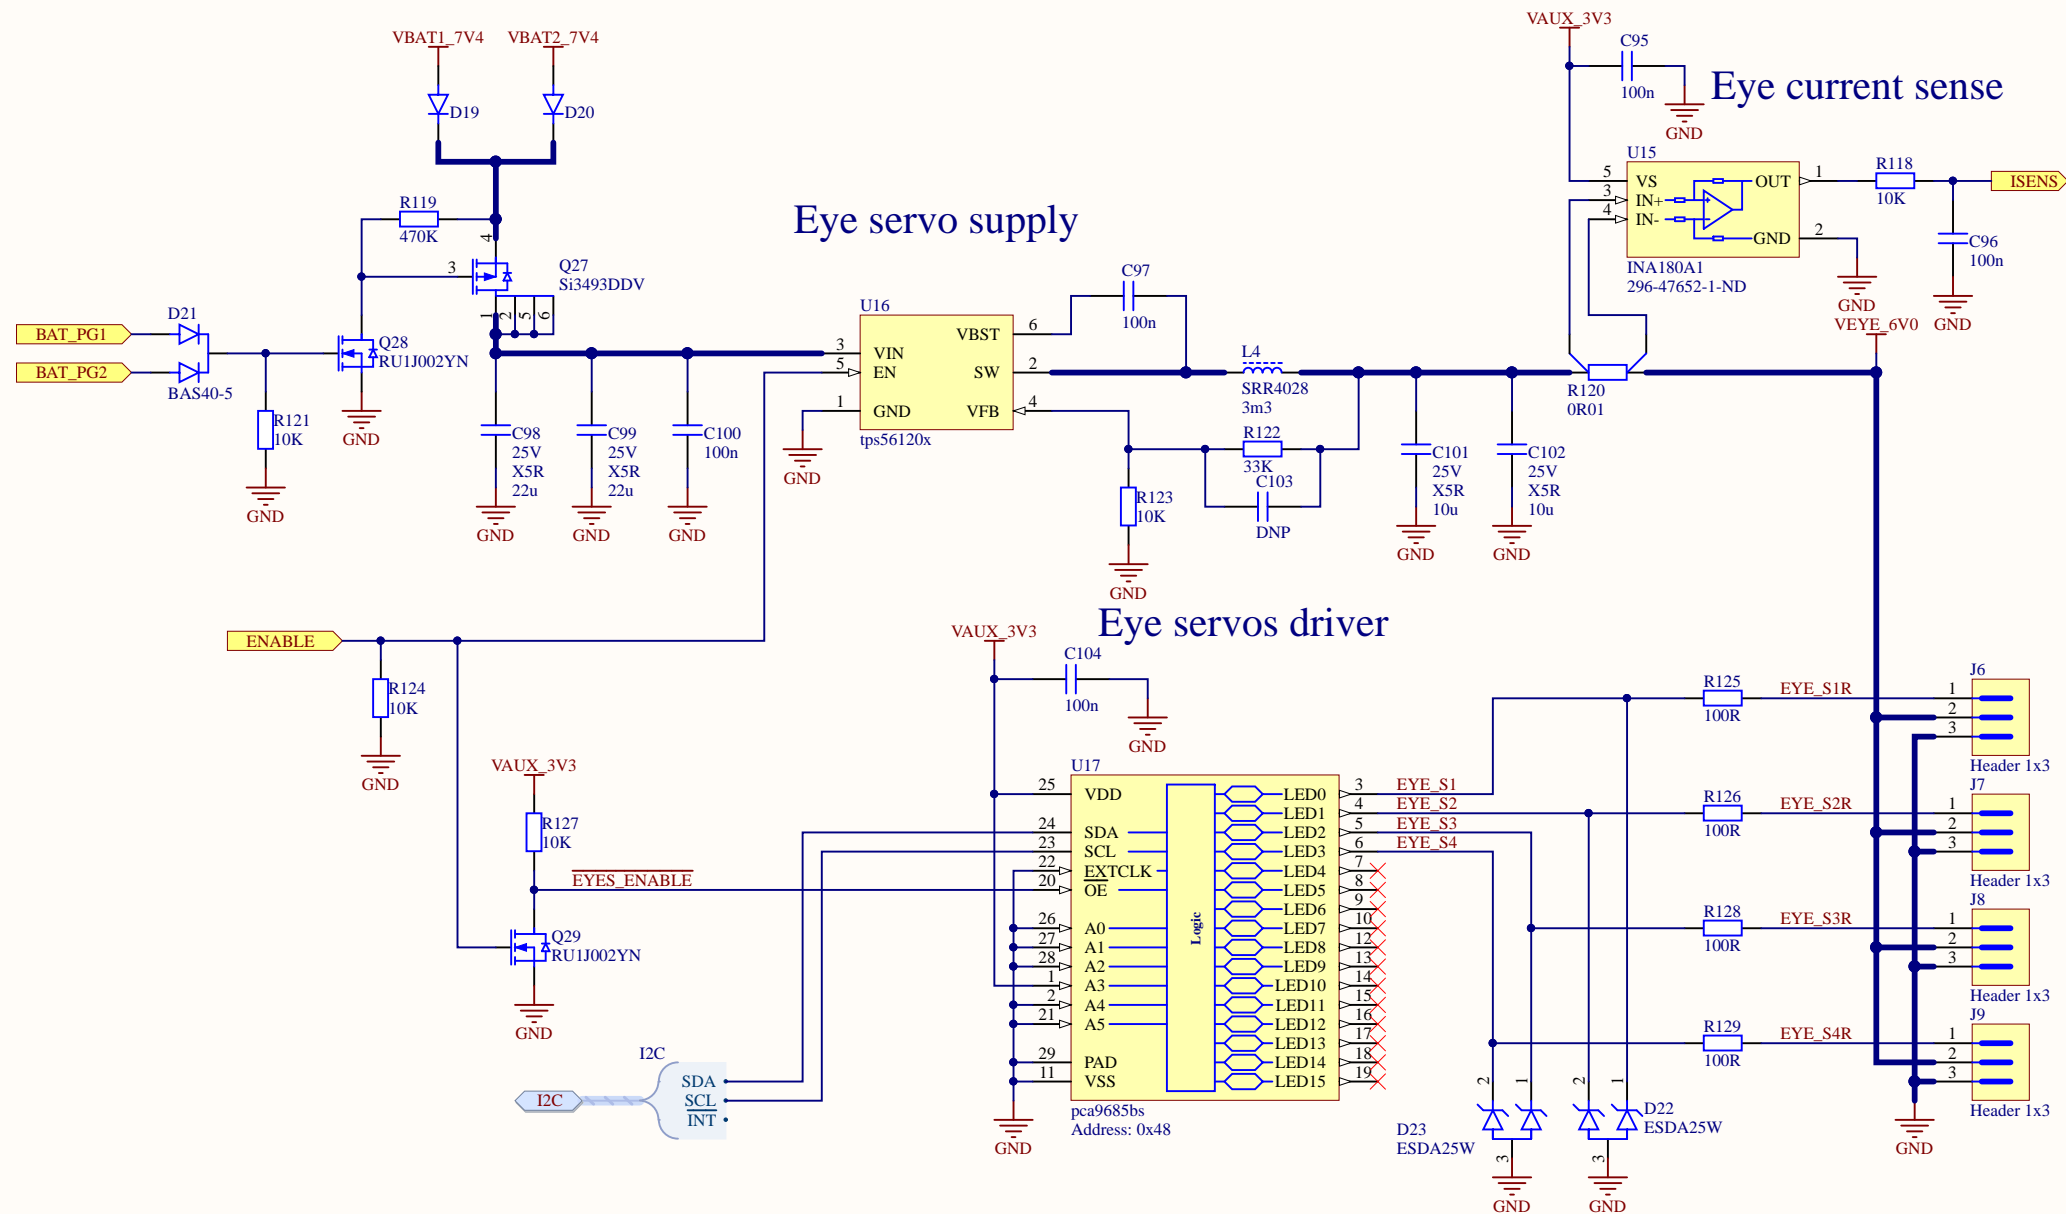

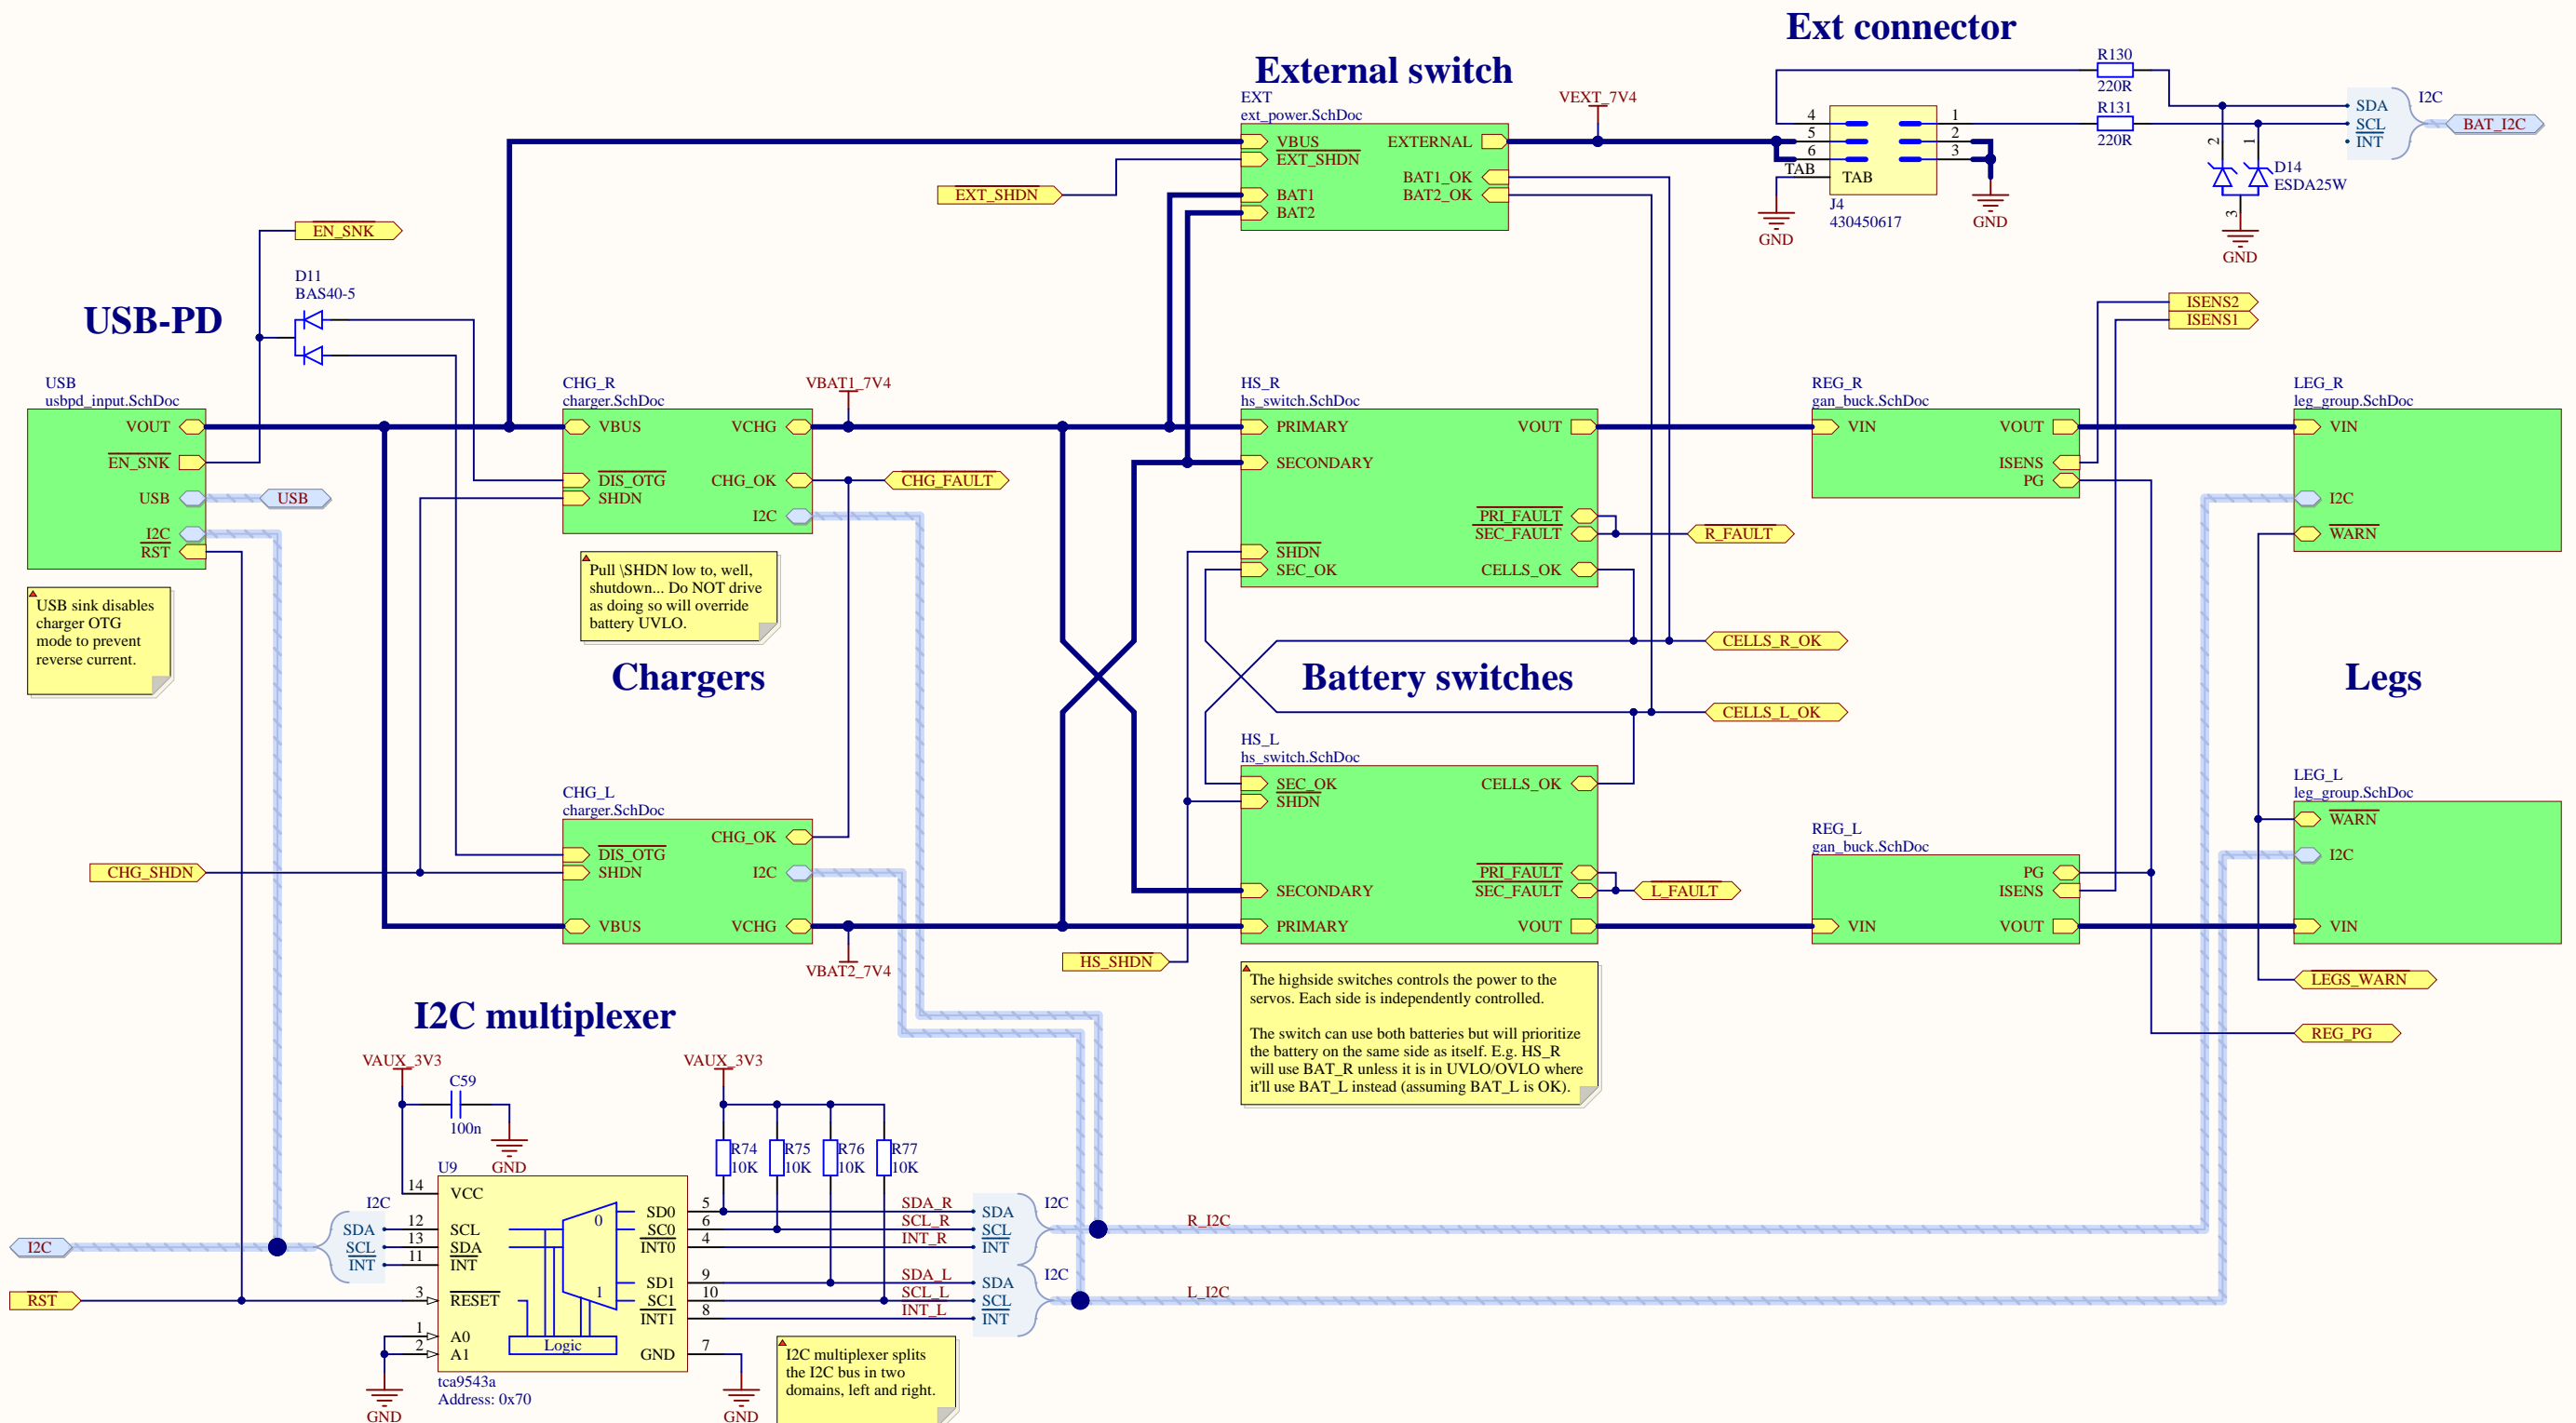



A

A

B


B

C

C

D

D

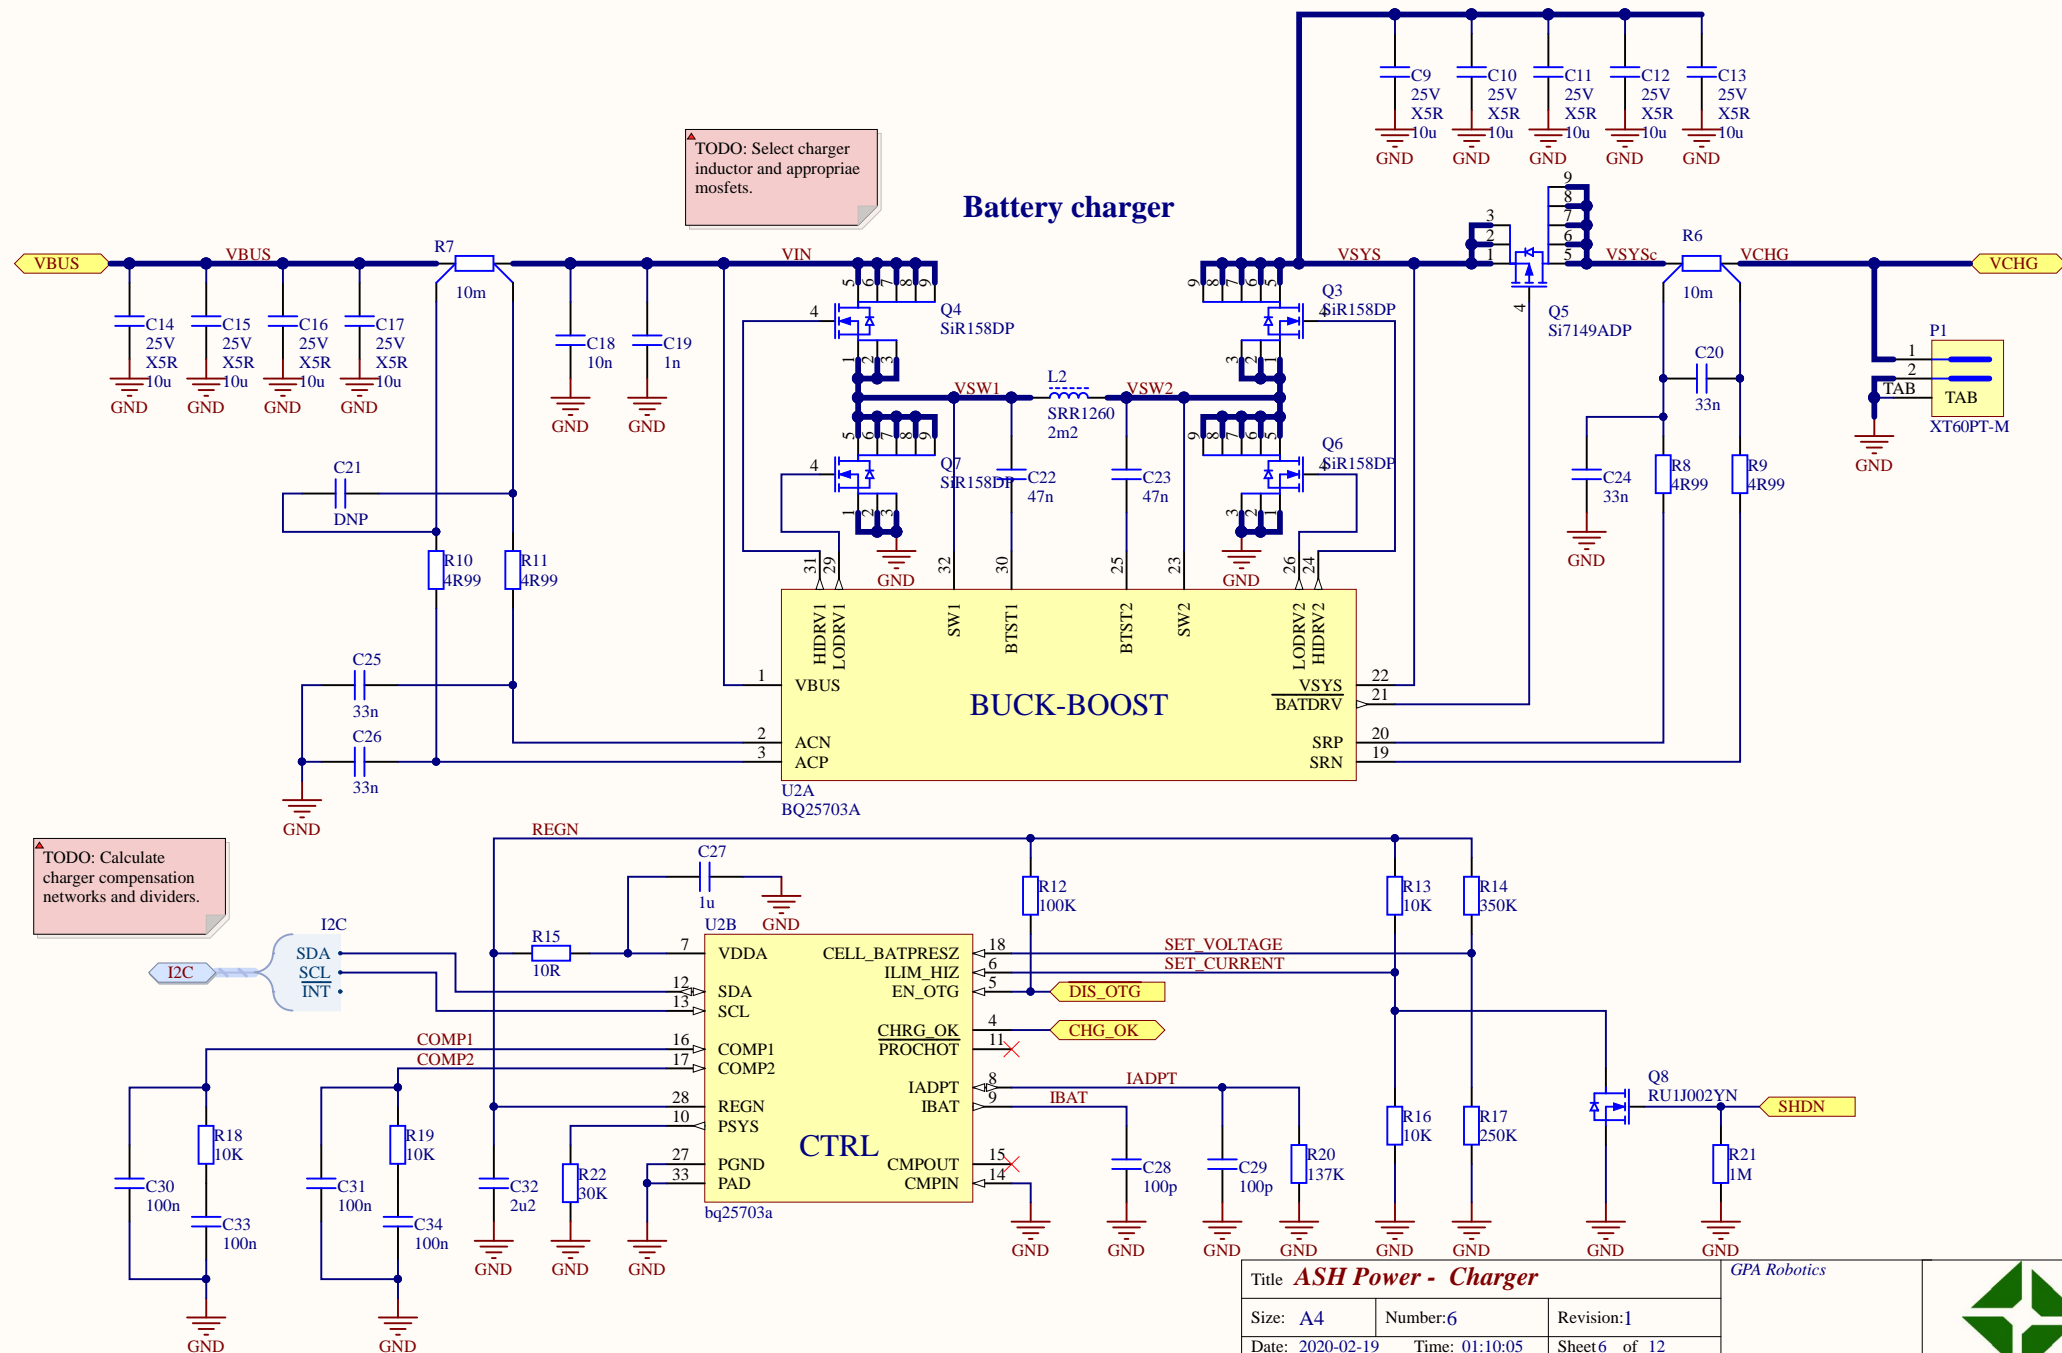

A

A

B


B

C

C

D

D

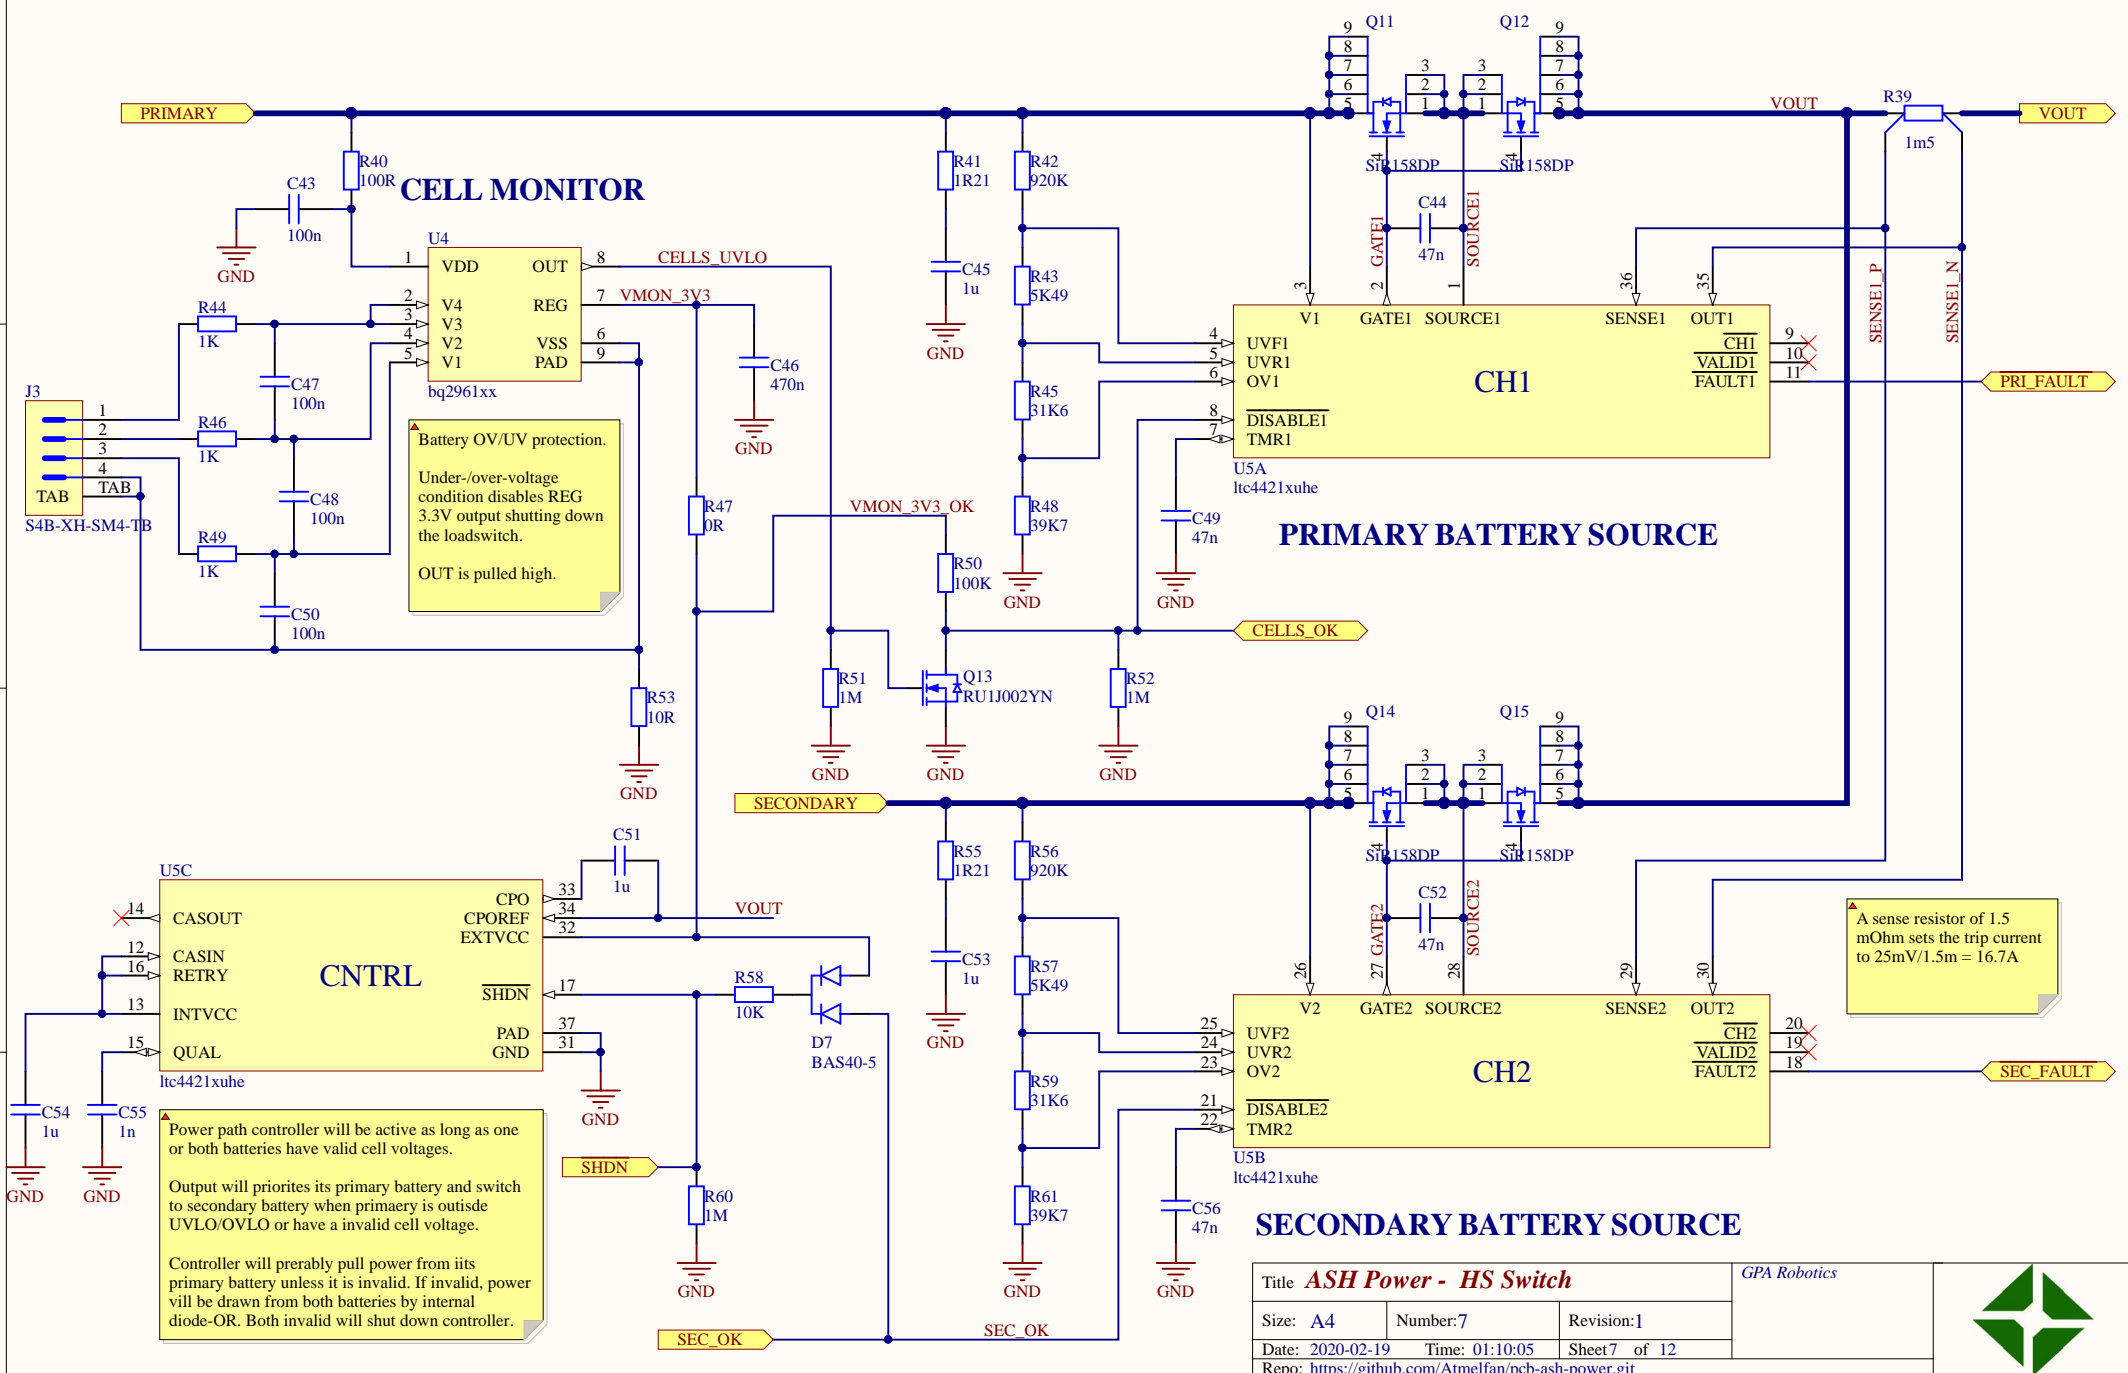Title **ASH Power - HS Switch**

GPA Robotics

Size: A4

Number: 7


Revision: 1

Date: 2020-02-19

Time: 01:10:05

Sheet 7 of 12

Repo: <https://github.com/Atmelfan/pcb-ash-power.git>

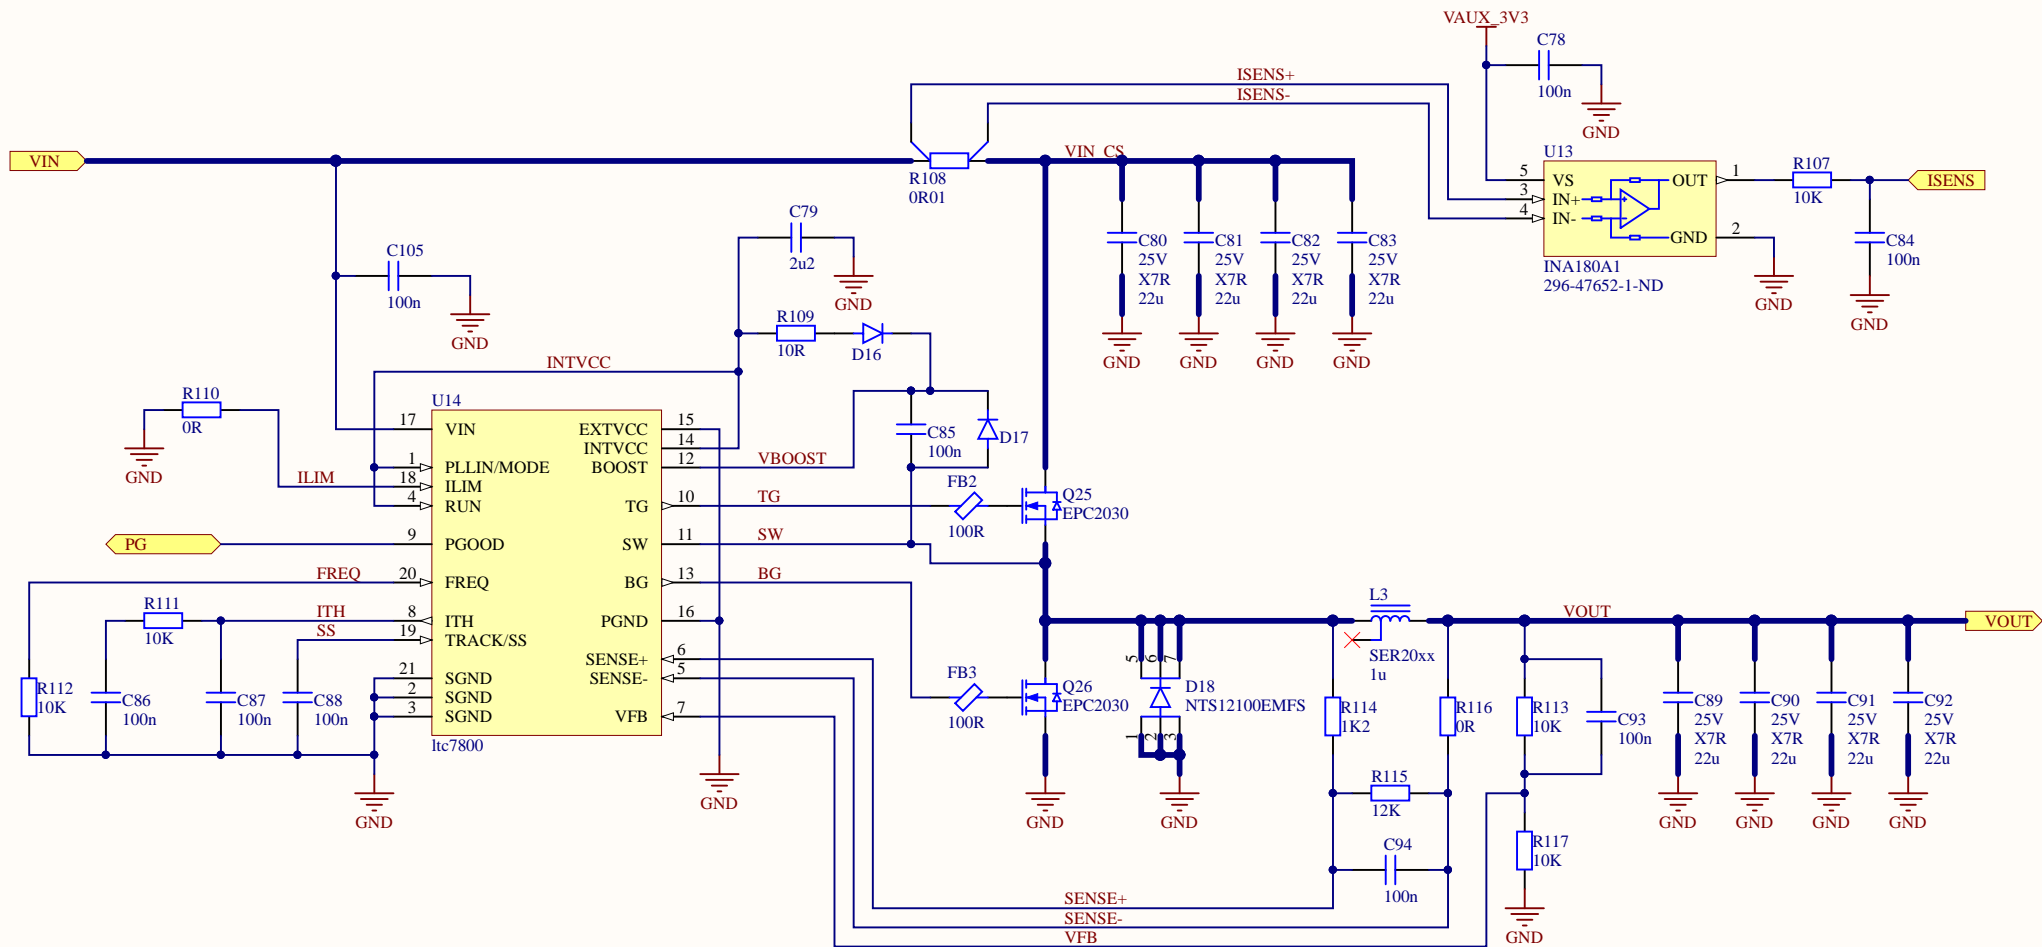

Title **ASH Power - GaN Step-down**

GPA Robotics

Size: **A4**

Number: **8**

Revision: **1**

Date: **2020-02-19**

Time: **01:10:05**


Sheet **8** of **12**

Repo: <https://github.com/Atmelfan/pcb-ash-power.git>






## Front pair

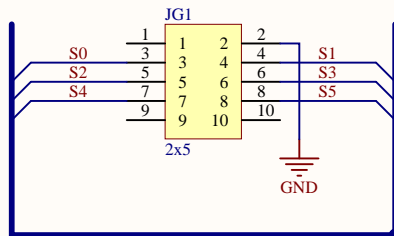


## Back pair

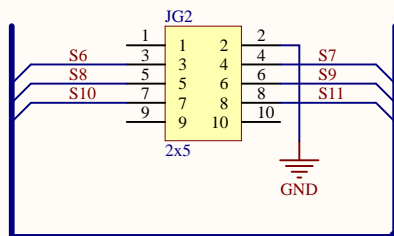

## LEG1

leg\_module.SchDoc

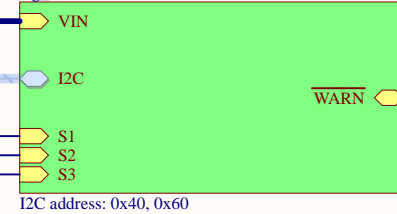


## LEG2

leg\_module.SchDoc




## LEG3

leg\_module.SchDoc

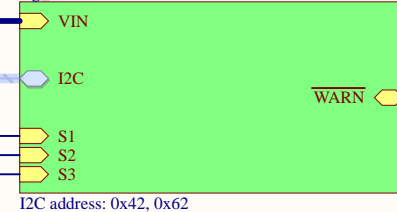

## LEG4

leg\_module.SchDoc

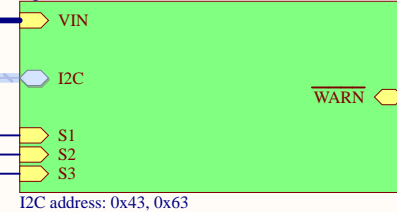

The board has two leg groups, right and left. Each group consists of four legs which is further divided into two pairs, front and back. Each pair has a input PWM signal connector (JG1 and JG2).

Each leg has its own independent step-down converter and power monitor (for each of the legs three servos).

Title **ASH Power - Leg group**

GPA Robotics

Size: A4

Number:9

Revision:1

Date: 2020-02-19

Time: 01:10:05


Sheet9 of 12

Repo: <https://github.com/Atmelfan/pcb-ash-power.git>






## VAUX power path control

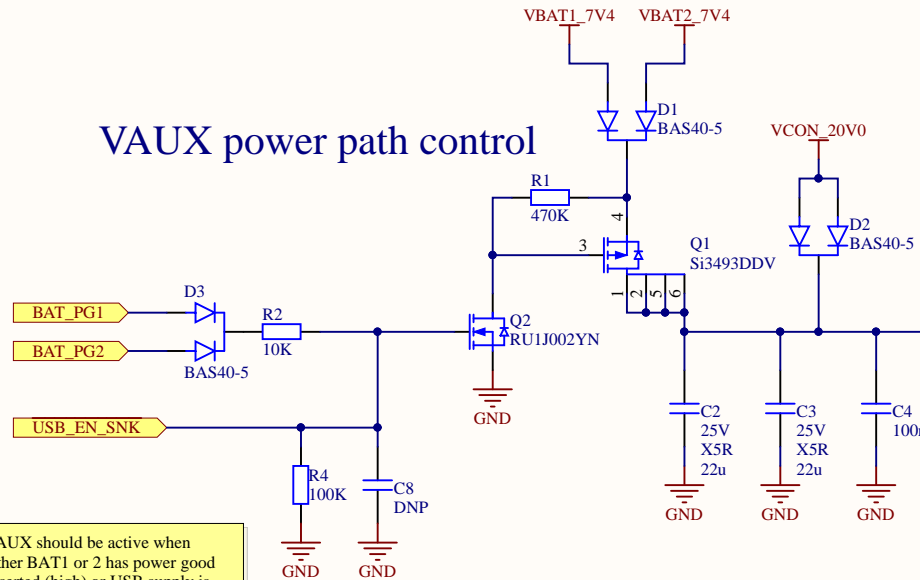

## VAUX supply

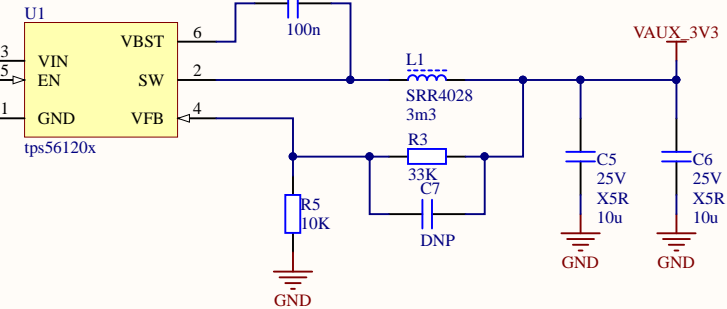

VAUX supplies the control circuitry of the power board.

VAUX should be active when either BAT1 or 2 has power good asserted (high) or USB supply is available.

If USB supply is available (5-20V) batteries should not be used for VAUX (even if VBATn > VBUS).

Title **ASH Power - AUX supply**

GPA Robotics

Size: **A4**

Number: **11**

Revision: **1**

Date: **2020-02-19**

Time: **01:10:06**

Sheet **11** of **12**

Repo: <https://github.com/Atmelfan/pcb-ash-power.git>



A

A

B

B


C

C

D

D

EXTERNAL power path controller will be active as long as VBUS is connected or batteries are valid.

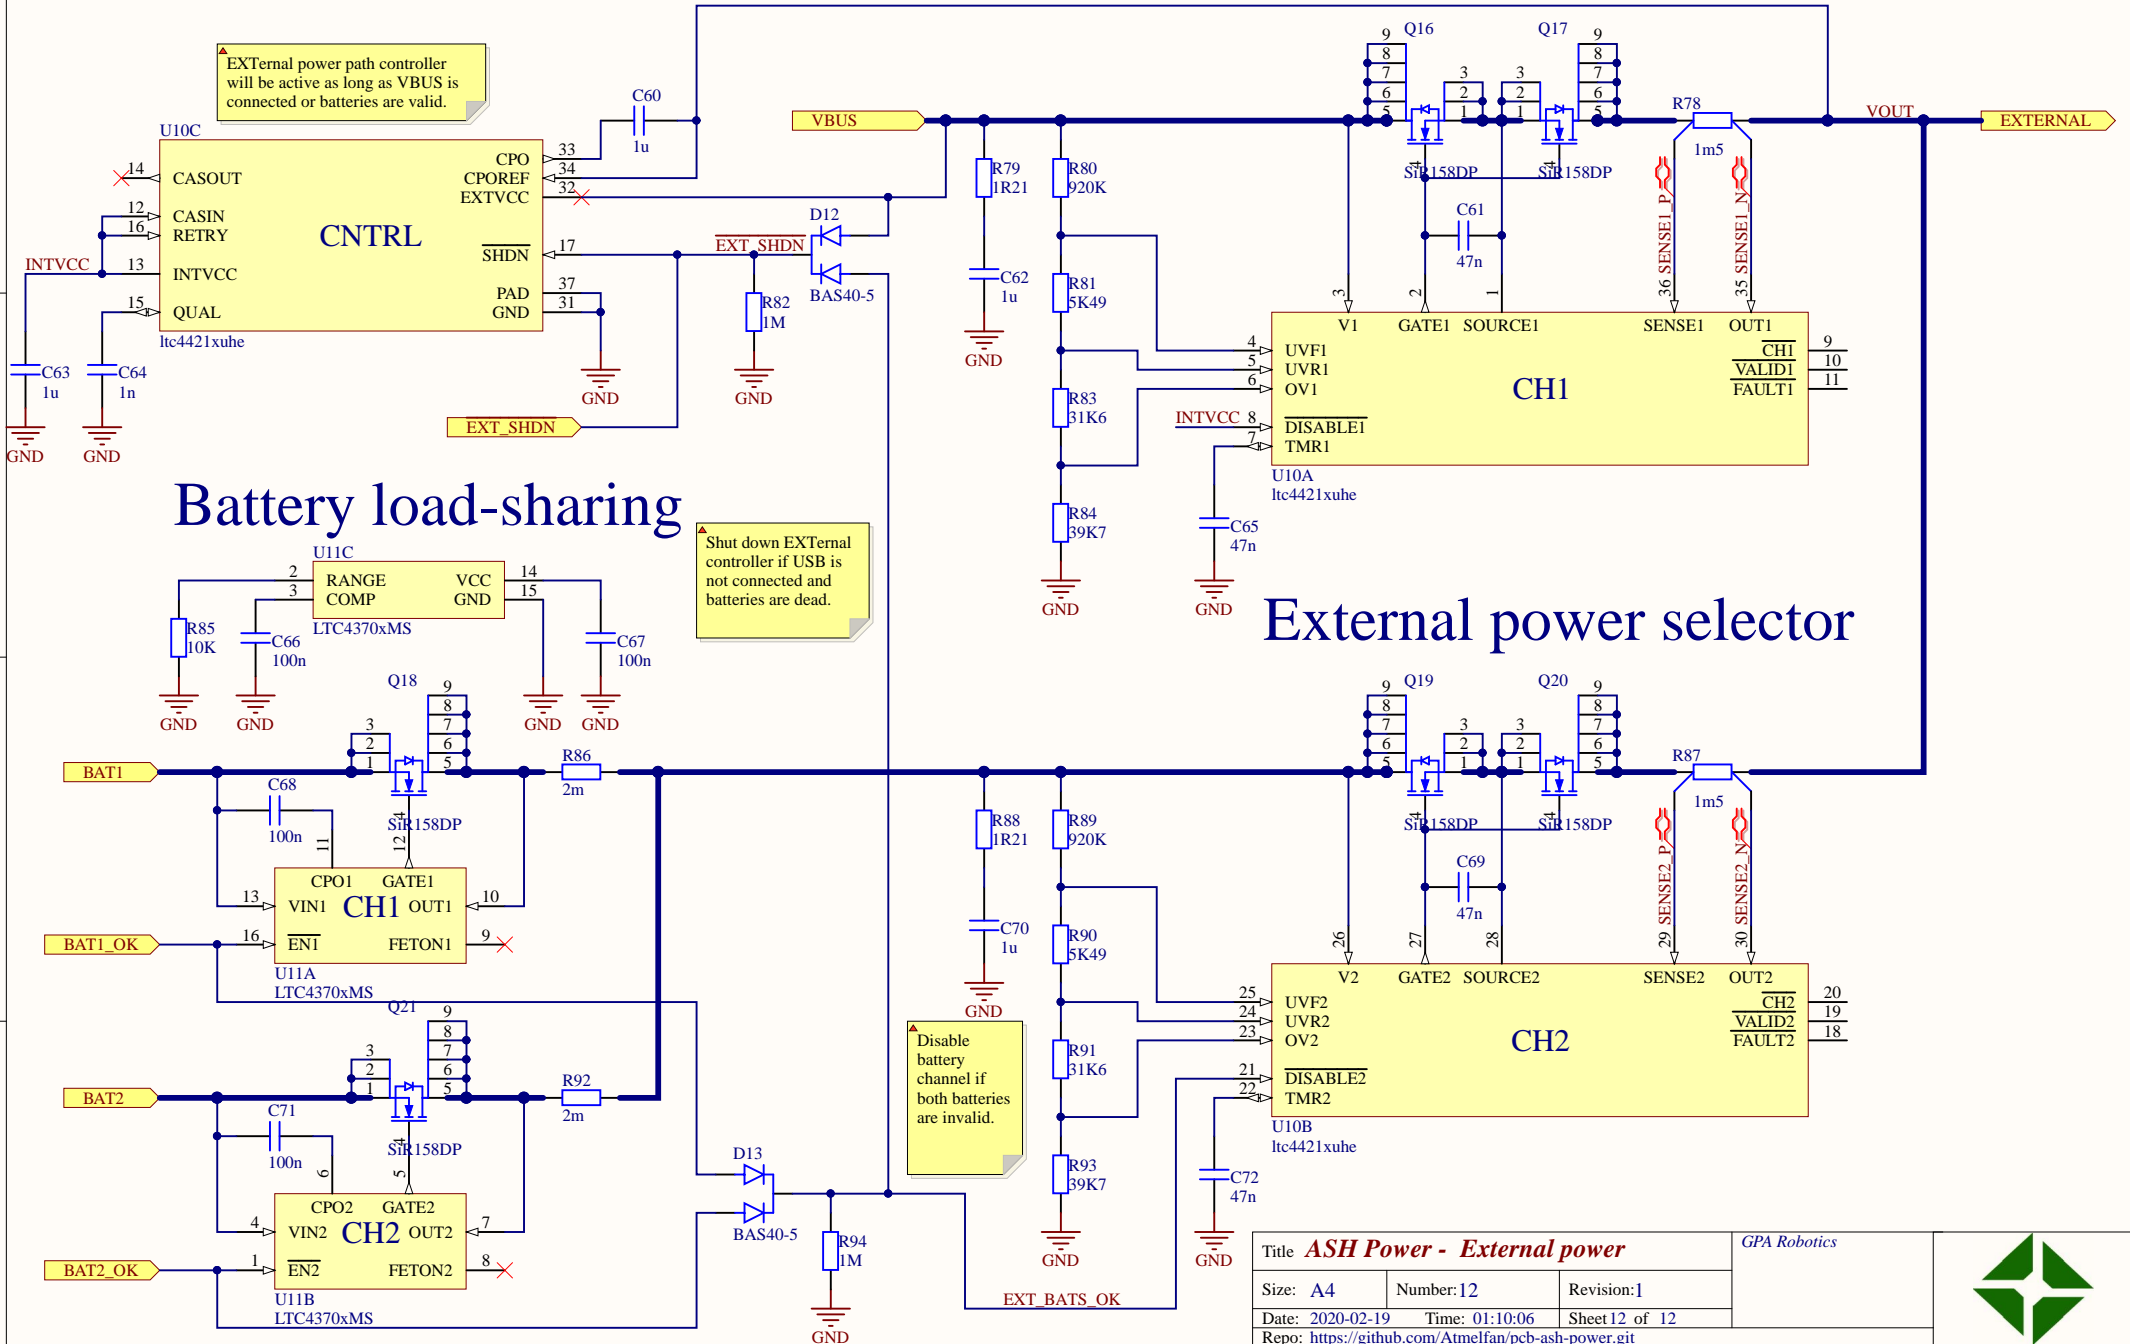

Title **ASH Power - External power**

GPA Robotics

Size: A4

Number: 12

Revision: 1

Date: 2020-02-19

Time: 01:10:06

Sheet 12 of 12

Repo: <https://github.com/Atmelfan/pcb-ash-power.git>

