

Figure 3: Allow sub-dissector to reassemble TCP streams

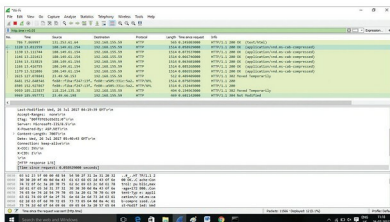


Figure 4: Response time

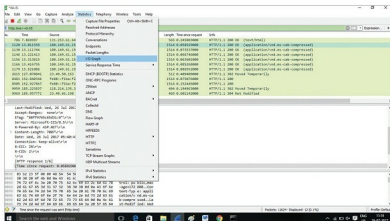


Figure 5: Statistics --> I/O graph

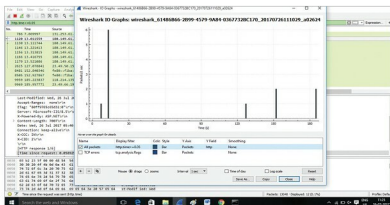


Figure 6: Visualisation of HTTP responses

Step 3: We now filter the requests and response sent from the local PC to Wikipedia and vice versa. Start filtering the IP of www.wikipedia.org (a simple *traceroute* or *pathing* can reveal the IP address of any Web server) and your local PC IP (a simple *ipconfig* for Windows and *ifconfig* for Linux can reveal your local PC IP).

Syntax: `ip.addr== 91.198.174.192 && ip.addr == 192.168.155.59`

Step 4: In order to view the response of HTTP, right-click on any response packet (HTTP/1.1). Go to *Protocol preference* and then uncheck the sub-dissector to reassemble TCP streams (marked and shown in Figure 3).

- If the TCP preference 'Allow sub-dissector to reassemble TCP streams' is off, the *http.time* will be the time between the *GET* request and the first packet of the response, the one containing 'OK'.
- If 'Allow sub-dissector to reassemble TCP streams' is on and the HTTP reassembly preferences have been left at their defaults (on), *http.time* will be the time between the *GET* request and the last packet of the response.
- *Procedure:* Right-click on any HTTP response packet -> Protocol preference -> uncheck 'Reassemble HTTP headers spanning multiple TCP segments' and 'Reassemble HTTP bodies spanning multiple TCP segments'.

Step 5: Create a filter based on the response time as shown in Figure 4, and visualise the HTTP responses using an I/O graph as shown in Figure 5.

Syntax: `http.time >= 0.050000`

Step 6: To calculate the delta (delay) time between request and response, use *Time Reference (CTRL-T)* in the GUI for easy delta time calculation.

Step 7: In order to display only the HTTP response, add a filter *http.time >= 0.05000* in the display filter. The graph, as shown in Figure 6, depicts the result of the HTTP responses (delta time).

By: M. Kannan, Poomanam and Prem Latha

M. Kannan is an associate professor and head of the department of electronics engineering, Madras Institute of Technology. His research interests include computer networks, VLSI, embedded systems and wireless security. Poomanam and Prem Latha are specialists in VLSI at the Madras Institute of Technology, Anna University. Their research interests include computer networks, VLSI and embedded design.