

Fig. 3: An actual-size, single-side PCB for the automatic fan controller for ACs

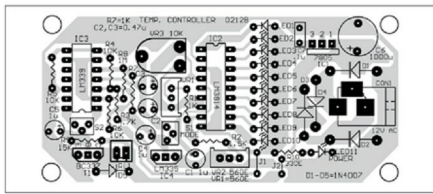


Fig. 4: Component layout for the PCB

PARTS LIST

Semiconductors:

- IC1 - 7805, 5V regulator
- IC2 - LM3914 bar-graph display
- IC3 - LM339 quad precision comparator
- IC4 - LM335 temperature sensor
- T1 - BC337 npn transistor
- D1-D5 - 1N4007 rectifier diode
- LED1-LED11 - 5mm LED

Resistors (all 1/4-watt, 25 per cent carbon):

- R1, R7 - 1-kilo-ohm
- R2 - 1.5 kilo-ohm
- R3 - 4.7-kilo-ohm
- R4-R6 - 10-kilo-ohm
- R8 - 1-mega-ohm
- R9 - 15-kilo-ohm
- R10 - 330-ohm
- VR1, VR2 - 560-ohm preset
- VR3 - 10-kilo-ohm potentiometer

Capacitors:

- C1, C4, C5 - 1µF, 16V electrolytic
- C2, C3 - 0.47µF, 16V electrolytic
- C6 - 1000µF, 35V electrolytic
- C7 - 0.1µF ceramic disk

Miscellaneous:

- X1 - 230V AC primary to 12V, 500mA secondary transformer
- RL1 - 12V, IC/O relay
- S1, S2 - SPDT switch

as a pull-up resistor for comparator A1, while resistors R7 and R8 provide a hysteresis voltage. The inverting input of A1 at pin 4 is connected to the wiper of potentiometer VR3.

70% होय! आम्ही घडवतो **100%** कार्यक्षम इंजिनिअर्स अकार्यक्षम व बेरोजगार इंजिनिअर्स
Nasscom Report



16 वर्षांची दैविष्यमान परंपरा
ढाणेज् मेघा इंजिनिअरींग क्लासेस
लक्ष्मी प्लाझा, कल्याणीनगर, सदरबझार, सातारा.
फोन : 02162-235599 मोबा. 9822071571
An ISO 9001-2008 Certified ENGG.CLASSES

Introducing ATMEGA128 Based

AW128V1

Complete AVR Development Board



AVR GATEWAY
B01 Development Board

Made in INDIA

Also Available:- Other ATMEGA, PIC & AVR Programmer & Development Boards

AMATEUR WORLD Fl-3, 1/6 Gandhi Colony, Kolkata - 40
MB:09339003645, sales@amateurworld.in, www.amateurworld.in