

The code is also indicated by LED1 through LED4, respectively. Encoder IC1 encodes the code, which is then transmitted using RF transmitter

module TX1. Regulator 7805 provides regulated 5V supply to the circuit.

Accelerometer module. An accelerometer is an electromechanical

device that can measure acceleration of anything that it is mounted on. The accelerometer module used here is based on ADXL335 triple-axis accelerometer from Analog Devices. The sensor has a full sensing range of $\pm 3g$.

Robot. Fig. 4 shows the circuit of the wireless robot. It comprises RF receiver module RX1, regulator 7805 (IC4), decoder HT12D (IC5), microcontroller AT89C52 (IC6), motor

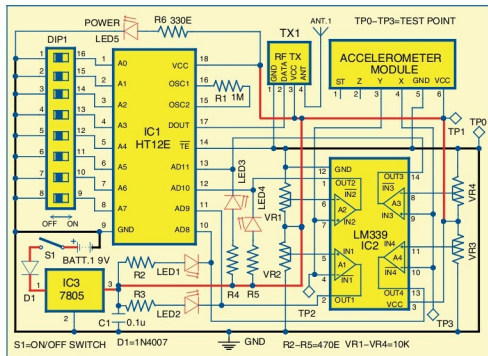


Fig. 3: Circuit of gesture transmitter

Test Points in Figs 2 and 3

Test point	Details
TP0, TP4	0V, GND
TP1, TP5	5V
TP2	Input from Y-axis
TP3	Input from X-axis
TP6	Reset, 5V when S3 pressed
TP7	Input for motor driver IC7
TP8	Input for motor driver IC7
TP9	Input for motor driver IC7
TP10	Input for motor driver IC7

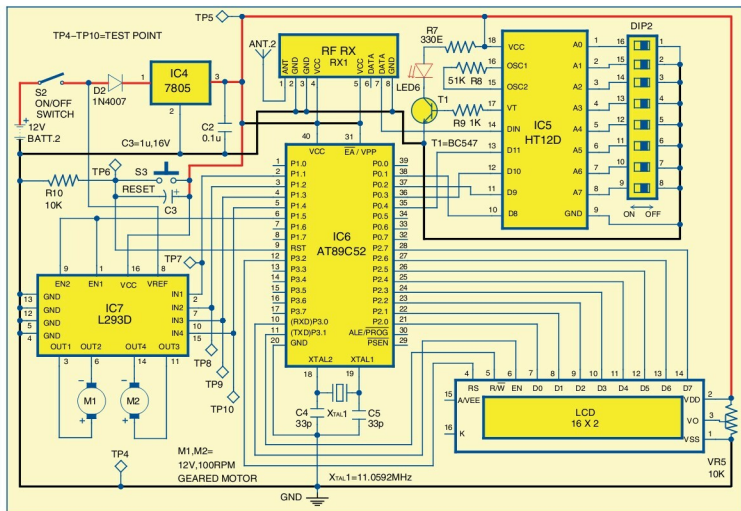


Fig. 4: Circuit of the robot