

MADHURAM MISHRA

Fritzing can be seen as an electronic design automation (EDA) tool

for non-engineers. It has a code-view option, where one can modify code and upload it directly to an Arduino device.

There is a huge library in Fritz-ing to help us make shields for different Arduino and Raspberry Pi boards. We can get the artwork by

simply making the schematic, which can be further adjusted in Arduino shield form. There are many routing options available in the software. In this article, we explain the making of an Arduino shield using Fritzing version 0.91 for Arduino UNO R3 for a single-sided PCB.

Steps for making an Arduino shield using Fritzing are:

1. Download Fritzing. The downloaded file can be used directly; you need not install it.
2. Go to Breadboard as shown in Fig. 2. Draw a proper connection diagram of the desired circuit using the component library in the software. Cross-check the connections in the software.
3. Go to Schematic and check if the connections are done in Breadboard. We can directly design a circuit in Schematic. For those who are new to

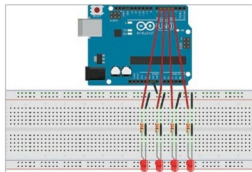


Fig. 1: Assembled circuit on a breadboard interfaced with Arduino board



Fig. 2: Fritzing Breadboard section

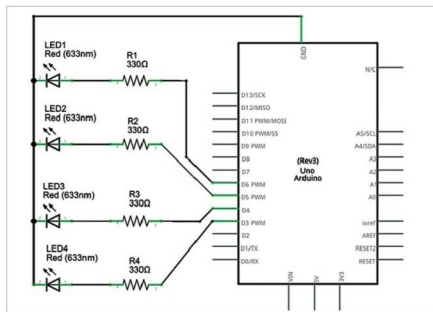


Fig. 3: Schematic diagram made using Fritzing