

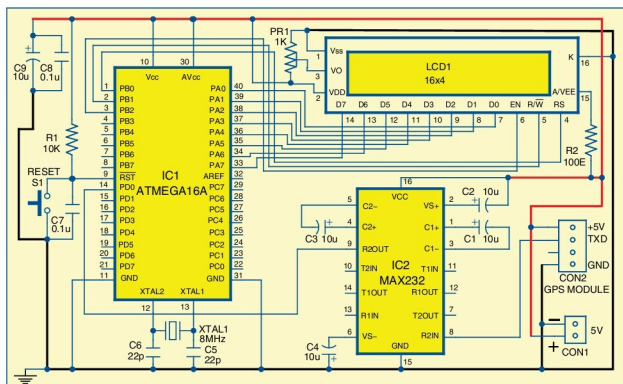


Fig. 3: Circuit diagram of the GPS receiver

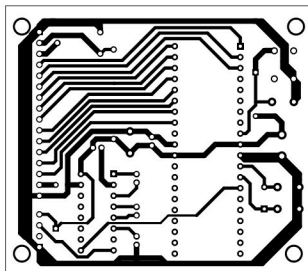


Fig. 4: Actual-size PCB pattern of the GPS receiver

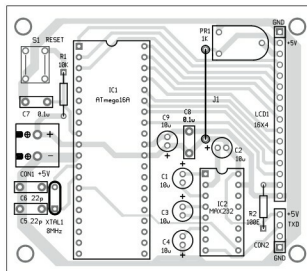


Fig. 5: Component layout of the PCB

minerals for interfacing, namely, Tx, Rx and Gnd. It gives a series of strings as serial output, which is connected to RS232-level side-input pin R21N (pin 8). Output is taken from TTL-level side-output pin R2OUT (pin 9), which is given to serial receive pin RXD (pin 14) of IC1.

Operation of the circuit depends on the GPS receiver module. IC1 receives a series of strings from the GPS module and extracts the required string from a bunch of ten strings in real-time. Out of these, it extracts the string that starts with \$GPRMC. It simply discards all others.

From the extracted string, it extracts all necessary information

Read more stories on solar at
www.electronicb2b.com

TOP
SOLAR STORIES

- Solar lantern
- Inverters for solar installation
- India's regional solar market
- Solar energy for your home

ELECTRONICS
B2B
 INDUSTRY IS AT A

CLICK OF A BUTTON

Log on to www.electronicb2b.com and be in touch with the Electronics B2B Fraternity 24x7