


Electronics Projects Vol. 26 is the latest volume in the series, available in digital form.

It is a compilation
of 21 construction
projects and 71
circuit ideas published
in Electronics For You
magazine.



This collection of tested
circuit ideas and construction
projects in a handy volume
would interest all classes of
electronics enthusiasts—be
they students, teachers,
hobbyists or professionals!

Electronics Projects Vol. 26
is available on the following
digital magazine stores:

- www.lulu.com
- www.magzter.com
- rockstand.in
- www.readwhere.com
- pothi.com

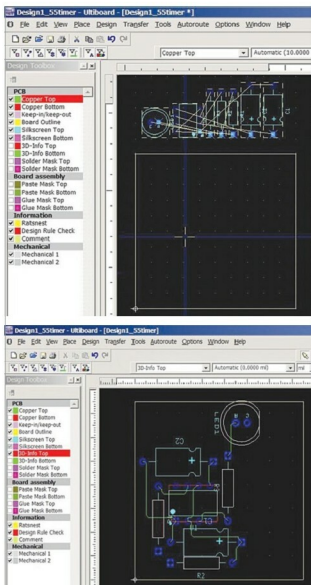


Fig. 11: PCB designing in Ultiboard

market. Selecting each component
will show the details related to the
particular component, like symbol,
manufacture, model, footprint and
so on.

5. Place the required compo-
nents on the schematic window
and connect each terminal using
mouse cursor drag-and-drop tech-
nique. Right-clicking options will
give other changes like rotation,
value of the components and rate.

6. After successful connection
and parameter entry, simulate the
circuit. Before running the cir-
cuit, save the project. Then, run

the circuit from
Simulate→Run in
the menu (Fig. 9).

7. For PCB
design, ensure that
each and every
component has its
own PCB footprint
as shown in Fig.
10. (In Multisim,
if footprints are
available, compo-
nents will be in
blue colour, other-
wise these will be
in black.) These
footprints will
ensure the size
and pin positions
of components.
A footprint may
vary according to
the range and rate
variation and even
the manufacturer.
In Multisim we can
create or duplicate
a footprint.

8. After con-
firming the pres-
ence of footprint of
each component,
move to the next
tool, Ultiboard, for
PCB design. Either
open the project
file in Ultiboard
or go to option

Transfer→Transfer to Ultiboard.
Select the file with extension .ewnet
and open it.

9. The opened black window
will show a yellow square and
components are placed outside
the yellow square. This square is
the area of PCB layout whose size
can be decided later. Arrange the
components in their proper places
so that there is good routing (Fig.
11). We can also use the provision
of automatic-place-and-routing op-
tion from menu Autoroute→Start/
Resume Autoroute.

To be continued...