

6.1 Interrupts

1) Consider the system diagram in Figure 1 of case study notes.

- The processor UART peripheral in its Serial I/O module is configured to receive data with format of 1 start-bit, 7 data-bits, 1 parity-bit and 1 stop-bit.
- Each time the UART peripheral receives a character, it'll store the data into a buffer.
- It will then interrupt the CPU to notify CPU that there is data available.
- The CPU will then execute the Interrupt Service Routine (ISR) to read the character received.
- Interrupt Latency is the term used to describe the time between interrupt request and entrance to ISR.
- The minimum interrupt latency for the CPU is 10 μ s and it takes 90 μ s for the CPU to execute the instructions in the ISR (read the received data from the buffer).
- Assume that the UART data is transferred back to back i.e. no delays between each UART packets.

What is the maximum baud rate that can be supported with this UART interface?

2) The specifications of the system in Figure 1 (case study notes) requires the buttons to be asserted 400 times over a 24-hour period. Given that the processor consumes 0.1mA current when it is idling and 50mA when it is in active mode i.e. running code, answer the following.

- (a) Supposed polled IO technique is used to sample the button status. Given that the processor poll the buttons every 100ms, each poll requires the processor to be active for 10ms, what is the average current consumed over the 24-hour period?
- (b) If interrupt-driven I/O is used to sample the button status, what is the average current consumed in the same 24-hour period? Given that it takes 20ms to service each interrupt, including interrupt latency and ISR execution.
- (c) Given that a battery with capacity of 2000mAh means that it can supply 2000mA continuously for 1 hour, or 1000mA continuously for 2 hours. How long would a battery of 2000mAh last when used in (a) and (b) above?

1) Consider the system diagram in Figure 1 of case study notes.

- The processor UART peripheral in its Serial I/O module is configured to receive data with format of 1 start-bit, 7 data-bits, 1 parity-bit and 1 stop-bit.
- Each time the UART peripheral receives a character, it'll store the data into a buffer.
- It will then interrupt the CPU to notify CPU that there is data available.
- The CPU will then execute the Interrupt Service Routine (ISR) to read the character received.
- Interrupt Latency is the term used to describe the time between interrupt request and entrance to ISR.
- The minimum interrupt latency for the CPU is $10\ \mu\text{s}$ and it takes $90\ \mu\text{s}$ for the CPU to execute the instructions in the ISR (read the received data from the buffer).
- Assume that the UART data is transferred back to back i.e. no delays between each UART packets.

What is the maximum baud rate that can be supported with this UART interface?

100×10^{-6} per instruction

One inst is 10 bit

$$1 \div 100 \times 10^{-6} \text{ per second} \times 10 = 100,000 \text{ bps}$$

2) The specifications of the system in Figure 1 (case study notes) requires the buttons to be asserted 400 times over a 24-hour period. Given that the processor consumes 0.1mA current when it is idling and 50mA when it is in active mode i.e. running code, answer the following.

(a) Supposed polled IO technique is used to sample the button status. Given that the processor poll the buttons every 100ms , each poll requires the processor to be active for 10ms , what is the average current consumed over the 24-hour period?

$$50\text{mA} \times 0.1 + 0.1 \times 0.9 = 5.09\text{mA}$$

(b) If interrupt-driven I/O is used to sample the button status, what is the average current consumed in the same 24-hour period? Given that it takes 20ms to service each interrupt, including interrupt latency and ISR execution.


$$50\text{mA} \times \frac{400 \times 20 \times 10^{-3}}{24 \times 60 \times 60} + \frac{24 \times 60 \times 60 - 400 \times 20 \times 10^{-3}}{24 \times 60 \times 60} \times 0.1 = 0.1046\text{mA}$$

(c) Given that a battery with capacity of 2000mAh means that it can supply 2000mA continuously for 1 hour, or 1000mA continuously for 2 hours. How long would a battery of 2000mAh last when used in (a) and (b) above?

yes

6.2 Direct Memory Access (DMA)

- 3) Given that DMAC and CPU share one system bus, list four possible factors that might affect the transfer rate of a DMAC and explain how they affect the DMAC transfer rate.
- 4) Consider the system in Figure 1 (Case study notes). Given that
- The processor's system bus is capable of supporting simultaneous transfer of up to 3 bytes of data at one time.
 - DMA is used to transfer video data from Memory to Display Controller module.
 - Each video pixel data consist of three bytes (Red, Green, Blue) and are transferred simultaneously on the system bus on each bus cycle.
 - Each transfer on the system bus takes 5ns and transfer of the bus control between the CPU and the DMAC takes 100ns.
 - Assume that DMAC is using Fetch-and-Deposit DMA.
 - Note that 1Kbyte = 1024 Byte.

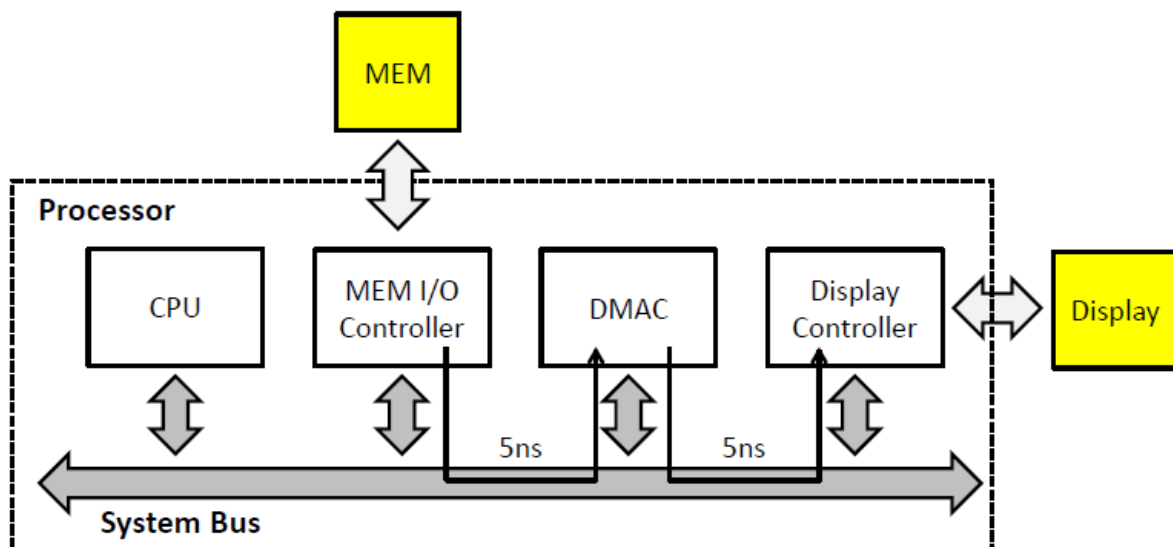

- (a) Given that the video is output at a rate of 30 frames per second and each video frame has a resolution of 1920x1080 pixels. If burst-mode was used by the DMAC to burst one frame of video data at a time, would the DMAC be able to transfer each video frame completely?
- (b) Repeat the calculation if the DMAC is using cycle-stealing mode, assume that DMAC needs to wait at least 5 instructions before it could request for control of the system bus again.

- 3) Given that DMAC and CPU share one system bus, list four possible factors that might affect the transfer rate of a DMAC and explain how they affect the DMAC transfer rate.

DMAC mode

Bus busyness

I/O speed

Priorities

- The processor's system bus is capable of supporting simultaneous transfer of up to 3 bytes of data at one time.
- DMA is used to transfer video data from Memory to Display Controller module.
- Each video pixel data consist of three bytes (Red, Green, Blue) and are transferred simultaneously on the system bus on each bus cycle.
- Each transfer on the system bus takes 5ns and transfer of the bus control between the CPU and the DMAC takes 100ns.
- Assume that DMAC is using Fetch-and-Deposit DMA.
- Note that 1Kbyte = 1024 Byte.

- (a) Given that the video is output at a rate of 30 frames per second and each video frame has a resolution of 1920x1080 pixels. If burst-mode was used by the DMAC to burst one frame of video data at a time, would the DMAC be able to transfer each video frame completely?

$$(100\text{ns} + 5\text{ns} \times 2 \times 1920 \times 1080 + 100\text{ns}) \times 30$$

- (b) Repeat the calculation if the DMAC is using cycle-stealing mode, assume that DMAC needs to wait at least 5 instructions before it could request for control of the system bus again.

$$\left(\frac{1}{400 \times 10^6} \times 5 + 100\text{ns} + 100\text{ns} + 10\text{ns} \right) \times 1920 \times 1080 \times 30 = 14.6\text{s}$$

$$400\text{ MHz} =$$

