


ADE



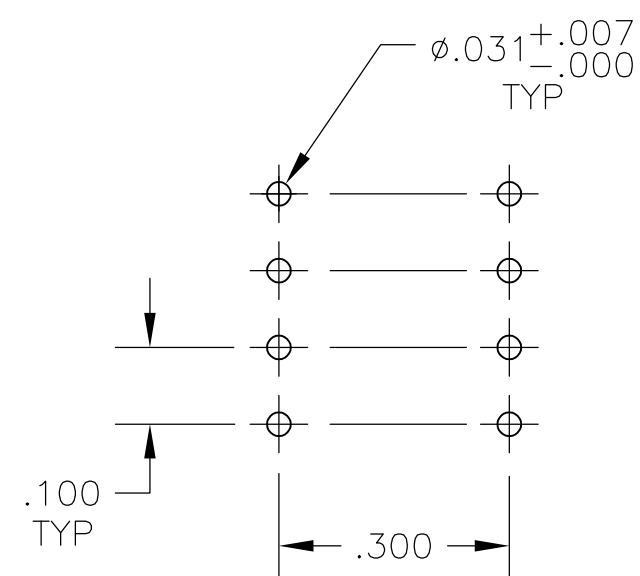

P.C. LAYOUT INSERT MOUNT

MOVING CONTACT, CU ALLOY, PLATE-GOLD FLASH/NICKEL

1. SWITCHES TO BE RECEIVED IN THE "OFF" POSITION AND PACKAGED IN CLEAR TUBES TO ACCOMMODATE AUTO-INSERTION.
2. TOP SURFACE TO BE CLEARLY MARKED AS SHOWN
3. SWITCHES TO BE BLACK WITH WHITE ACTUATORS AND MARKINGS.
4. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

ADE1204	.142	1.280	12	1-1825057-0
ADE1004	.138	1.078	10	1825057-9
ADE0904	.138	.978	9	1825057-8
ADE0804	.138	.878	8	1825057-7
ADE0704	.138	.778	7	1825057-6
ADE0604	.138	.678	6	1825057-5
ADE0504	.138	.578	5	1825057-4
ADE0404	.138	.478	4	1825057-3
ADE0304	.138	.378	3	1825057-2
ADE0204	.138	.278	2	1825057-1
T&B P/N	DIM H	DIM L	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA		10FEB05		 TE Connectivity	
DIMENSIONS: INCHES		CHK M.SARVER		—			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME DIP SWITCH, ADE THRU HOLE			
		0 PLC ± —					
		1 PLC ± —					
		2 PLC ± —					
3 PLC ± .012		APVD M.SARVER		SIZE A2			
4 PLC ± —		PRODUCT SPEC					
ANGLES ± —		APPLICATION SPEC					
MATERIAL —		FINISH —		WEIGHT —		CAGE CODE 00779	
				DRAWING NO C-1825057		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1	
						REV P	