


Title		
Size	Number	Revision
A3		
Date:	5-17-2025	Sheet of
File:	C:\Users\...\MBS-SM.SchDoc	Drawn By:

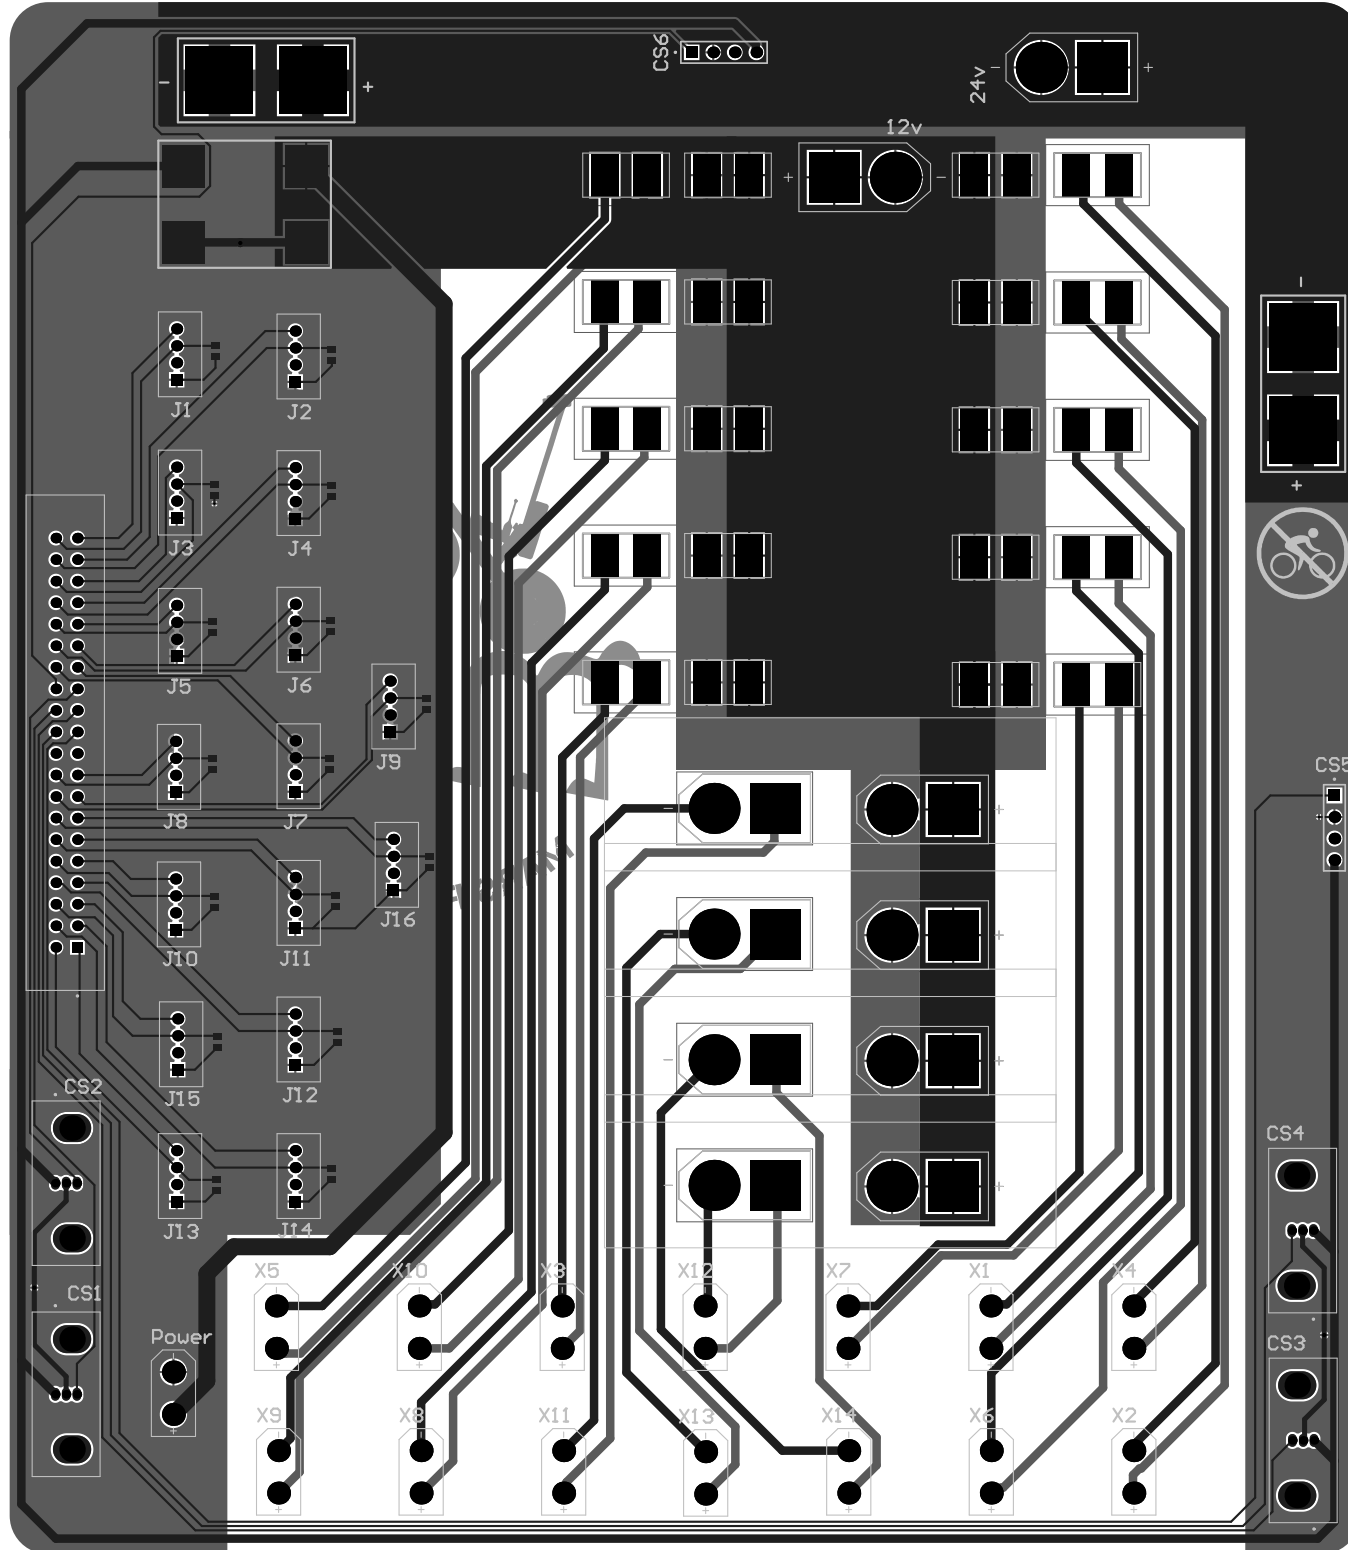

Line #	Name	Description	Designator	Revision ID	Revision Status	Quantity	Manufacturer 1	Manufacturer Part Number 1	Manufacturer Lifecycle 1	Supplier 1	Supplier Part Number 1	Supplier Unit Price 1	Supplier Subtotal 1
	XT60-M	Plug; DC supply; XT60; male; PIN: 2; for cable; soldered; 30A; 500V	12v, 24v			2							
	md_vertical		13s-1, 13s-2, 13s-3, 13s-4, 13s-5, 13s-6, 13s-7, 13s-8, 13s-9, 13s-10			10							
	MD20 A		20a-11, 20a-12, 20a-13, 20a-14			4							
	3-1761603-3	AMP-LATCH 40 Position 2.54 mm Dual Row Through-Hole Straight Pin Header	40H			1							
	microbuck		Buck			1							
	WCS1700	The Winson WCS1700 current sensor provides economical and preciseresolution for both DC and AC current sensing in industrial, commercial andcommunicatio ns systems.	CS1, CS2, CS3, CS4			4							
	MTSW-104-07-G-S-170		CS5, CS6			2							
	110990030	GROVE2MM4PIN VERT CONN 10PCS	J1, J2, J3, J4, J5, J6, J7, J8, J9, J10, J11, J12, J13, J14, J15, J16			16							
	XT30UPB-M	Socket; DC supply; XT30; male; PIN: 2; on PCBs; THT; yellow; 15A; 500V	Power, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13, X14			15							
	CRCW060310K0FK EA	Chip Resistor, 10 KOhm, +/- 1%, 100 mW, -55 to 155 degC, 0603 (1608 Metric), RoHS, Tape and Reel	R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16			16							
	xt90		XL, XR			2							