

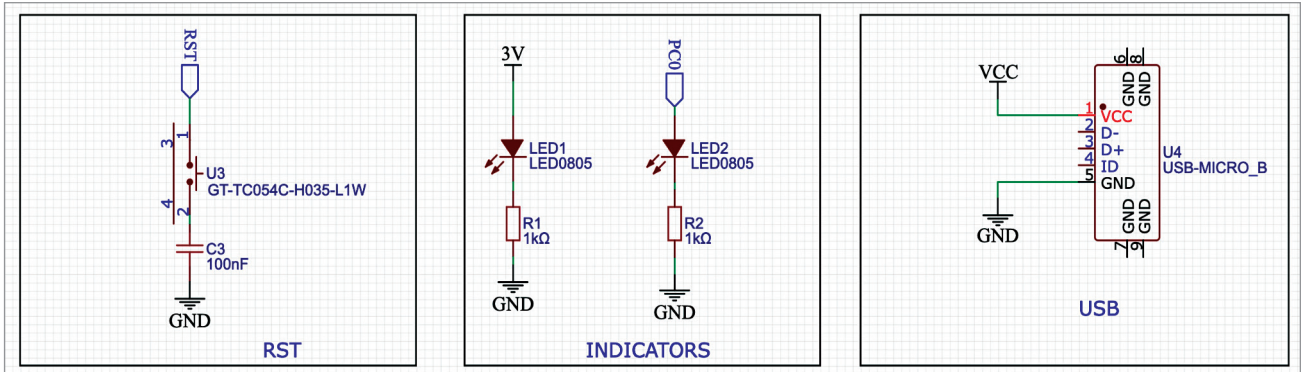


Fig. 3: RISC-V chip circuit configuration

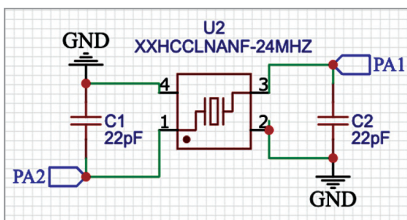


Fig. 4: Adding crystal

of LM1117 and the ground, provides stability by minimising output voltage fluctuations and improving transient response.

Reset and indicators

The reset button is a fundamental component in any embedded sys-

tem, allowing users to initiate a controlled restart. In this design, a reset button is connected to Pin PD7 of the CH32V003F4U6 microcontroller. A capacitor is added to provide a brief delay, ensuring a stable and noise-free reset signal.

To provide users with a visual

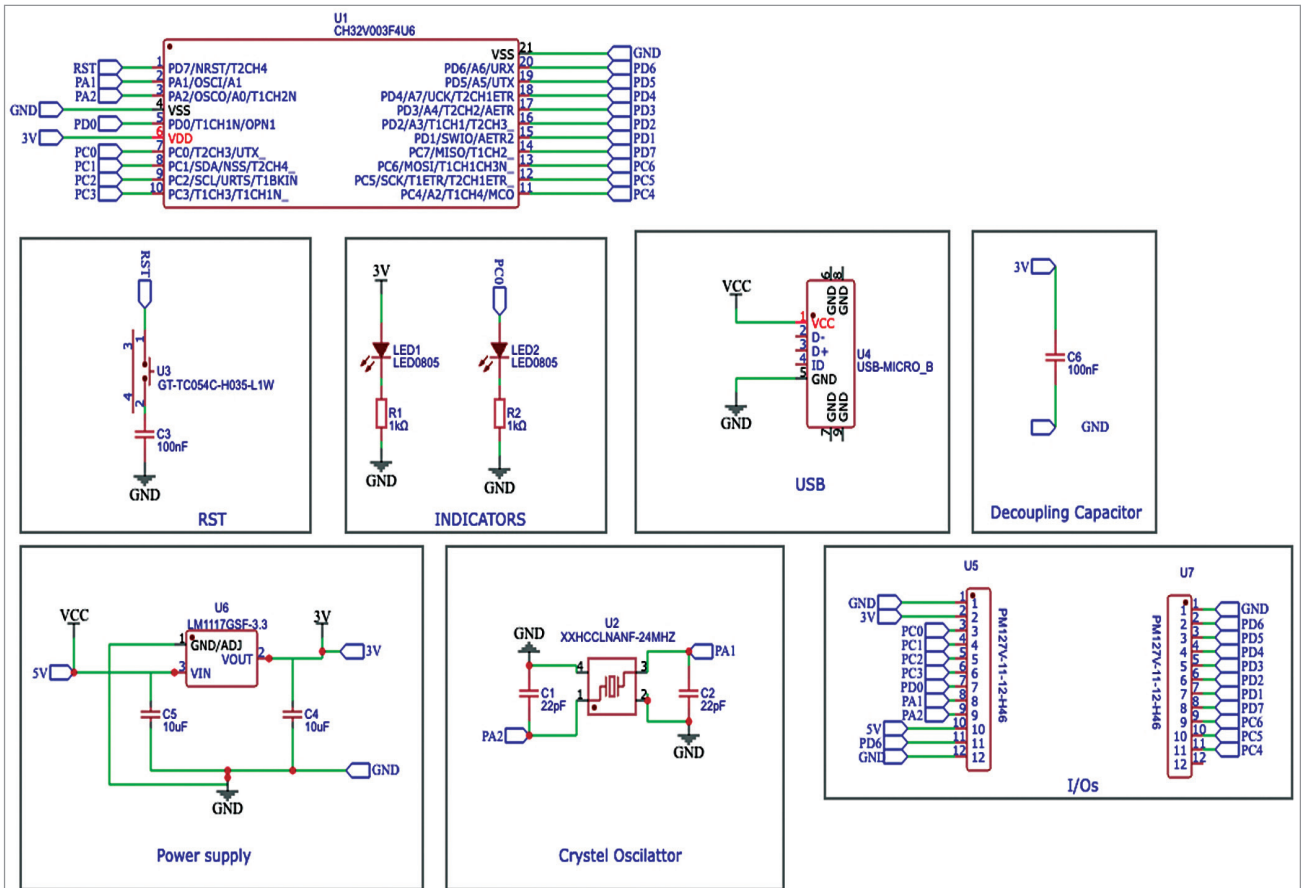


Fig. 5: CH32V00 reference design